


Runar HDR Cinemascope

0.9 mm Pixel Pitch, Flagship Residential 5K Cinemascope HDR LED Wall

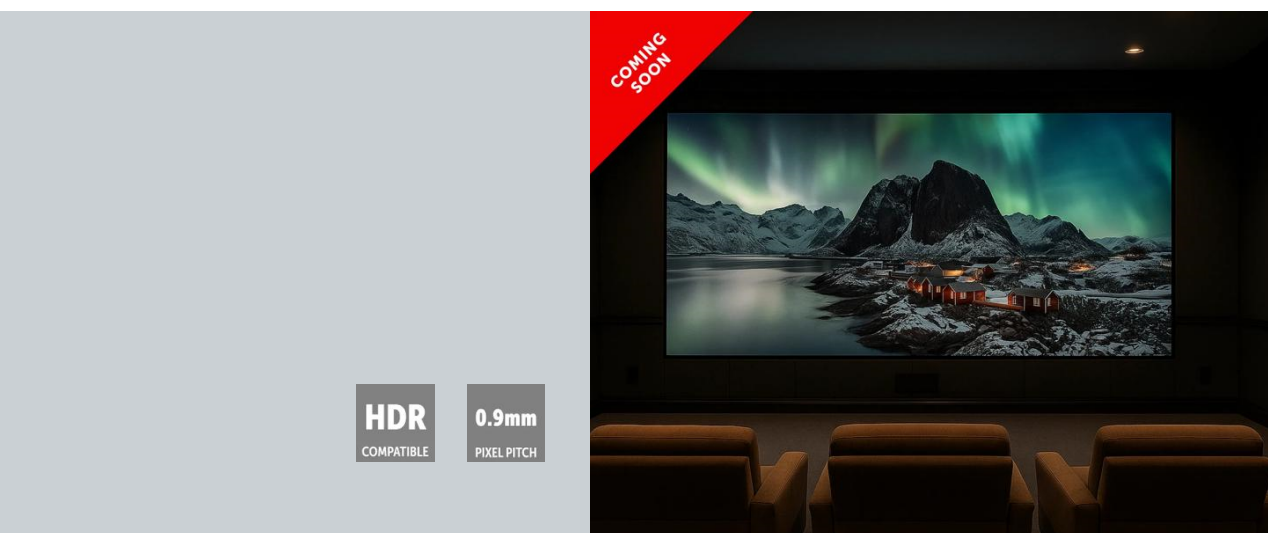

- 0.9 mm pixel pitch
- 5K Cinemascope resolution (5,120 x 2,160)
- 4.80 m wide image (205" diagonal)
- State-of-the-art Micro LED in Package (MIP) technology
- Stunning 1,000 nits brightness
- Ultra-deep 0.005 cd/m² black level
- Full DCI-P3 coverage
- 4K (4,096 x 2,160) option available

More than a display, Barco Runar™ is a statement of presence. Behind minimalist design is extraordinary power, inspired by the quiet strength and elemental purity of the Nordic heritage that inspired it.

Barco Runar combines precision and elegance with technical prowess to create an immersive experience that commands attention without ever raising its voice.

While Runar DCI was designed to bring DCI-certified cinema-grade LED technology to luxury residences, the new Runar HDR LED brings the same MicroLED-in-Package (MIP)

platform and exceptional visual performance to everyday entertainment, from blockbuster movies to live sports, concerts and gaming.

Delivering up to 1,000 nits of brightness, Runar HDR LED reveals the full impact of HDR content while maintaining outstanding image quality even in ambient light.

With deep blacks and a 200,000:1 contrast ratio, it delivers remarkable shadow detail, brilliant highlights, and exceptional realism.

*Specifications are preliminary and subject to change.

技術仕様

RUNAR HDR CINEMASCOPE

一般仕様	
解像度	5K Cinemascope: 5,120 x 2,160 pixels
ピクセルピッチ	0.9 mm
輝度	Up to 1,000 nits
画像処理	16 bit
色深度	12 bit
コントラスト	Up to 200,000:1
HDR	Yes
フレームレート	Up to 120 fps
3D	Yes
寸法（幅x奥行きx高さ）	4,800 x 2,025 x 75.5 mm / 15.7' x 6.6' x 0.25'
重量	295 kg / 650 lbs
動作湿度	10 -90%
動作温度	-10 °C to + 40 °C / 14 °F to 104 °F
消費電力	Standby: 940W 48nits: 1,130W (max), 990W (typical) 300nits: 1,750W (max), 1,140W (typical) 500nits: 2,130W (max), 1,240W (typical) 1,000nits: 3,250W (max), 1,520W (typical)
BTU/時	Standby: 3,210 BTU/h 48nits: 3,860 BTU/h (max), 3,380 BTU/h (typical) 300nits: 5,970 BTU/h (max), 3,860 BTU/h (typical) 500nits: 7,270 BTU/h (max), 4,230 BTU/h (typical) 1,000nits: 11,090 BTU/h (max), 5,190 BTU/h (typical)
電源要件	AC110V 15Ax2 or AC220V 8Ax2
Inputs	HDMI 2.1 (up to 4K 120p 444 10bit)
Audio	HDMI 2.1
保証	3 years (Expandable to 5 years)

生成日:18 Sep 2026

© 2026 Barco nv.(C) Barco. All rights reserved. （無断転載を禁ず。） 書面による許可なく全部または一部を複製することは禁止されています。すべてのブランド名および製品名は、それぞれの所有者の商標、登録商標、または商号です。継続的な技術革新により、情報および技術仕様は予告なく変更される場合があります。最新の仕様についてはwww.barco.comをご確認ください。