


# Balder Cinemascope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

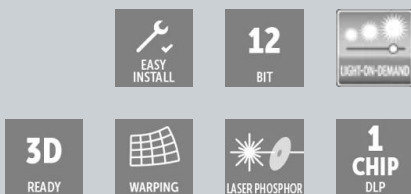

- **Theater & Media Room Series**
- **5K UHD Resolution (5,120 x 2,160)**
- **Laser Phosphor**
- **Up to 5,600 ANSI Lumens**

Balder incorporates our unique PULSE electronics platform, inhouse designed laser engine and the world's finest optical components, fusing them together with the imaging device technology chosen by 9 out of 10 professional cinemas: DLP.

## Professional grade optics

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own.

Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

## State of the art electronics

Thanks to our unique single step processing technology (SSPTM), Pulse electronics are designed to process 4K UHD, HDMI™ 2.0a, HDCP 2.2 and HDR10 signals with extremely low latency.

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display flawless 5K UHD (5,120 × 2,160 px), 2.37:1 aspect ratio images on screen.

### **CinemaScope**

Our unique aspect ratio detection system, automatically crops and scales content to fit the appropriate screen area, ranging from 1.78:1 to 2.39:1.

Manual cropping is also available for custom configurations such as cinemascope subtitle support, where only the top black bar is removed from none 1.78:1 content, preserving the subtitles at the foot of the image.

### **Liquid cooling**

Balder has departed from a pure fan based cooling system, opting instead for a liquid cooling PID regulation system. This combined with our simulation grade warp engine allows Balder to operate at any angle (free rotation), offering new possibilities when it comes to architectural integration.

## 技術仕様

## BALDER CINEMASCOPE

### 一般仕様

プロジェクタータイプ	Single chip DLP
光源寿命	20,000 - 60,000 hours Laser intensity dependent
CLO (定常光出力)	Yes
光学ダウザー	Yes
テクノロジー	0.9" DMD™
統合ウェブサーバー	Yes
解像度	5,120 x 2,160 (5K UHD)
診断	via Prospector web interface
アスペクト比	2.37:1 (CinemaScope)
光源	Laser phosphor
光出力	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
コントラスト比	1,800:1 Sequential 450:1 ANSI
明るさの均一性	>90%
入力解像度	From VGA up to 4K UHD (3,840 x 2,160) @ 60Hz or up to 2,560 x 1,600 @ 120Hz
レンズの範囲	(R9802232) -EN68 (0.30:1) -Periscope Lens (requires vertical installation) (R9801832) -FLDX UST (0.41:1) -90°ns (R9802244) -EN67 (0.65:1) (R9802243) -EN66 (0.80 - 1.21:1) (R9802003) -EN76 (0.95 - 1.30:1) (R9802242) -EN63 (1.20 - 1.70:1) * (R9802241) -EN61 (1.70 - 2.50:1) * (R9801211) -EN44 (2.50 - 4.60:1)  * Standard Lens Option(s)
レイテンシー	TBD
光学レンズシフト	Up to 122% vertical lens shift & up to 40% horizontal lens shift (depending on lens selection)  Visit the Barco Residential Lens Calculator for further information <a href="#">Download Lens &amp; Airflow Data Here</a>
色補正	P7 RealColor™
スタンバイ電力	Standby ECO Mode: 110v -0.73W (with LAN Connection) 230v -0.82W (with LAN Connection)
色域	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
画像処理	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
向き	360° Rotation
ネットワーク接続	10/100 Ethernet via RJ45 connection
動作湿度	20 to 80% (relative humidity)
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details
入力	1 x HDMI™ 2.0 (HDCP 2.2) 1 x HDBaseT (HDCP 1.4 -9Gbps only) 2 x Dual Link DVI-D 2 x Display Port (1.2) 12G-SDI 1 x RJ45 Ethernet 1 x RS232 1 x Remote Control (RC) 3 x USB (2 x Rear, 1 x Front) DMX (1 x Input, 1 x Output)
出荷寸法	Excluding Lens 730 x 600 x 480 mm 28.7 x 23.7 x 18.9 in.

## 技術仕様

## BALDER CINEMASCOPE

Control	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant  NOTE: 12v Trigger(s) do not follow standard functionality and require an IP command to enable / disable them. Download our integration guide for more information.
出荷重量	Excluding Lens 43 kg / 94.8 lbs
電源要件	100 -240V / 50 -60Hz
標準付属品	Power Cord, Remote Control
証明書	CE, FCC Class A and cCSAus
消費電力	1,100 W -Max.
騒音レベル (25°C/77°Fの標準値)	36 dB(A)
24時間365日の稼働に対応	This projector is designed and warranted for heavy duty 24/7 operation. Specific measures and design considerations have been made in order for it to comply with stringent requirements in challenging applications.
動作温度	10 to 45 °C at Sea Level Optimal Set Point: 20 °C
動作湿度	20 to 80% relative humidity
*	Firmware upgradable Please contact an authorized Barco representative for details
BTU/時	4,000 BTU/h -Max.
エアフロー要件	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear  Clearance Requirements: Front: 1cm Left: 1cm Right: 50cm Rear: 100cm Top: 1cm
排気エアフロー	112 ft <sup>3</sup> /min @ 25 °C 190 m <sup>3</sup> /hour @ 25 °C <a href="#">Download Lens &amp; Airflow Data Here</a>
寸法 (幅x奥行きx高さ)	Excluding Lens 475 x 588 x 286 mm 18.7 x 23.1 x 11.3 in.
重量	Excluding Lens 37 kg / 81.5 lbs
保証	Limited 3 years parts and labor Extendable up to 5 years
安全要件	This projector is Risk Group 2 (RG2) according to IEC EN 62471-5. This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 6.0 is installed. Refer to the installation manual for further information.

生成日:19 May 2026

© 2026 Barco nv.(C) Barco. All rights reserved. (無断転載を禁ず。) 書面による許可なく全部または一部を複製することは禁止されています。すべてのブランド名および製品名は、それぞれの所有者の商標、登録商標、または商号です。継続的な技術革新により、情報および技術仕様は予告なく変更される場合があります。最新の仕様については[www.barco.com](http://www.barco.com)をご確認ください。