


OverView MVL-6715

Industry-standard 67" SXGA+ 4:3 LED video wall

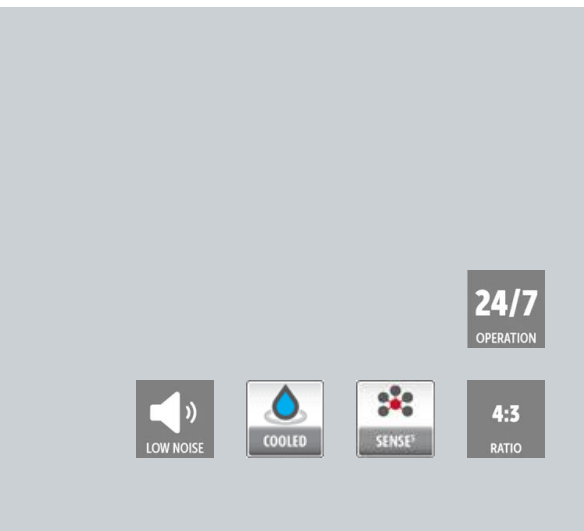

The OverView MVL-6715 is an easy to operate 4:3 LED-lit projection module that has been designed to offer the typical detail and brightness needs in SXGA+ resolution for control rooms where space is not a constraint.

Unmatched LED lifetime

Barco's unique liquid cooling system significantly reduces the temperature of the LEDs. This not only prolongs the lifetime of the LEDs (>80,000 hrs), but also allows for durably higher brightness levels. The long LED lifetime guarantees a great uptime and very low overhead costs. The use of LEDs as a light source, also results in low power consumption.

Comfortable viewing experience

To ensure good wall uniformity in terms of color and brightness levels, the OverView MVL-6715 comes with Barco's Sense⁵ automatic calibration system. This system works with an advanced color sensor that continuously measures the primary color levels of the entire wall, and adjusts white point and color when needed. This results in a significantly more accurate cube to cube uniformity, over the complete runtime. Furthermore, the module's robust structure makes the OverView MVL-6715 suitable for use in industrial environments.

Key characteristics

- 6x redundancy of LEDs (per color)
- 3rd generation LEDs for unmatched brightness & minimal power consumption
- Sense⁵ automatic white point and primary colors calibration, for brightness and color stability
- Active liquid cooling ensures longer LED lifetime
- Wide color gamut
- Less disposables, less waste
- 4:3 aspect ratio, 16:9 version becomes available during 2013

Product specifications

OVERVIEW MVL-6715

General specifications

Dimensions	<ul style="list-style-type: none">Diagonal: 67"Width: 1364 mm 53.7"Height: 1023 mm 40.3"Depth: 942 mm 37.1"
Weight	80.5 kg 177.5 lbs (projection module) and 21 kg 46.3 lbs (pedestal)
Resolution	1400x1050
On-screen contrast	1,200,000:1 (dynamic)
Screen	WV-FEL
Input voltage	90 – 240 V, 50-60Hz
Signal input/output	Dual link DVI in / Dual link DVI out
Pixel clock	320 MHz
Input frequency	24 -62 Hz
Genlock	49 -61 Hz
Third party interface	WEB service API (optional)
Display technology	DLP rear projection
Screen gap	< 1.5 mm 0.06" (@25°C) < 0.4 mm 0.015" (@30°C)
White point	6500k
Brightness	on-screen: 305 Cd/m ²
Brightness uniformity	>95%
Color stability	Self calibration with Sense ⁵ based on advanced color sensor
Light source	Light source 6x redundancy for each of 3 LEDs
Light source lifetime	> 60,000h (typ.) > 80,000h (eco) MTBF LED: > 500,000h
Power	150W (eco) 200W (typ.) 270W (max)
Conditions for operation	10°C-40°C, 80% humidity (nc)
Heat dissipation	510 BTU/h (eco) 680 BTU/h (typ.) 920 BTU/h (max)
Signal processing	Loop through Cropping / upscaling
Color gamut	EBU
Integration to third party equipment	WEB service API (optional)
Direct ethernet access	Built-in web server
Graphical user interface	All settings and operational parameters
Warranty	2 years

Last updated: 21 May 2026

© 2026 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.