


MNA-420 ENC ANA

HD AV-to-IP adapter for the OR and interventional suite

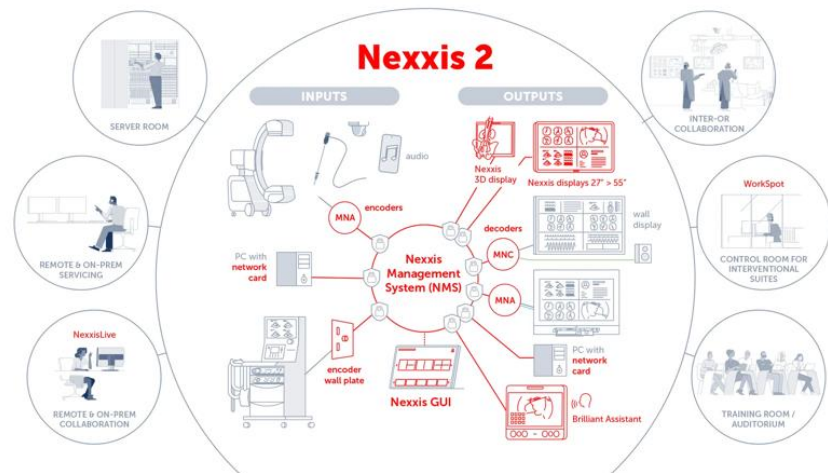

- AV-to-IP conversion
- Secure, scalable and flexible solution
- Established 3rd generation technology
- Near-zero latency for real-time decision making

The MNA-420 ENC ANA converts VGA & CVBS or VGA & S-Video video signals to Nexxis RAW IP packets. Other non-video signals such as audio and USB for keyboard/mouse are also supported. End-to-end video latency is amazingly low and is guaranteed not to exceed a single frame.

Capabilities

The MNA-420 adapters are part of Barco's Nexxis 2 solution, which provides users with uncompromised networked visualization for digital operating, endoscopy, and interventional rooms. The compact Nexxis 2 AV-to-IP adapters offer simplicity and flexibility while maintaining the highest possible performance standards and fitness for use in demanding medical environments.

As a third-generation device, the MNA-420 ENC ANA provides the full richness of the established Nexxis platform while:

- increasing future scalability
- improving ease of installation
- adding increased security performance
- reducing ecological footprint

Nexxis 2 is not available for distribution in certain markets, including the United States, where FDA 510(k) clearance is pending. Please contact your Barco representative to confirm availability in your region.

Product specificaties

MNA-420 ENC ANA

Algemene specificaties

Videoconversie	Converts analog video signals to uncompressed IP streams
Verwerking	One channel S-video/CVBS (720x576i50 or 720x485i60) + one channel analog graphical source (1920x1200p60 with reduced blanking)
Kleurdiepte	CVBS/S-Video: YCbCr 4:2:2 10 bit/color VGA: RGB24 8 bit/color & RGB30 10bit/color
Latentie	Subframe
Beveiliging	AES 128 encryption of all video, data & control signals
Encodersysteem	N/A
Video-uitvoer	N/A
Video-invoer	1x DIN + 1x DSUB-15 + 2x BNC
Netwerkuitgang	1x PAL/NTSC uncompressed IP stream + 1x HD uncompressed IP stream
IP-connectiviteit	1x 10GbE Fiber Optic Interface with SFP+ module
IP-standaarden	IPv4, IGMP, DHCP, sRTP, sRTCP, 802.1q, AES 128b, HTTP(s)
USB	1x micro-USB type B & 1x USB Type A
USB Power Output	Max. 5 V / 500 mA (2.5 W) per USB 2.0 Type-A port
Audio	Stereo line in 15mm length compatible 3.5mm TRRS jack Microphone in 15mm length compatible 3.5mm TRRS jack Stereo line out/Headset 15mm length compatible 3.5mm TRRS jack
Naleving	N/A
GPIO	2x GPI + 1x GPO via 15mm length compatible 3.5mm TRRS jack Camera trigger is possible via stereo line in (1x), microphone in (1x) and GPIO (2x) connector
Nexxis Integratie	Fully integrated in the NexxisOR 2.x solution, compatible with MNA-240 and MNA-4x0 devices
PSU	External 12Vdc Medical Approved PSU, 100-240VAC 50-60Hz 60W with lockable connector at DC side
Stroomverbruik	Maximum: 19,2 W Typical: 8,8 W
Grootte	35,8 mm H x 147,5 mm W x 167,4 mm D 1,4" H x 5,8" W x 6,6" D (+/-2 mm / 0.1")
Gewicht	MNA-420 ENC ANA unpacked has a weight equal to 540g
Temperatuur	5°C to 40°C (41°F to 104°F)
Vochtigheid	Maximum 85%
Hoogte	700 hPa
Opslagvoorwaarden	Storage temperature: -20°C to 60°C (-4°F to 140°F) Storage relative humidity: 10% to 93% Storage altitude: 500 hPa
Akoestisch geluidsniveau	Typical 20dBA at 20°C at 1m
Montage	Versatile mounting bracket included
Certificeringen	-CB (IEC 60601-1) -CB (IEC 62368-1) -cRU, RU (cRUus) -Demko -CE medical device class I -UKCA -BIS Registration, IS 13252 (part 1)
Normen	Medical Equipment: -IEC 60601-1:2005 + A1:2012 + A2:2020 -IEC 60601-1-6:2010 + A1:2013 + A2:2020 -IEC 60601-1-2:2014+A1:2020 (Ed.4.1) -AAMI ES 60601-1:2005 + A1:2012 + A2:2021 -CAN/CSA-C22.2 No.60601-1-08 + A1:14 (Reaffirmed 2022) -EN 60601-1:2006 + A1:2013 + A12:2014 + A2:2021 + A13:2024 -EN 60601-1-6:2010 + A1:2015 + A2:2021 -EN 60601-1-2:2015+A1:2021 (Ed.4.1) -FCC class B -ICES-001 Level B ITE Equipment: -IEC 62368-1:2018 -EN IEC 62368-1:2020 + A1:2020 -IS 13252 (Part1): 2010
Ondersteuning voor 3D-video	N/A
Streamback	N/A

Laatst bijgewerkt: 06 Aug 2026

© 2026 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer www.barco.com voor de nieuwste specificaties.

www.barco.com

BARCO