


Balder Cinemascope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

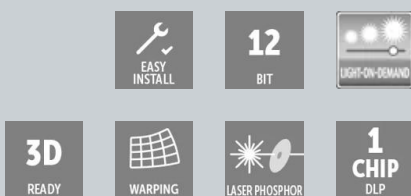

- Theater & Media Room Series
- 5K UHD Resolution (5,120 x 2,160)
- Laser Phosphor
- Up to 5,600 ANSI Lumens

Balder incorporates our unique PULSE electronics platform, inhouse designed laser engine and the world's finest optical components, fusing them together with the imaging device technology chosen by 9 out of 10 professional cinemas: DLP.

Professional grade optics

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own.

Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

State of the art electronics

Thanks to our unique single step processing technology (SSPTM), Pulse electronics are designed to process 4K UHD, HDMI™ 2.0a, HDCP 2.2 and HDR10 signals with extremely low latency.

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display flawless 5K UHD (5,120 × 2,160 px), 2.37:1 aspect ratio images on screen.

CinemaScope

Our unique aspect ratio detection system, automatically crops and scales content to fit the appropriate screen area, ranging from 1.78:1 to 2.39:1.

Manual cropping is also available for custom configurations such as cinemascope subtitle support, where only the top black bar is removed from none 1.78:1 content, preserving the subtitles at the foot of the image.

Liquid cooling

Balder has departed from a pure fan based cooling system, opting instead for a liquid cooling PID regulation system. This combined with our simulation grade warp engine allows Balder to operate at any angle (free rotation), offering new possibilities when it comes to architectural integration.

Технические характеристики**BALDER CINEMASCOPE****Общие технические характеристики**

Тип проектора	Single chip DLP
Срок службы источника света	20,000 - 60,000 hours Laser intensity dependent
CLO (постоянная светоотдача)	Yes
Оптический гаситель	Yes
Технологии	0.9" DMD™
Интегрированный веб-сервер	Yes
Разрешение	5,120 x 2,160 (5K UHD)
Диагностика	via Prospector web interface
Форматное соотношение	2.37:1 (CinemaScope)
Источник света	Laser phosphor
Светоотдача	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
Коэффициент контрастности	1,800:1 Sequential 450:1 ANSI
Равномерность яркости	>90%
Входное разрешение	From VGA up to 4K UHD (3,840 x 2,160) @ 60Hz or up to 2,560 x 1,600 @ 120Hz
Объективы	(R9802232) -EN68 (0.30:1) -Periscope Lens (requires vertical installation) (R9801832) -FLDX UST (0.41:1) -90°ns (R9802244) -EN67 (0.65:1) (R9802243) -EN66 (0.80 - 1.21:1) (R9802003) -EN76 (0.95 - 1.30:1) (R9802242) -EN63 (1.20 - 1.70:1) * (R9802241) -EN61 (1.70 - 2.50:1) * (R9801211) -EN44 (2.50 - 4.60:1) * Standard Lens Option(s)
Задержка	TBD
Оптический сдвиг объектива	Up to 122% vertical lens shift & up to 40% horizontal lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information Download Lens & Airflow Data Here
Цветокоррекция	P7 RealColor™
Потребление энергии в режиме ожидания	Standby ECO Mode: 110v -0.73W (with LAN Connection) 230v -0.82W (with LAN Connection)
Цветовая гамма	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
Обработка изображений	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
Ориентация	360° Rotation
Подключение к сети	10/100 Ethernet via RJ45 connection
Влажность воздуха при эксплуатации	20 to 80% (relative humidity)
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details
Входы	1 x HDMI™ 2.0 (HDCP 2.2) 1 x HDBaseT (HDCP 1.4 -9Gbps only) 2 x Dual Link DVI-D 2 x Display Port (1.2) 12G-SDI 1 x RJ45 Ethernet 1 x RS232 1 x Remote Control (RC) 3 x USB (2 x Rear, 1 x Front) DMX (1 x Input, 1 x Output)
Транспортные габариты	Excluding Lens 730 x 600 x 480 mm 28.7 x 23.7 x 18.9 in.
Управление	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant NOTE: 12v Trigger(s) do not follow standard functionality and require an IP command to enable / disable them. Download our integration guide for more information.

Технические характеристики**BALDER CINEMASCOPE**

Транспортный вес	Excluding Lens 43 kg / 94.8 lbs
Требования к питанию	100 -240V / 50 -60Hz
Стандартные аксессуары	Power Cord, Remote Control
Сертификаты	CE, FCC Class A and cCSAus
Потребляемая мощность	1,100 W -Max.
Уровень шума (типичный при 25 °C / 77 °F)	36 dB(A)
Круглосуточная эксплуатация	This projector is designed and warranted for heavy duty 24/7 operation. Specific measures and design considerations have been made in order for it to comply with stringent requirements in challenging applications.
Рабочая температура	10 to 45 °C at Sea Level Optimal Set Point: 20 °C
Влажность воздуха при эксплуатации	20 to 80% relative humidity
*	Firmware upgradable Please contact an authorized Barco representative for details
БТЕ в час	4,000 BTU/h -Max.
Требования к воздушному потоку	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear Clearance Requirements: Front: 1cm Left: 1cm Right: 50cm Rear: 100cm Top: 1cm
Поток отработанного воздуха	112 ft ³ /min @ 25 °C 190 m ³ /hour @ 25 °C Download Lens & Airflow Data Here
Размеры (ШхДхВ)	Excluding Lens 475 x 588 x 286 mm 18.7 x 23.1 x 11.3 in.
Вес	Excluding Lens 37 kg / 81.5 lbs
Гарантия	Limited 3 years parts and labor Extendable up to 5 years
Требования безопасности	This projector is Risk Group 2 (RG2) according to IEC EN 62471-5. This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 6.0 is installed. Refer to the installation manual for further information.

Создано: 19 May 2026

© 2026 Барко нв. Все права защищены. Полное или частичное воспроизведение без письменного разрешения запрещено. Все названия брендов и продуктов являются товарными знаками, зарегистрированными товарными знаками или торговыми наименованиями соответствующих владельцев. В связи с непрерывными обновлениями информация и технические характеристики могут меняться без предварительного уведомления. Пожалуйста, проверьте www.barco.com для получения последних спецификаций.

www.barco.com

