


# Balder Cinemascope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

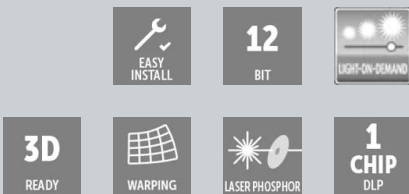

- Theater & Media Room Series
- 5K UHD Resolution (5,120 x 2,160)
- Laser Phosphor
- Up to 5,600 ANSI Lumens

Balder incorporates our unique PULSE electronics platform, inhouse designed laser engine and the world's finest optical components, fusing them together with the imaging device technology chosen by 9 out of 10 professional cinemas: DLP.

### Professional grade optics

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

By basing Balder Cinemascope's optical engine on its bigger brother Loki's Cinemascope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own.

Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

### State of the art electronics

Thanks to our unique single step processing technology (SSPTM), Pulse electronics are designed to process 4K UHD, HDMI™ 2.0a, HDCP 2.2 and HDR10 signals with extremely low latency.

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display flawless 5K UHD (5,120 x 2,160 px), 2.37:1 aspect ratio images on screen.

### **CinemaScope**

Our unique aspect ratio detection system, automatically crops and scales content to fit the appropriate screen area, ranging from 1.78:1 to 2.39:1.

Manual cropping is also available for custom configurations such as cinemascope subtitle support, where only the top black bar is removed from none 1.78:1 content, preserving the subtitles at the foot of the image.

### **Liquid cooling**

Balder has departed from a pure fan based cooling system, opting instead for a liquid cooling PID regulation system. This combined with our simulation grade warp engine allows Balder to operate at any angle (free rotation), offering new possibilities when it comes to architectural integration.

## Specifiche tecniche

## BALDER CINEMASCOPE

### Specifiche generali

Tipo proiettore	Single chip DLP
Durata della sorgente luminosa	20,000 - 60,000 hours Laser intensity dependent
CLO (emissione luminosa costante)	Yes
Schermo paraluce ottico	Yes
Tecnologia	0.9" DMD™
Server web integrato	Yes
Risoluzione	5,120 x 2,160 (5K UHD)
Diagnostica	via Prospector web interface
Rapporto di aspetto	2.37:1 (CinemaScope)
Fonte di luce	Laser phosphor
Potenza luminosa	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
Rapporto di contrasto	1,800:1 Sequential 450:1 ANSI
Uniformità della luminosità	>90%
Risoluzioni di input	From VGA up to 4K UHD (3,840 x 2,160) @ 60Hz or up to 2,560 x 1,600 @ 120Hz
Gamma delle lenti	(R9802232) -EN68 (0.30:1) -Periscope Lens (requires vertical installation) (R9801832) -FLDX UST (0.41:1) -90°ns (R9802244) -EN67 (0.65:1) (R9802243) -EN66 (0.80 - 1.21:1) (R9802003) -EN76 (0.95 - 1.30:1) (R9802242) -EN63 (1.20 - 1.70:1) * (R9802241) -EN61 (1.70 - 2.50:1) * (R9801211) -EN44 (2.50 - 4.60:1)  * Standard Lens Option(s)
Latenza	TBD
Spostamento ottico dell'obiettivo	Up to 122% vertical lens shift & up to 40% horizontal lens shift (depending on lens selection)  Visit the Barco Residential Lens Calculator for further information Download Lens & Airflow Data Here
Correzione del colore	P7 RealColor™
Potenza di standby	Standby ECO Mode: 110v -0.73W (with LAN Connection) 230v -0.82W (with LAN Connection)
Gamut di colore	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
Elaborazione delle immagini	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
Orientamento	360° Rotation
Connessione di rete	10/100 Ethernet via RJ45 connection
Umidità operativa	20 to 80% (relative humidity)
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details
Ingressi	1 x HDMI™ 2.0 (HDCP 2.2) 1 x HDBaseT (HDCP 1.4 -9Gbps only) 2 x Dual Link DVI-D 2 x Display Port (1.2) 12G-SDI 1 x RJ45 Ethernet 1 x RS232 1 x Remote Control (RC) 3 x USB (2 x Rear, 1 x Front) DMX (1 x Input, 1 x Output)
Dimensioni di spedizione	Excluding Lens 730 x 600 x 480 mm 28.7 x 23.7 x 18.9 in.
Controllo	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant  NOTE: 12v Trigger(s) do not follow standard functionality and require an IP command to enable / disable them. Download our integration guide for more information.
Peso con imballo	Excluding Lens 43 kg / 94.8 lbs

**Specifiche tecniche****BALDER CINEMASCOPE**

Requisiti di potenza	100 -240V / 50 -60Hz
Accessori standard	Power Cord, Remote Control
Certificazioni	CE, FCC Class A and cCSAus
Consumo energetico	1,100 W -Max.
Livello di rumore (tipico a 25°C/77°F)	36 dB(A)
Funzionamento 24 ore su 24, 7 giorni su 7	This projector is designed and warranted for heavy duty 24/7 operation. Specific measures and design considerations have been made in order for it to comply with stringent requirements in challenging applications.
Temperatura di esercizio	10 to 45 °C at Sea Level Optimal Set Point: 20 °C
Umidità di esercizio	20 to 80% relative humidity
*	Firmware upgradable Please contact an authorized Barco representative for details
BTU/ora	4,000 BTU/h -Max.
Requisiti di flusso d'aria	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear  Clearance Requirements: Front: 1cm Left: 1cm Right: 50cm Rear: 100cm Top: 1cm
Flusso d'aria di scarico	112 ft <sup>3</sup> /min @ 25 °C 190 m <sup>3</sup> /hour @ 25 °C <a href="#">Download Lens &amp; Airflow Data Here</a>
Dimensioni (P x L x A)	Excluding Lens 475 x 588 x 286 mm 18.7 x 23.1 x 11.3 in.
Peso	Excluding Lens 37 kg / 81.5 lbs
Garanzia	Limited 3 years parts and labor Extendable up to 5 years
Requisiti di sicurezza	This projector is Risk Group 2 (RG2) according to IEC EN 62471-5. This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 6.0 is installed. Refer to the installation manual for further information.

Generato il: 19 May 2026

© 2026 Barco nv. Tutti i diritti riservati. La riproduzione totale o parziale è proibita in assenza di autorizzazione scritta. Tutti i nomi di marchi e di prodotti sono marchi, marchi registrati o nomi commerciali dei rispettivi proprietari. A causa delle continue innovazioni, le informazioni e le specifiche tecniche sono soggette a modifiche senza preavviso. Controlla [www.barco.com](http://www.barco.com) per le specifiche più recenti.