


Thor+

The hammerwielding god of lightning, brings 6P RGB laser projection to the most exclusive homes for the first time.

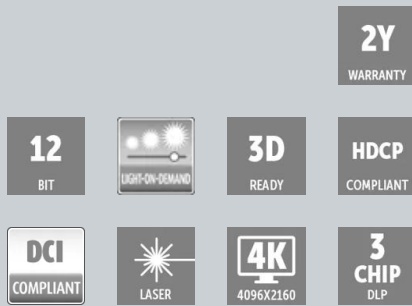

- Cinema at Home Series
- Native 4K Resolution (4,096 x 2,160)
- 6P RGB Laser
- Up to 32,000 ANSI Lumens

The Thor platform represents the pinnacle of Barco Residential's projection portfolio.

Thor's perfectly designed, 6P RGB laser technology, 32,000 lumen output and hermetically sealed 4K DLP® engine, delivers reality altering levels of immersion for the largest home theatres.

World's most powerful residential projector

Thor+ is the world's most powerful residential projector with integrated laser 6P RGB laser, 4K 3D projection solution for Cinema at Home. In order to reliably achieve long lifetime at brightness levels twice that of xenon projectors, a sophisticated control system actively cools both laser modules and the DMD engine, providing a predictable 30,000 hour lifetime with at least 80% of the initial brightness.

Laser speckle

Thanks to Barco's industry-leading technology to minimize laser speckle, Thor+ is able to provide superior 2D and 3D images on both white and silver screens.

Color convergence mechanism

Thor+ also features our unique and highly acclaimed analog color convergence mechanism. By allowing the green and red DMD chips to be manually adjusted, perfect convergence can be achieved. This attention to detail renders images sharper and more immersive than ever before.

Hand built

Not every projector can claim to be handbuilt, Thor can. Even though we are using state-of-the-art technologies for most processes – such as measuring, calibrating, assembling our electronics, and manufacturing the delicate optics and mechanics – every single step of the process is overseen by specifically trained professionals. Moreover, the assembly of vital parts is performed by hand, guaranteeing ultimate quality at all stages of manufacture.

Technische Daten

THOR+

Allgemeine technische Daten	
Projektortyp	Three chip DLP
Technologie	3 x 1.38" DMD™
Auflösung	4,096 x 2,160 (4K)
Bildseitenverhältnis	1.89:1
Lichtquelle	6P RGB Laser
Lebensdauer der Lichtquelle	30,000 Hours or more Replaceable illumination
Lichtausgabe	Up to 32,000 ANSI lumens
CLO (Constant Light Output -Konstante Lichtausgabe)	Yes
Kontrast	6,000:1 Sequential 1,100:1 ANSI w/High Contrast Lens
Helligkeitsgleichförmigkeit	80% at sides 75% at corners
Objektivbereich	(R98013983) -4K-VHC HDR (1.13 - 1.72:1) * (R98013333) -4K-VHC HDR (1.35 - 1.84:1) * (R98013343) -4K-VHC HDR (1.45 - 2.10:1) * (R98013533) -4K-VHC HDR (1.65 - 2.70:1) * (R98013543) -4K-VHC HDR (1.98 - 3.40:1) * (R98562942) -DC4K HC (1.35 - 1.86:1) (R98562972) -DC4K HC (1.46 - 2.10:1) (R98563002) -DC4K HC (1.65 - 2.60:1) (R98563032) -DC4K HC (2.00 - 3.35:1) * Standard Lens Option(s)
Linseinstellung	Up to 25% vertical lens shift & up to 15% horizontal lens shift Motorized zoom, focus, shutter and lens shift Download Lens Data Here
Neigung	20° Forwards 5° Backwards
Optischer Dowser	Yes
Farbkorrektur	P7
Farbskala	REC2020
Bildverarbeitung	Alchemy - Integrated Cinema Media Processor (ICMP)
WARP	N/A
Ausrichtung	Pedestal / Table Top
Netzwerk-Verbindung	10/100 Ethernet via RJ45 connection
Softwarewerkzeuge	Barco Communicator
Integrierter Webserver	No
HDR	HDR10
3D	Color3D (Barco Laser3D): Native 6-primary color-3D system. Only requires color filter glasses (Dolby3D glasses cannot be reused) Active glasses systems Polarization recuperation systems
Eingänge	Barco Alchemy ICMP included in the projector: 2 x HDMI2.0a (up to 4K 2D 60fps) 2 x 3G-SDI inputs 16 x AES/EBU audio channels (2 x RJ45) 8 x GPI, 8 x GPO (4 x RJ45) 2 x Gbe for content connectivity & ingest 2 x front-accessible USB 3.0 for fast ingest 2 x front-accessible USB 2.0 DCI 4K 2D up to 60fps* DCI 4K 3D (24 or 30fps per eye)* DCI High Frame Rates 2K 3D up to 120fps (60fps per eye) JPEG 2000 bit-rates up to 625 Mbps MPEG-2 (4:2:0 and 4:2:2 up to 60fps)
Eingangsaufösungen	VGA up to 4K (4,096 x 2,160) @ 120Hz
DCI	DCI Compliant
Integrierter Speicher	3.9TB effective storage (RAID-5) via 3 x 2TB Hot-swappable 2.5" hard-drives
Bedienung	RS232, TCP/IP, 8 x GPIO
Stromversorgungsanforderungen	Projector: Y connection: 200-240V / 346-415V 50-60Hz 16A 3W+N+PE Power cord size range: 4 sq mm to 6 sq mm, 10AWG to 8AWG Circuit breaker range: 25A to 40A Delta connection: 200-240V 3W+PE 28A 50-60Hz Power cord size: 6 sq mm, 8AWG Circuit breaker: 40A Chillers (each): Y connection: 230/400V 3W+N+PE 16A 2.5 sq mm Delta connection: 208V / 3W+PE Max. 16A per phase

Technische Daten

THOR+

Stromverbrauch	Projector (Full Laser Power): 6.7 kW (2D or Polarization 3D) 3.6 kW (Barco Laser3D - 6P) Chillers (each) (Full Laser Power): 3.0 kW (2D or Polarization 3D) 2.5 kW (Barco Laser3D - 6P)
Geräuschentwicklung (typisch bei 25 °C/77 °F)	Projector (w/Chillers): 77dB(A) - Max fan speed (start up phase) 57dB(A) - Stable state Projector (w/o Chillers): 52db(A)
Betriebstemperatur	10 to 30 °C Max. (sea Level)
Betriebsfeuchtigkeit	75% Max. (projector and chillers)
BTU pro Stunde	32,150 BTU/h
Anforderungen Luftstrom	Air Inlet (from Rear w/Feet Down): TBC Exhaust (from Rear w/Feet Down): TBC
Abgasstrom	TDB
Abmessungen (BxTxH)	Projector: 742 x 1,446* x 706 mm (includes feet / excludes lens) 29.2 x 56.9 x 27.8 in. (includes feet / excludes lens) Chillers (each): 701 x 701 x 800 mm 27.6 x 27.6 x 31.5 in. * Excludes allowance for chiller hoses
Gewicht	Projector: 235 kg / ~520lbs (excludes lens) 2 x Chillers (each): ~115 kg / ~250 lbs
Verpackungs-Abmessungen	TBC (excludes lens - packaged separately)
Versandgewicht	TBC (excludes lens - packaged separately)
Standardzubehör	TBC
Zertifizierungen	CE; ETL/UL/FCC, CCC
Gewährleistung	Limited 3 years parts and labor Extendable up to 5 years
Sicherheitsanforderungen	Class 1, Risk Group 3
*	Firmware upgradable Please contact an authorized Barco representative for details

Generiert am: 22 Jun 2023

Die angegebenen Informationen und Daten sind typisch für das beschriebene Gerät. Jede Spezifikation kann sich aber ohne vorherige Ankündigung ändern. Die aktuelle Version dieser Broschüre finden Sie unter www.barco.com.