
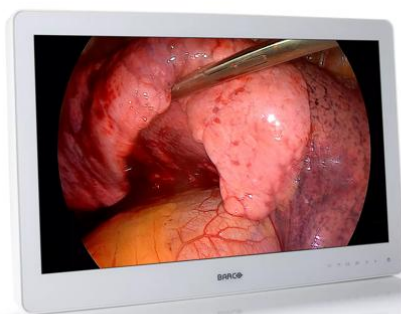


# MDSC-2326 High Bright

Full HD high-bright surgical display

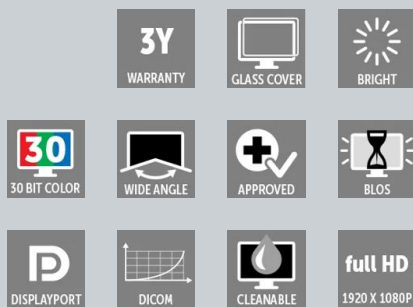

- For the best hand-eye coordination
- Allows for easy cleaning and disinfection
- Works with Nexxis for video-over-IP integration

Barco's MDSC-2326 High Bright is a 26-inch, near-patient surgical display with LED backlight. In addition to the renowned image quality performance of MDSC-2226, the new model offers very high brightness for improved visualization under all ambient conditions. The new scratch-resistant, high quality optical glass offers durable protection throughout the display's lifetime.

## Ease of mind

Calibrated, artifact-free images

The display's high brightness, high contrast and calibrated colors provide surgeons with excellent depth perception and the most accurate images from FHD endoscopy camera systems.

Multi-source, multi-display imaging

With its broad input connectivity, the MDSC-2326 offers flexible multi-modality imaging (PiP & PaP) in new integrated operating rooms. Featuring an integrated Barco Nexxis decoder (optional) it offers the most convenient visualization solution for uncompressed video-over-IP without delay.

Safety, stability and redundancy

Thanks to its high-bright LED backlight with light output stabilization, the display ensures lifetime-long performances and image consistency. It also offers a unique, automated failover feature so a backup signal is always available to ensure safe surgery

## Ease of installation

The MDSC-2326 comes with a smart cable management system that hides the

The MDSC-2326 comes with a smart cable management system that hides the cables for a clutter-free set-up. Its lightweight design allows easy mounting on surgical booms and spring arms.

### **Ease of use**

Barco's MDSC-2326 allows for easy cleaning and disinfection thanks to its smooth surface, splash-proof housing (front protection level IP45). It comes with a highly durable, scratch-resistant front glass featuring excellent optical performance.

Barco's MDSC-2326 features:

- 26" wide-screen LCD
- Full HD resolution (1,920 x 1,080)
- High-bright LED backlight with output stabilization
- Wide viewing angle thanks to IPS-Pro LCD technology
- Artifact-free images
- Calibrated, consistent colors and grayscales
- Easy-clean design with sealed front (IP45)
- Smart cable management system

## Product specifications

## MDSC-2326 HIGH BRIGHT

### General specifications

Screen technology	TFT AM LCD / IPS-PRO technology / LED backlight
Active screen size (diagonal)	661 mm (26")
Active screen size (H x V)	576 x 324 mm (22.7" x 12.8")
Aspect ratio	16:9
Resolution	2MP (1920 x 1080)
Pixel pitch	0.3 mm
Color support	1,073 million (10 bit)
Viewing angle	178° Hor / 178° Ver
Maximum luminance	Max: 900 cd/m <sup>2</sup> (typ.) @6500K : 600 cd/m <sup>2</sup> stabilized(typ.) X-ray setting: 750 cd/m <sup>2</sup> stabilized(typ.)
Contrast ratio	1400:1 (Typ.)
Response time	T on + T off = 18 msec (typ.)
White point	Calibrated: 5600K, 6500K, 7600K, 9300K
Gamma curve	Native, 1.8, 2.0, 2.2, 2.4, DICOM
Front protection screen	2-side, scratch-resistant AR alkali-aluminosilicate glass
Keyboard	Capacitive 7-key touch Keyboard
Video inputs	MDSC-2326 DDIH  DVI-I (Digital & Analog – HDMI support) DVI-D 2x 3G-SDI(2x BNC) DisplayPort 1.1a Component Video RGBS / YPbPr (4xBNC) S-video (4-pin Mini DIN) Composite video / SOG (1xBNC)  MDSC-2326 MNAH  Same as MDSC-2326 DDIH + 1x Fiber Optic SFP+ (for uncompressed video over IP)
Video outputs	DVI-D (output selectable from DVI-1, DVI-2, Nexxis) S-video (4-pin Mini DIN) Composite video (1x BNC) 2x 3G-SDI (2x BNC)
Features	Picture-in-Picture, Failover mode
Remote control	RS-232 (D-sub 9-pin)
Power requirements (nominal)	MDSC-2326 DDIH: 85W / 24V ± 10% MDSC-2326 MNAH: 110W / 24V ± 10%
External power supply	AC input: 100 – 240 VAC / 47-63 Hz auto-switch DC output: +24 VDC / 6 A
Dimensions w/o stand (W x H x D)	640 x 419 x 87 mm (25.2 x 16.5 x 3.4")
Net weight w/o stand	9.4 kg / 20.7 lbs (MDSC-2326 DDIH) 9.8 kg / 21.6 lbs (MDSC-2326 MNAH)
Net weight packaged w/o stand	12.5 Kg / 27.6 lbs (MDSC-2326 DDIH) 12.9 Kg / 28.4 lbs (MDSC-2326 MNAH)
Mounting standard	100 x 100 mm VESA
Temperature	Operating: 0° -35° C Storage: -20° -50° C
Humidity	Operating: 10% – 85% R.H. Storage: 5% – 85% R.H.
Regulation Compliance	IEC60601 3rd Edition Approvals/Marking: CE, C-UL-US, DEMKO, CCC, INMETRO, EAC Safety (Medical equipment): IEC60601-1, UL60601-1, CAN/CSA C22.2 No. 60601-1-08 Electromagnetic compatibility: EMC Medical EMC standards: IEC60601-1-2, EN55011 /CISPR 11, FCC CFR47 part 15 & 18/Class B (MDSC-2326 DDI), Class A (MDSC-2326 MNA) Green requirements: ROHS2, REACH, WEEE compliant
Protection rating	IP21 (IP45 front side)
Warranty	3 years
Green compliance	ROHS-2, REACH, WEEE

Last updated: 08 Jul 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.