


MDSC-8231 12G

4K UHD surgical display

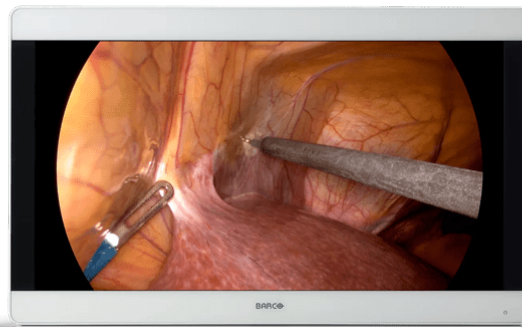

- Perfect match for 4K endoscopy cameras
- Shows images with astonishing detail
- Medical-grade and smart design
- BT.2020 compatible
- 12G-SDI and Quad-link 3G-SDI signals accepted

Barco's MDSC-8231 is a 31-inch, near-patient, high-brightness surgical display that is purpose-built for 4K imaging in the digital operating room and interventional radiology control room. It offers an easy-to-clean design, light and smart mechanics, and the most life-like images today.

Ease of mind

Flawless 4K imagingThe perfect match for 4K endoscopy camera systems, the MDSC-8231 presents endoscopic images with a resolution four times that of HD. This provides surgeons with more detail-rich, color-correct images for a real-life presentation of the patient's anatomy and excellent depth perception. Images are presented with unrivaled color accuracy (thanks to the wide color gamut and advanced color calibration), without artifacts, and with near-zero latency for optimal hand-eye coordination. The 31-inch display size makes the MDSC-8231 ideal for use in the interventional radiology control room as well.

Multi-source, multi-display imagingWith its broad input connectivity and wide set of image control features, the MDSC-8231 offers flexible multi-modality imaging in new integrated operating rooms. The 31-inch display also offers integrated functionality (optional) for use with Barco's Nexxis for video-over-IP solutions.

Safety, stability and redundancyThanks to its high-bright LED backlight with light output stabilization, the display ensures a long lifetime and image consistency. The unique, automated failover feature guarantees a backup signal at all times to ensure safe surgery.

Ease of installation

The MDSC-8231 comes with a smart cable management system that hides the

The MDSC-8231 comes with a smart cable management system that hides the cables for a clutter-free set-up. Its lightweight design allows easy mounting on surgical booms and spring arms.

Ease of use

Barco's MDSC-8231 allows for easy cleaning and disinfection thanks to its smooth surface and splash-proof housing (front protection level IP45). It comes with a highly durable, scratch-resistant front glass featuring excellent optical performance.

Notice:

Displays covered under custom development or sold via partner contracts are managed separately. Lifetime milestones, dates, and product part numbers for these may differ from the above. Please contact your Barco Account Manager for more information.

Product specificaties**MDSC-8231 12G****Algemene specificaties**

Schermt technologie	TFT AM LCD / IPS-PRO technologie / LED backlight
Actieve schermgrootte LCD-paneel (diagonaal)	789 mm (31.1")
Actieve schermgrootte LCD-paneel (H x V)	698 x 368 mm
Beeldverhouding LCD-paneel (H:V)	17:9
Resolutie LCD-paneel	4K-2K (4096 x 2160)
Pixelpitch	0.1704 mm
Kleurondersteuning	1073 million (10-bit)
Kleurengamma	Native: 96% DCI-P3 / 105% Adobe
Kijkhoek (H, V)	178° Hor / 178° Ver
Luminantie	Max 550 cd/m ² (typ.) @6500K; 450 cd/m ² stabilized (typ.)
Contrastverhouding	1400:1 (typ.)
LCD-responstijd (CR10)	T on + T off (=rise + fall): 20 ms (typ.)
Witpunt	Calibrated: 5600K, 6500K, 7600K, 9300K
Gamma	Native, 1.8, Video 2.2, 2.4, DICOM
Schermbescherming	Scratch-resistant 2-side AR alkali-aluminosilicate glass
Toetsenbord	Capacitive 7-key touch keyboard
Video-ingangssignalen	4K-UHD input selectable among: Quad-link 3G-SDI up to 4096 x 2160 @50Hz/60Hz 12G-SDI up to 4096 x 2160 @50Hz/60Hz 1x DP 1.1 up to 4096 x 2160 @25Hz/30Hz 2x DP 1.1 up to 2048 x 2160 @50Hz/60Hz 1x DP 1.2 MST up to 4096 x 2160 @50Hz/60Hz 2x HDMI 2.0 up to 4096 x 2160 @50Hz/60Hz FHD input (upscaled to UHD): 1x DVI
Video-uitgangssignalen	2x 12G-SDI (input loop through) 1x DVI (screen clone downscaled to FHD)
Remote control	Usb Type B port for FW download & control protocol / remote control through DDC on DVI & DP
Stroomverbruik (max.)	190W (Max) / 24V ± 10% Low power mode
Externe voeding	AC input: 100 – 240 VAC / 47-63 Hz auto-switch DC output: +24 VDC / 10 A
Dimensions packaged (W x H x D)	964 x 580 x 180 mm / 37.9 x 22.8 x 7.1 in
Nettogewicht beeldscherm	12.1 Kg / 26.6 lbs
Nettogewicht verpakt	17 Kg / 37.5 lbs
Montage standaard	100x100 & 200x100 mm VESA
Certificeringen	• ANSI/AAMI ES60601-1 (2005 + C1:09 + A2:10 + A1:2014 • CAN/CSA-C22.2 No. 60601-1 (2014) • IEC 60601-1:2005 (Third Edition) + CORR. 1:2006 + CORR. 2:2007 + A1:2012 • EN 60601-1: 2006 + CORR:2010 + A1:2013 + A12:2014 • Electromagnetic Compatibility: EMC Medical EMC Standards: IEC 60601-1-2 (2014), EN 60601-1-2 (2015) EN55011 / CISPR 11, FCC CFR47 Part 15 Subpart B (Class B) • GB17625.1-2012; GB4943.1-2011; GB/T9254-2008 • Approvals/Marking: CE, c-UL-us, DEMKO, CCC, INMETRO, EAC Green compliance: ROHS-3, REACH, WEEE
Protection rating	IP20 (IP45 front side only)
Bedrijfstemperatuur	0° ÷ 35° C
Opslagtemperatuur	-20° ÷ 60° C
Luchtvochtigheid bedrijf	10% ÷ 90% R.H
Luchtvochtigheid opslag	5% ÷ 90% R.H.
Warranty	3 years

Laatst bijgewerkt: 17 Oct 2024

© 2024 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer www.barco.com voor de nieuwste specificaties.