


Balder CinemaScope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

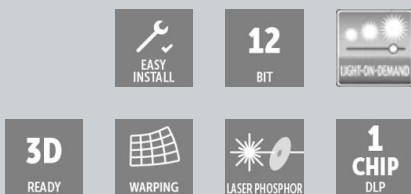

- Theater & Media Room Series
- 5K UHD Resolution (5,120 x 2,160)
- Laser Phosphor
- Up to 5,600 ANSI Lumens

Balder incorporates our unique PULSE electronics platform, inhouse designed laser engine and the world's finest optical components, fusing them together with the imaging device technology chosen by 9 out of 10 professional cinemas: DLP.

Professional grade optics

By basing Balder CinemaScope's optical engine on its bigger brother Loki's CinemaScope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

By basing Balder CinemaScope's optical engine on its bigger brother Loki's CinemaScope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own.

Topping that, Balder's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

State of the art electronics

Thanks to our unique single step processing technology (SSPTM), Pulse electronics are designed to process 4K UHD, HDMI™ 2.0a, HDCP 2.2 and HDR10 signals with extremely low latency.

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display

Balder CinemaScope uses the very latest 0.9" DMD DLP chipset, to display flawless 5K UHD (5,120 × 2,160 px), 2.37:1 aspect ratio images on screen.

CinemaScope

Our unique aspect ratio detection system, automatically crops and scales content to fit the appropriate screen area, ranging from 1.78:1 to 2.39:1.

Manual cropping is also available for custom configurations such as cinemascope subtitle support, where only the top black bar is removed from none 1.78:1 content, preserving the subtitles at the foot of the image.

Liquid cooling

Balder has departed from a pure fan based cooling system, opting instead for a liquid cooling PID regulation system. This combined with our simulation grade warp engine allows Balder to operate at any angle (free rotation), offering new possibilities when it comes to architectural integration.

Технические характеристики**BALDER CINEMASCOPE**

Общие характеристики	
Тип проектора	Single chip DLP
Технология	0.9" DMD™
Разрешение	5,120 x 2,160 (5K UHD)
Форматное соотношение	2.37:1 (CinemaScope)
Источник света	Laser phosphor
Срок эксплуатации ЖКИ	20,000 - 60,000 hours Laser intensity dependent
Светоотдача	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
CLO (постоянная светоотдача)	Yes
Уровень контрастности	1,800:1 Sequential 450:1 ANSI
Однородность яркости	>90%
Диапазон объективов	(R9802232) -EN68 (0.30:1) -Periscope Lens (requires vertical installation) (R9801832) -FLDX UST (0.41:1) -90°ns (R9802244) -EN67 (0.65:1) (R9802243) -EN66 (0.80 - 1.21:1) (R9802003) -EN76 (0.95 - 1.30:1) (R9802242) -EN63 (1.20 - 1.70:1) * (R9802241) -EN61 (1.70 - 2.50:1) * (R9801211) -EN44 (2.50 - 4.60:1) * Standard Lens Option(s)
Сдвиг оптической линзы	Up to 122% vertical lens shift & up to 40% horizontal lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information Download Lens & Airflow Data Here
Оптический затемнитель	Yes
Коррекция цвета	P7 RealColor™
Цветовая гамма	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
Обработка изображений	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
Ориентация	360° Rotation
Соединение сети	10/100 Ethernet via RJ45 connection
Встроенный веб-сервер	Yes
Диагностика	via Prospector web interface
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details
Входы	1 x HDMI™ 2.0 (HDCP 2.2) 1 x HDBaseT (HDCP 1.4 -9Gbps only) 2 x Dual Link DVI-D 2 x Display Port (1.2) 12G-SDI 1 x RJ45 Ethernet 1 x RS232 1 x Remote Control (RC) 3 x USB (2 x Rear, 1 x Front) DMX (1 x Input, 1 x Output)
Разрешения входного сигнала	From VGA up to 4K UHD (3,840 x 2,160) @ 60Hz or up to 2,560 x 1,600 @ 120Hz
Задержка	TBD
Контроль	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant NOTE: 12v Trigger(s) do not follow standard functionality and require an IP command to enable / disable them. Download our integration guide for more information.
Требования к источнику питания	100 -240V / 50 -60Hz
Энергопотребление	1,100 W -Max.
Потребляемая мощность в режиме ожидания	Standby ECO Mode: 110v -0.73W (with LAN Connection) 230v -0.82W (with LAN Connection)
БТЕ/ч	4,000 BTU/h -Max.

Технические характеристики**BALDER CINEMASCOPE**

Уровень шума (номинал при 25 °C / 77 °F)	36 dB(A)
Рабочая температура	10 to 45 °C at Sea Level Optimal Set Point: 20 °C
Влажность при эксплуатации	20 to 80% (relative humidity)
Требования к воздушному потоку	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear Clearance Requirements: Front: 1cm Left: 1cm Right: 50cm Rear: 100cm Top: 1cm
Поток отсасываемого воздуха	112 ft ³ /min @ 25 °C 190 m ³ /hour @ 25 °C Download Lens & Airflow Data Here
Габариты (WxLxH)	Excluding Lens 475 x 588 x 286 mm 18.7 x 23.1 x 11.3 in.
Вес	Excluding Lens 37 kg / 81.5 lbs
Транспортировочные габариты	Excluding Lens 730 x 600 x 480 mm 28.7 x 23.7 x 18.9 in.
Shipping weight	Excluding Lens 43 kg / 94.8 lbs
Стандартные аксессуары	Power Cord, Remote Control
Сертификаты	CE, FCC Class A and cCSAus
Требования к безопасности	This projector is Risk Group 2 (RG2) according to IEC EN 62471-5. This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 6.0 is installed. Refer to the installation manual for further information.
24/7 operation	This projector is designed and warranted for heavy duty 24/7 operation. Specific measures and design considerations have been made in order for it to comply with stringent requirements in challenging applications.
Гарантия	Limited 3 years parts and labor Extendable up to 5 years
*	Firmware upgradable Please contact an authorized Barco representative for details

Создано: 09 Jul 2024

© 2024 Барко нв. Все права защищены. Полное или частичное воспроизведение без письменного разрешения запрещено. Все названия брендов и продуктов являются товарными знаками, зарегистрированными товарными знаками или торговыми наименованиями соответствующих владельцев. В связи с непрерывными обновлениями информация и технические характеристики могут меняться без предварительного уведомления. Пожалуйста, проверьте www.barco.com для получения последних спецификаций.

www.barco.com

