


NGC-110

10-slot chassis

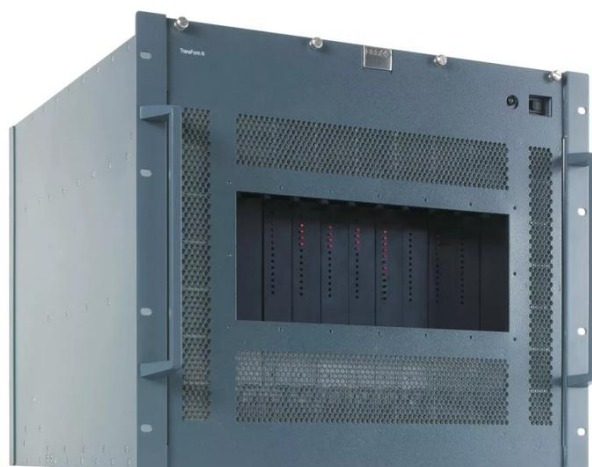

Product specifications

NGC-110

General specifications

- General specifications
 - 19" rackmount housing: 9RU
 - Dimensions (LxWxH): 508,3 mm | 20" (without handles) x 481,3 mm | 18.9" x 399,2 mm | 15.7" [9U height]
 - Weight: approx. 40kg without boards. Approx. 1.5kg / board.
 - Hot swappable: All active components
 - Noise level: 63 DBA at full load

Power and environmental specifications

- Power and environmental specifications
 - Input power:
 - With non-redundant power supply: 2 x 650 W
 - With redundant power supply: 4 x 650 W
 - Input voltage range: 85-264VAC
 - Input frequency: 47-63Hz
 - Inrush current:
 - With non-redundant power supply: 2 x 30A
 - With redundant power supply: 4 x 30A (max)
 - Class B EMI input filter
 - PCF: 0.99 (power factor corrected)
 - Efficiency: 75-85% at full load

Environmental specifications

- Environmental specifications
 - Heat dissipation 4500 BTU/h
 - Temperature/humidity 0°C to 40°C (32 - 104°F) at max. 80% humidity (non condensing)

Shelf management

- Shelf management
 - Option with shelf management module inserted
 - Active fan speed regulation
 - System health monitoring
 - SNMP agent
 - Browser based access to system statistics

MTBF

- MTBF
 - 200,000 hours

Safety Regulations

- Safety Regulations
 - CE and UL certified

Last updated: 08 Jul 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.