


# OverView OLF-710

Fully redundant 70" WXGA 16:9 LED video wall with front access

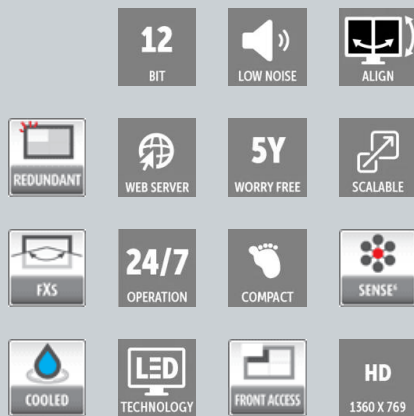

Barco's OverView OLF series LED-lit video walls are the first choice for 16:9 mission-critical control rooms that require a guaranteed uptime, and are limited in space. The modules' high level of redundancy, not only of the individual LEDs, but also of the LEDs' power supplies and even inputs, ensures nothing can go wrong, giving users the peace of mind they need. Front access eliminates the need for a rear maintenance area, for control rooms where space is a critical issue. Featuring a structure that can be tailored to the requirements of the customer, the OverView OLF series knows virtually no limits in size.

## Ultimate peace of mind

The OverView OLF-710 video wall modules have been designed for an entirely maintenance-free operation over several years, without any need for consumables. Barco's unique liquid cooling system ensures lower LED temperature, resulting in longer LED lifetime (>80,000 hours in eco mode). Displaying the sharpest and most saturated colors in WXGA resolution (1368x768), the OverView OLF-710 offers an ergonomically excellent viewing experience. The availability of alternative screen types makes sure you can adjust the video wall to your specific needs in terms of viewing angle and brightness.

## Always the most optimal picture

OverView OLF series video walls come with Sense<sup>6</sup>, Barco's unique sensor technology that provides brightness and color stability over time and across the entire display. Sense<sup>6</sup> continuously measures brightness and color by means of a high-quality spectrometer, and adjusts the color space to provide an image that is most convenient for the human eye. This means that no maintenance or manual adjustments are needed. The colors can also be adjusted to the very specific needs of TV cameras, making the OverView OLF series suitable for backdrop applications.

### **Award-winning design**

The OverView OLF series' design, combining usability with style, has been lauded with the prestigious Red Dot Design Award. The individual modules have the smallest depth on the market today, allowing to build the most shallow video walls possible. Combined with the front access, this makes the OverView OLF series the product of choice for installation in confined spaces.

### **Highest level of redundancy**

- 6x redundancy of LEDs (per color) & LED power supplies
- 2x redundancy of dual-link inputs

### **Unique Barco innovations**

- Sense<sup>6</sup> automatic full spectrum calibration
- Active liquid cooling
- Front access, removing need for rear maintenance area

### **Excellent viewing ergonomics**

- Wide LED color gamut
- WXGA resolution
- No color break up
- Excellent off-axis viewing with next-generation screen types

### **Maintenance-free**

- 80,000 hours LED lifetime in eco mode
- 5 years service-free runtime
- No color wheel needed

### **Green focus**

- No wearing parts, no waste
- No mercury lamps needed

**Product specificaties****OVERVIEW OLF-710****General specifications**

Resolutie	HD ready (1368x768 pixels)
Helderheid	On-screen: 235 Cd/m <sup>2</sup>
Contrast op scherm	560,000:1
Kleur	Up to 165% EBU (at maximum color mode)
Weergavetechnologie	Rear projection DLP
Wit punt	2,300K   6,500K   9,300K   arbitrary
Helderheidsuniformiteit	95% ANSI 9
Schermb	FXS, with H/V 35°/33° ( +/-2°) half gain angle
Ruimte tussen schermen	Hor: 2.3 mm   0.09", Vert: 1.6 mm   0.07" (@ 25°C)
Kleurstabiliteit	Self calibration with spectrometer based Sense <sup>6</sup>
Afmetingen	<ul style="list-style-type: none"><li>• Diagonal: 70" (Approx.)</li><li>• Width: 1,550 mm   61"</li><li>• Height: 872 mm   34.3"</li><li>• Depth: 622 mm   24.5"</li><li>• Weight: Projection Module: &lt; 73 kg   161 lbs</li></ul>
Lichtbron	6x redundancy for each of 3 LED's
Levensduur lichtbron	> 60,000h (at 6500k) > 80,000h in eco mode MTBF LED > 500,000 h
Gebruiksomstandigheden	10°C-40°C, 50°F-104°F, 80% humidity (non-condensing)
Ingangsspanning (wisselstroom)	90 – 240 V, 50-60Hz
Vermogen	170W (eco) 230W (typ.) 350W (max)
Warmte­dissipatie	580 BTU/h (eco) 785 BTU/h (typ.) 1,194 BTU/h (max)
Signaal	2x Dual link DVI-D in / 2x Dual link DVI-D out Single link DVI-D in, with HDCP (optional)
Directe Ethernet-toegang	Built in web server
Grafische gebruikersinterface	All settings and operational parameters
Signaal­ingang/-­uitgang	2x Dual link DVI in / 2x Dual link DVI out Single link DVI in, with HDCP (optional)
Pixelklok	330 MHz
Ingangsfrequentie	24 – 62 Hz
Genlock	49 – 61 Hz
Signaal­verwerking	Loop through Free cropping, free scaling (optional)
Integratie met apparatuur van derden	WEB service API (optional)
Garantie	2 years

**Laatst bijgewerkt: 08 Jul 2024**

© 2024 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer [www.barco.com](http://www.barco.com) voor de nieuwste specificaties.