


XDX-4K40

40,000 lumens, native 4K, 3-chip DLP RGB laser projector

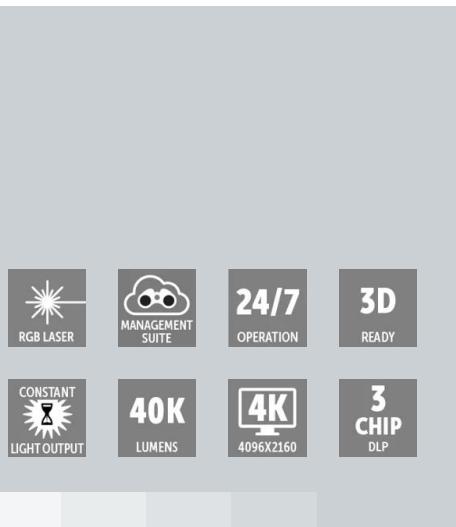

- Pure RGB laser light source
- Brilliant image with native 4K resolution and Rec. 2020 color performance
- Modular design for cost-effective serviceability

The XDX-4K40 boasts 40,000 lumens of brightness, native 4K (4096x2160) resolution and a pure RGB laser light source. Suited to themed entertainment applications that require, and make use of, the higher resolution and color performance, the XDX-4K40 creates those WOW moments that keep visitors coming back for more.

Images that speak

Offering visitors crisper, more realistic images and with greater impact that create memorable moments. XDX-4K40 can create outstanding image quality that immerses audiences in the content for a truly believable experience allowing them to be engaged like never before; making the impossible possible.

Cost-saving design

The XDX-4K40 was designed with the priorities of the owner/operator in mind. They provide consistently high performance over a long period of time with minimal interventions and service required. And if the unthinkable should happen, the XDX-4K40 has easy to replace modules that can be quickly and easily swapped on-site by a trained technician. Even within the RGB Laser light source itself, individual 'laser plates' can be exchanged which means that maintaining the XDX-4K40 is both straight forward and cost effective.

Future proof

The high brightness, 4K native resolution and RGB Laser light source make the XDX-4K40 one of the most cutting edge projectors out there. Ready to satisfy the growing demands within the content creation community.

The new XDX-4K40 can be managed through Barco's cloud-based Insights Management Suite with remote health condition monitoring which guarantees 24/7 uptime and increases the reliability of the installation

Product specificaties	XDX-4K40
General specifications	
Native helderheid	40,000 lumens (typical)
Native contrastverhouding	2000:1 (typical)
Digital MicroMirror Device™	3x 1.38" DC4K
Resolutie	native 4K: 4096 x 2160
Kleurenspectrum	DCI P3 (98.5% of Rec.2020; when measured in xy-color coordinates) -RGB light source
Primelenzen	0.72:1; 1.0:1; 1.13–1.72:1; 1.46–2.10:1; 2.00–3.35:1; 2.53–4.98:1; 4.98–7.69:1 High-brightness and High-contrast lenses compatible
Langdurige stabiliteit van helderheid	40,000 hrs @ average usage conditions
Behuizing	integrated cooling design and patented sealed optical assembly
Afmetingen (B x L x H)	Projector incl feet: 760 x 1470 x 612 mm/ 29,92 x 57,87 x 24,09 inches
Gewicht	206kg / 454.2lbs (weight projector in frame)
Voedingsvereisten	single phase or triple phase 200-240V 20A
Warmtebelasting (max. vermogen)	12500 BTU/hr
Luchtauitstroom	615CFM
Omgevingstemperatuur	40°C/104F Max.
Omgevingsvochtigheid	85% Max.
Ingangen	HDMI 2.0
Ingangsfreqenties	max. 4096 x 2160 @ 60Hz
Geluidsniveau	50dB(A) @ 1m and @ 25°C ambient temperature
3D-systemen	Active glasses systems and polarization systems on silver screens are supported. Color separation systems are not supported.
Veiligheidsvereisten	Class 1 risk group 3
Energieverbruik	3.9kW (3W in Eco standby mode)
Gebruikersinterface	Touch Display and/or web based
24/7 operation	Yes*
*	* For optimal performance, switch off the projector regularly. For details please consult the manual.

Laatst bijgewerkt: 11 Mar 2024

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeelde reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.