


Nio Color 2MP (MDNC-2123 Option DE) Dental

2MP diagnostic display for the dental office

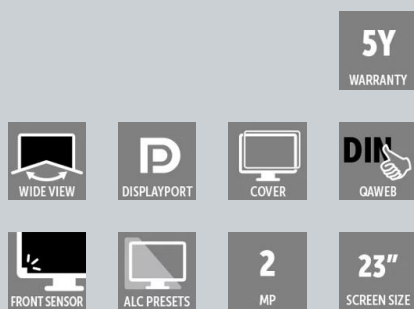

- Accurate, steady images
- Cleanable, stylish design
- A reliable companion for image viewing

Barco's Nio Color 2MP has everything it takes for your dental practice. It brings sharp and bright images to your desktop in a stylish but cleanable design.

Reliable diagnosis in your dental office

The Nio Color 2MP has been built for use in your reading or treatment room (room classes 5 and 6 as defined by DIN 6868-157). Its high brightness and contrast make subtle details more visible. So you can make diagnoses that are based on reliable images.

Automated quality control

Nio Color 2MP is always up to standard because of Barco's luminance sensor technology and QAWeb Enterprise software. By constantly measuring and monitoring display brightness, we can ensure that your dental images will look consistent and accurate over time and across displays.

Compliant with medical safety standards

Nio Color 2MP is available with a protective cover (optional) for easy cleaning while complying with the medical 60601 safety standard. We recommend the version with optional cover if you want to give your patients a clear picture of their oral health.

Models

- Nio Color 2MP dental with protective cover
- Nio Color 2MP without cover

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

Product specifications**NIO COLOR 2MP (MDNC-2123 OPTION DE) DENTAL**

| General specifications | |
|---------------------------------------|--|
| Screen technology | LCD |
| Active screen size (diagonal) | 598 mm (23.6") |
| Active screen size (H x V) | 521 x 293 mm (20.5 x 11.5") |
| Aspect ratio (H:V) | 16:9 |
| Resolution | 2MP (1920 x 1080 pixels) |
| Pixel pitch | 0.2715 mm |
| Color imaging | Yes |
| Gray imaging | Yes |
| Bit depth | 30 bit |
| Viewing angle (H, V) | 178° |
| Ambient light presets | Yes, reading room selection |
| Ambient light sensor | Yes |
| Front sensor | Yes |
| Maximum luminance (panel typical) | 460 cd/m ² |
| DICOM calibrated luminance | 370 cd/m ² |
| Contrast ratio (panel typical) | 1000:1 |
| Response time ((Tr + Tf)/2) (typical) | 15 ms |
| Housing color | RAL 9003 |
| Video input signals | 1x DVI 1x DisplayPort |
| USB ports | 1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream |
| Power requirements | Internal power supply (100-240 Vac, 50-60 Hz) |
| Power consumption | 25 W (nominal) < 0.5 W (hibernate) < 0.5 W (standby) |
| Dimensions with stand (W x H x D) | 560 x 412~512 x 202 mm |
| Dimensions w/o stand (W x H x D) | 560 x 335 x 61 mm |
| Dimensions packaged (W x H x D) | 700 x 465 x 230 mm |
| Net weight with stand | Option DE WP: 8.0 kg Option DE WH: 6.7 kg |
| Net weight w/o stand | Option DE WP: 5.8 kg Option DE WH: 4.5 kg |
| Net weight packaged | Option DE WP: 11.0 kg Option DE WH: 9.7 kg |
| Tilt | -1° to +24° |
| Pivot | 90° |
| Height adjustment range | 100 mm (landscape) |
| Mounting standard | VESA (100 mm) |
| Screen protection | Option DE WP: Protective, anti-reflective glass cover Option DE WH: N/A |
| Recommended modalities | All digital images, except digital mammography |

Product specifications**NIO COLOR 2MP (MDNC-2123 OPTION DE) DENTAL**

| | |
|------------------------------|--|
| Certifications | FDA 510(K) K171812 for General Radiology CE0123 (Medical Device) KC (Korea) EAC (Russia) Safety specific: IEC 60950-1:2005 + A1:2009 EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 IEC 60601-1:2005 + A1:2012 EN 60601-1:2006 + A1:2013 + A12:2014 ANSI/AAMI ES 60601-1:2005 + R1:2012 CAN/CSA C22.2 No. 60601-1:14 EMI specific: IEC 60601-1-2:2014 (ed4) EN 60601-1-2:2015 (ed4) FCC part 15 Class B ICES-001 Level B VCCI (Japan) Environmental: EU RoHS, REACH, Canada Health, WEEE, Packaging Directive |
| Supplied accessories | User guide Documentation disc System sheet DisplayPort video cable Mains cable(s) USB cable |
| Optional accessories | Graphics board Touch pad |
| QA software | MediCal QAWeb |
| Warranty | Minimum 3 years, including 20,000 hours backlight warranty Please check the Barco Terms & Conditions for specific Warranty conditions. |
| Operating temperature | 0 °C to 40 °C (15 °C to 35 °C within specs) |
| Storage temperature | -20 °C to 60 °C |
| Operating humidity | 8% to 80% (non-condensing) |
| Storage humidity | 5% to 85% (non-condensing) |
| Operating pressure | 70 kPa minimum |
| Storage pressure | 50 to 106 kPa |

Last updated: 07 May 2024

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.