


OverView MVL-6715

Industry-standard 67" SXGA+ 4:3 LED video wall

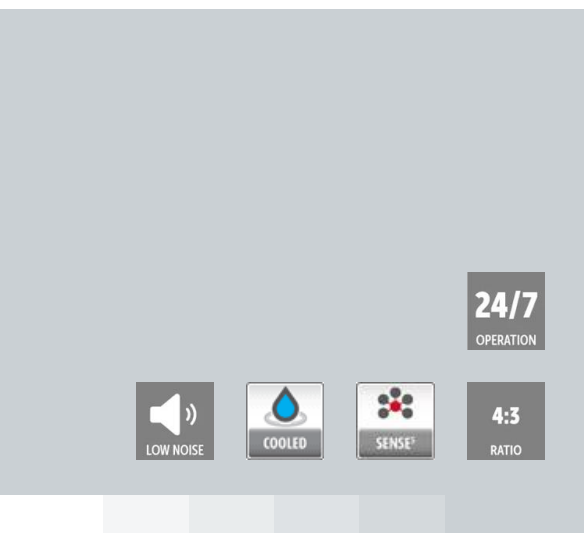

The OverView MVL-6715 is an easy to operate 4:3 LED-lit projection module that has been designed to offer the typical detail and brightness needs in SXGA+ resolution for control rooms where space is not a constraint.

Unmatched LED lifetime

Barco's unique liquid cooling system significantly reduces the temperature of the LEDs. This not only prolongs the lifetime of the LEDs (>80,000 hrs), but also allows for durably higher brightness levels. The long LED lifetime guarantees a great uptime and very low overhead costs. The use of LEDs as a light source, also results in low power consumption.

Comfortable viewing experience

To ensure good wall uniformity in terms of color and brightness levels, the OverView MVL-6715 comes with Barco's Sense5 automatic calibration system. This system works with an advanced color sensor that continuously measures the primary color levels of the entire wall, and adjusts white point and color when needed. This results in a significantly more accurate cube to cube uniformity, over the complete runtime. Furthermore, the module's robust structure makes the OverView MVL-6715 suitable for use in industrial environments.

Key characteristics

- 6x redundancy of LEDs (per color)
- 3rd generation LEDs for unmatched brightness & minimal power consumption
- Sense5 automatic white point and primary colors calibration, for brightness and color stability
- Active liquid cooling ensures longer LED lifetime
- Wide color gamut
- Less disposables, less waste
- 4:3 aspect ratio, 16:9 version becomes available during 2013

Product specificaties**OVERVIEW MVL-6715**

General specifications	
Resolutie	1400x1050
Helderheid	on-screen: 305 Cd/m ²
Contrast op scherm	1,200,000:1 (dynamic)
Weergavetechnologie	DLP rear projection
Kleurenspectrum	EBU
Wit punt	6500k
Scherm	WV-FEL
Kleurstabiliteit	Self calibration with Sense ⁵ based on advanced color sensor
Afmetingen	<ul style="list-style-type: none">▪ Diagonal: 67"▪ Width: 1364 mm 53.7"▪ Height: 1023 mm 40.3"▪ Depth: 942 mm 37.1"
Lichtbron	Light source 6x redundancy for each of 3 LEDs
Levensduur lichtbron	> 60,000h (typ.) > 80,000h (eco) MTBF LED: > 500,000h
Gebruiksomstandigheden	10°C-40°C, 80% humidity (nc)
Ingangsspanning	90 – 240 V, 50-60Hz
Vermogen	150W (eco) 200W (typ.) 270W (max)
Warmtedissipatie	510 BTU/h (eco) 680 BTU/h (typ.) 920 BTU/h (max)
Signaalingang/-uitgang	Dual link DVI in / Dual link DVI out
Pixelklok	320 MHz
Ingangsfrequentie	24 – 62 Hz
Genlock	49 – 61 Hz
Signaalverwerking	Loop through Cropping / upscaling
Directe Ethernet-toegang	Built-in web server
Grafische gebruikersinterface	All settings and operational parameters
Integratie met apparatuur van derden	WEB service API (optional)
Garantie	2 years
Helderheidsuniformiteit	>95%
Ruimte tussen schermen	< 1.5 mm 0.06" (@25°C) < 0.4 mm 0.015" (@30°C)
Gewicht	80.5 kg 177.5 lbs (projection module) and 21 kg 46.3 lbs (pedestal)
Signaalverbinding	Loop through
Interface van derden	WEB service API (optional)

Laatst bijgewerkt: 12 Apr 2024

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.