


Nio Color 2MP HB (MDNC-2121)

2 MegaPixel high-bright color display system

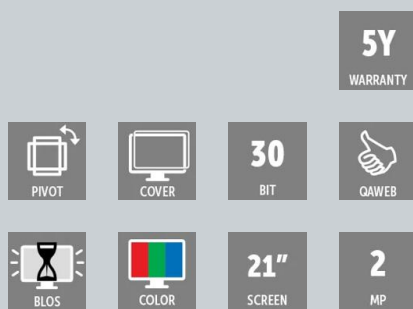

Nio Color 2MP HB is an industry-standard 2 MegaPixel color display system for dependable diagnostic viewing in high-bright color.

Confident color reading

The Nio Color 2MP HB offers unrivalled color accuracy, smooth greyscales, a high contrast ratio and a wide viewing angle to ensure accurate multi-modality diagnostic imaging.

Nio at a glance

- Dependable, proven technology > Long-term confidence at an exceptional value
- Complete product line > Optimized solutions for various modalities
- Perfect color matching between displays > Identical image quality on every screen
- Individual auto-calibration to DICOM > Worry-free deployment
- High-speed image rendering > Maximum productivity
- Uniformity correction > Compliance to regional QA standards
- 5-year warranty > Worry-free diagnostics for many years

Product specifications**NIO COLOR 2MP HB (MDNC-2121)****General specifications**

Screen technology	TFT AM Color LCD IPS
Active screen size (diagonal)	541 mm (21.3")
Active screen size (H x V)	432 x 324 mm (17.0 x 12.8")
Aspect ratio (H:V)	4:3
Resolution	2MP (1600 x 1200)
Pixel pitch	0.2700 mm (0.01063")
Color imaging	Yes
Gray imaging	Yes
Color support	24 bit
Viewing angle (H, V)	176°
Uniformity Technology	Yes
Per Pixel Uniformity (PPU)	No
Ambient Light Compensation (ALC)	No
Backlight Output Stabilization (BLOS)	Yes
I-Guard	No
Maximum luminance	750 cd/m ²
DICOM calibrated luminance (ULT off)	400 cd/m ²
Contrast ratio (ULT off)	1050:1
Response time (Tr + Tf)	35 ms
Video input signals	DVI-D Single Link (1x), DisplayPort (1x)
USB ports	1 upstream (endpoint), 2 downstream
USB standard	2.0
Power consumption (nominal)	72W
Power save mode	Yes
Dimensions with stand (W x H x D)	Portrait: 382x530~589x250mm/Landscape: 488x480~540x250 mm
Dimensions w/o stand (W x H x D)	Portrait: 382x488x115 mm/Landscape: 488x382x115 mm
Net weight with stand	14.0 kg
Mounting standard	VESA (100 mm)
Screen protection	Protective, non-reflective PMMA cover
Recommended modalities	CT, MR, US, DR, CR, NM, Film
Certifications	UL60601-1, CB60601-1, CSA C22.2 No 601.1, EN60601-1-2, EN55011 Limit B, ICES-001 B, EN61000-3-2/3, EN61000-4-2/3/4/5/6/8/11, VCCI, CE0120, KETI, CCC, BSMI, Demko, FCCB, FDA 510K, CMDCAS, MDD, WEEE, RoHs
Supplied accessories	Getting Started Guide Quick-Installation Sheet Video cables (1 x DVI Single Link, 1 x DisplayPort) Main cables (UK, European (CEBEC/KEMA), USA (UL/CSA; adaptor plug NEMA 5-15P), Chinese (CCC)) USB 2.0 cable External power supply
Optional accessories	NA
QA software	MediCal QAWeb
Warranty	5 years

Last updated: 08 Jul 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.