


ScenergiX Controller 3 x 1

ScenergiX Controller 3 x 1

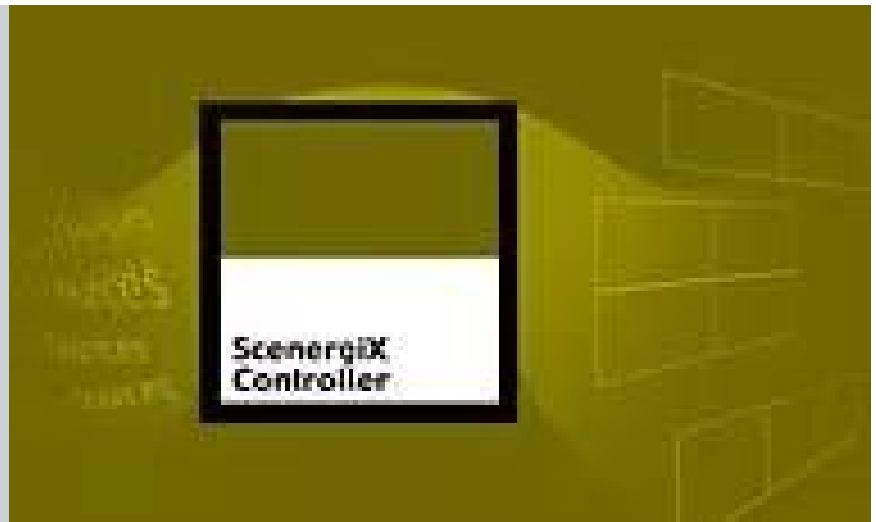

- up to 3 addressable displays
4 fully configurable inputs
19 in ch rack mount
Standard equipped with Xlite Toolset, controlling software.
Multipurpose device:
both Daylight Display and Projection
Arrange your sources onto your display through an intuitive interface.
Scale and position all sources exactly how you want them.
Overlay sources using advanced chroma-keying and alpha blending features.
Process video and data in pure quality onto your display.
Compatible with all standard image formats.

기술 사양

SCENERGIX CONTROLLER 3 X 1

일반 사양

입력	4 user defined inputs Front accessible Integrated video processing Auto sensing, hot swappable S-video, composite, YUV, RGB SDI, HD-SDI, DVI up to UXGA
호환성	Barco Daylight Displays Projectors
출력	Three multifunctional outputs: DVI-A, DVI-D, RGB
컨트롤	· Scaler 4 input channels [Data-Video] fully scalable to desired output resolution · Z-order Instant modification of Z-order control, for each output window · Window positioning Intuitive positioning interface · Connectors RS 232 [RJ11]
효과	Anamorphic imaging Chroma-keying [per input] Alpha-keying [per input] Z-order control Windowing/View ports
작동 T°	0° <> 45°
전원	240W-480W auto ranging 90-264V (50-60 Hz) Connector: 3 pin IEC
주문 정보	R9851600

작성일: 09 Jul 2024

© 2024 Barco nv. All rights reserved. 서면 허가 없이 전체 또는 부분을 복제하는 것은 금지됩니다. 모든 브랜드명 및 제품명은 상표, 등록 상표 또는 해당 소유자의 상표입니다. 지속적인 혁신으로 인해 정보 및 기술 사양은 사전 고지 없이 변경될 수 있습니다. 최신 사양은 www.barco.com을(를) 확인하세요.