


MatrixPRO-II 3G/HD/SD-SDI series

High-speed 3G serial digital routers

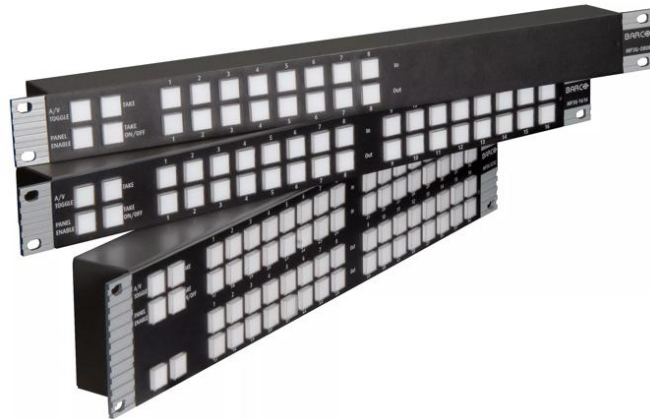

- **Three cost-effective, compact models available**
- **Genlock input with loop through**
- **Flexible control**

Barco's MatrixPRO-II SD/HD/3G-SDI series offers three models of high-speed serial routers: 8x8, 16x16 and 32x32. All three models are compact, have an extremely slim profile, are cost-effective, and provide an excellent solution for applications where budget and space are at premium.

Featuring genlock input

All routers support SDI formats from SD formats to 3G/HD. Their superior design allows for image switching and signal distribution without artifacts. They all feature a genlock input with loop through, ensuring that all switching is synchronized with the house sync.

Flexible control

The routers can be controlled from the front panel, RS-232, Ethernet connections or the Encore and ScreenPRO-II presentation systems. Barco's MatrixPRO-II SDI router series allows a single unit to be subdivided into multiple layers.

Product specifications

MATRIXPRO-II 3G/HD/SD-SDI SERIES

General specifications

Supported signal formats	DVB-ASI, SMPTE 259M, SMPTE 292M, SMPTE 424M; 270M bps – 2.97Gbps; 2K, 2048x1556/23.98 and 24
Inputs	<ul style="list-style-type: none">Standard: SMPTE 259M / SMPTE 292M / SMPTE 424MData rate: 270Mbps – 1.485Gbps / 2.97GbpsConnector: 75 ohm BNC femaleImpedance: 75 ohm nominalReturn loss: > 15dB (5MHz-1.485Ghz); > 10dB (1.5GHz – 3GHz)Cable equalization:<ul style="list-style-type: none">Automatic up to 70m @ 2.97Gbps, typical Belden 1694AAutomatic up to 100m @ 1.485Gbps, typical Belden 1694AAutomatic up to 300m @ 270Mbps, typical Belden 8281
Outputs	<ul style="list-style-type: none">Connector: 75 ohm BNC femaleImpedance: 75 ohm nominalReturn loss: > 15dB (5MHz-1.485Ghz); > 10dB (1.5GHz – 3GHz)Signal level: 800mVp-p \pm10%Rise/fall time:<ul style="list-style-type: none">- 20% - 80%- SD limit: 0.4ns – 1.5ns, < 0.5ns rise/fall variation;- HD limit: < 270ps, < 100ps rise/fall variation;- 3G-HD limit: < 135ps, < 50ps rise/fall variationAmplitude overshoot: < 10%Signal polarity: Non-inverting electrical with respect to inputs
Signal Speed	<ul style="list-style-type: none">Timing jitter: SD: < 0.2 UI; 3G-HD/HD: <1UIAlignment jitter: SD: <0.2UI; 3G-HD/HD: <0.2UI
Safety Regulations	Compliant with CE EN55103-1 and 2
Control	Serial port: RS-232, DB9 connector female Ethernet port: 10/100BaseT Ethernet bus, 1x RJ45 connector
Power consumption	<ul style="list-style-type: none">R9004661 (8x8): current: @ +15V/-15V: 900/2 mA - power: 14WR9004661 (16x16): current: @ +15V/-15V: 1,273/4 mA - power: 19WR9004662 (32x32): current: @ +15V/-15V: 1,302/1,035 mA - power: 35W
Power supply (R9871081)	<ul style="list-style-type: none">AC supply: 100-240 VAC, 50-60 Hz / Max. 1.6AAC main connector: IEC 320DC output: current: +15V, max 2.2A / -15V, max 1.35A / Power: maximum 43WDC connector: DB9, femaleWeight: 0.35 kg / 0.77 lbsSafety standards: compliant with CE EN60950, UL-1950/CSA22.2
Dimensions (HxWxD)	<ul style="list-style-type: none">R9004661 (8x8) - R9004660 (16x16): 44 x 483 x 50 mm / 1.73" x 19" x 1.97"R9004662 (32x32): 88 x 483 x 50 mm / 3.46" x 19" x 1.97"
Weight	<ul style="list-style-type: none">R9004661 (8x8): 1.3 kg / 2.86 lbsR9004660 (16x16): 1.4kg / 3.08 lbsR9004662 (32x32): 2.2 kg / 4.84 lbs

Last updated: 09 Jul 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.