
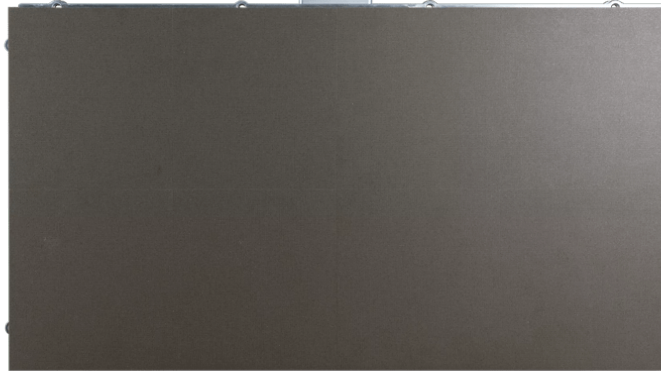


# XT1.2

1.2mm pixel pitch, indoor high-res LED display

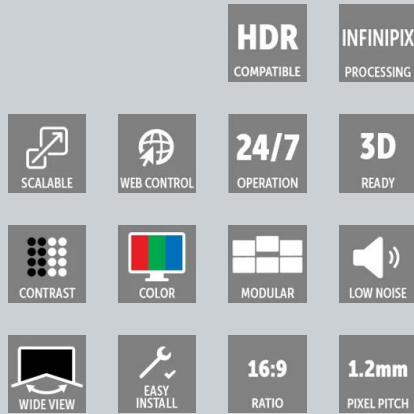

- 27" tiles in 16:9 aspect ratio
- Powered by Barco's Infinipix™
- Rec. 709 correct colors
- Easy to use, install and maintain
- Maximized product uptime

The new XT series further expands Barco's indoor high-resolution LED tiles portfolio. The 27" inch tiles with a pixel pitch ranging from 0.9mm to 1.9mm deliver superior seamless results, and the series includes all necessary features to maximize the reliability of your LED wall.

### Superior viewing experience

With each tile having a 16:9 aspect ratio, it is child's play to create native Full HD or UHD screens. This allows displaying video in the most common formats in full, without compression or unused canvas. What's more, the camera-supported seam correction technology makes sure tiles easily align, creating a single seamless canvas viewing experience.

### Easy to install and maintain

Because these LED tiles are designed for wall mounting, they are fully accessible from the back and/or the front – creating a shallow depth. The improved robustness and the Assisted Module Extraction makes sure the tiles can be easily removed, for maintenance or replacement needs, with a reduced risk of pixel damage.

### Always premium image quality

Thanks to Infinipix™, image quality is perfect in both dimmed and high-brightness mode with consistent Rec. 709 color accuracy. Video artefacts typically arise on fast-moving content – but with Infinipix™, no image tearing or video hiccups occur with fast-moving images. Automatic calibration makes sure the entire wall is perfectly uniform at any time.

### Unrivalled reliability

In order to support the use of Direct LED in critical environments and prevent downtime, redundancy of both power and data can be integrated in the XT1.2. Also, instead of facing sudden complete wall downtime, the users can get a warning so proactive measures can be taken against potential wall failures.

All XT series displays are backed by a three-year product warranty period. For extra peace of mind, customers can sign up for an additional EssentialCare maintenance contract with batch compatible modules up to seven years.

**Product specifications****XT1.2**

General specifications	
Pixel pitch	1.2mm
Pixels per tile	480 x 270 px (HxV)
LED lifetime	100,000h (video -50% brightness)
Brightness	800 nits
Processing	23 bit
Colors	281 trillion
Control	Infinipix™
Refresh rate	3,840 Hz
Hor. viewing angle	160° +/-5° (@50% brightness)
Vert. viewing angle	160° +/-5° (@50% brightness)
Brightness uniformity	>98%
Dimming	0-100%
Ergonomics	Patented driver algorithm to reduce eye fatigue
Contrast	>9,000:1
HDR	HLG / HDR10 / HDR10+ supported
Concave curvature	Up to 5° inter-tile
Convex curvature	90° corner supported
Power consumption	302 W/m <sup>2</sup> (typ.) 704 W/m <sup>2</sup> (max.)
Heat dissipation	1,030 BTU/hr/m <sup>2</sup> (typ.) 2,401 BTU/hr/m <sup>2</sup> (max.)
Operation power voltage	100-240V / 50-60Hz
Operational temperature	-10°C to +40°C / 14°F to 104°F
Operational humidity	10-80%
IP rating	IP30
3D	3D supported
Dimensions	609.92 x 343.08 x 71 mm (WxHxD)/ 24.01 x 13.51 x 2.79 inch (WxHxD)
Aspect ratio	16:9
Weight / Tile	7.5 kg / 16.53 lbs
Serviceability	Front and back service
Module replacement	Automated motorized extraction
Seam compensation	Automatic camera-based seam compensation
Certifications	CE, UL, FCC class A, CB, RoHS, WEE, REACH
Warranty	3 years standard product warranty EssentialCare maintenance contracts with batch compatible modules up to 7 years

Last updated: 22 Jun 2023

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.