
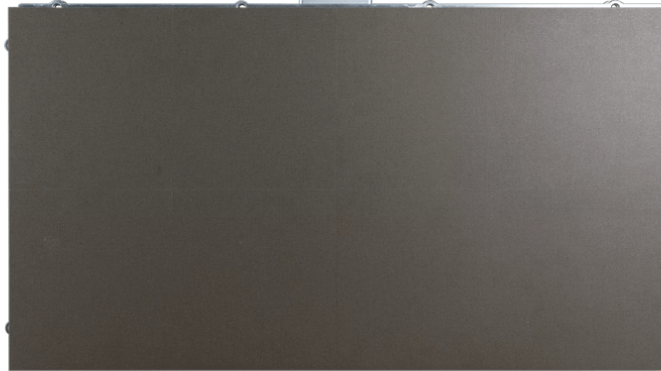


# XT1.2

1.2mm pixel pitch, indoor high-res LED display

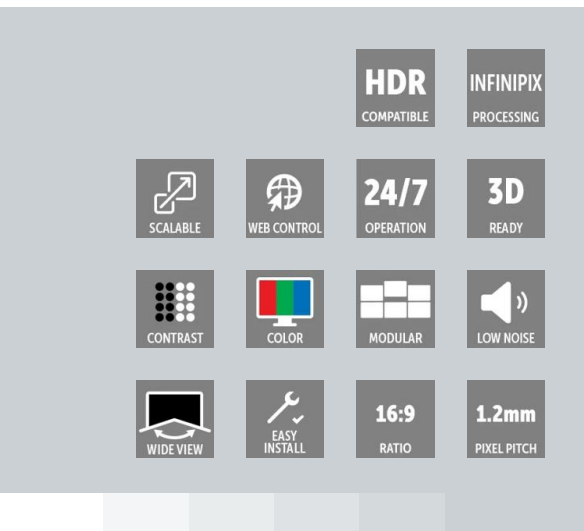

- 27" tiles in 16:9 aspect ratio
- Powered by Barco's Infinipix™
- Rec. 709 correct colors
- Easy to use, install and maintain
- Maximized product uptime

The new XT series further expands Barco's indoor high-resolution LED tiles portfolio. The 27" inch tiles with a pixel pitch ranging from 0.9mm to 1.9mm deliver superior seamless results, and the series includes all necessary features to maximize the reliability of your LED wall.

### Superior viewing experience

With each tile having a 16:9 aspect ratio, it is child's play to create native Full HD or UHD screens. This allows displaying video in the most common formats in full, without compression or unused canvas. What's more, the camera-supported seam correction technology makes sure tiles easily align, creating a single seamless canvas viewing experience.

### Easy to install and maintain

Because these LED tiles are designed for wall mounting, they are fully accessible from the back and/or the front – creating a shallow depth. The improved robustness and the Assisted Module Extraction makes sure the tiles can be easily removed, for maintenance or replacement needs, with a reduced risk of pixel damage.

### Always premium image quality

Thanks to Infinipix™, image quality is perfect in both dimmed and high-brightness mode with consistent Rec. 709 color accuracy. Video artefacts typically arise on fast-moving content – but with Infinipix™, no image tearing or video hiccups occur with fast-moving images. Automatic calibration makes sure the entire wall is perfectly uniform at any time.

### Unrivaled reliability

In order to support the use of Direct LED in critical environments and prevent downtime, redundancy of both power and data can be integrated in the XT1.2. Also, instead of facing sudden complete wall downtime, the users can get a warning so proactive measures can be taken against potential wall failures.

All XT series displays are backed by a three-year product warranty period. For extra peace of mind, customers can sign up for an additional EssentialCare maintenance contract with batch compatible modules up to seven years.

**Product specificaties****XT1.2**

General specifications	
Pixelpitch	1.2mm
Pixels per paneel	480 x 270 px (HxV)
Led-levensduur	100,000h (video -50% brightness)
Helderheid	800 nits
Verwerking	23 bit
Kleuren	281 trillion
Controle	Infinipix™
Vernieuwingsnelheid	3,840 Hz
Hor. kijkhoek	160° +/-5° (@50% brightness)
Vert. kijkhoek	160° +/-5° (@50% brightness)
Helderheidsuniformiteit	>98%
Dimmen	0-100%
Ergonomie	Patented driver algorithm to reduce eye fatigue
Contrast	>9,000:1
HDR	HLG / HDR10 / HDR10+ supported
Concave kromming	Up to 5° inter-tile
Convexe kromming	90° corner supported
Energieverbruik	302 W/m <sup>2</sup> (typ.) 704 W/m <sup>2</sup> (max.)
Warmtedissipatie	1,030 BTU/hr/m <sup>2</sup> (typ.) 2,401 BTU/hr/m <sup>2</sup> (max.)
Netspanning bij gebruik	100-240V / 50-60Hz
Bedrijfstemperatuur	-10°C to +40°C / 14°F to 104°F
Operationele vochtigheid	10-80%
IP-classificatie	IP30
3D	3D supported
Afmetingen	609.92 x 343.08 x 71 mm (WxHxD)/ 24.01 x 13.51 x 2.79 inch (WxHxD)
Beeldverhouding	16:9
Gewicht / tegel	7.5 kg / 16.53 lbs
Onderhoudsgemak	Front and back service
Vervangen Module	Automated motorized extraction
Naadcompensatie	Automatic camera-based seam compensation
Certificeringen	CE, UL, FCC class A, CB, RoHS, WEE, REACH
Garantie	3 years standard product warranty EssentialCare maintenance contracts with batch compatible modules up to 7 years

**Laatst bijgewerkt: 22 Jun 2023**

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg [www.barco.com](http://www.barco.com) voor de meest recente specificaties.