


DP4K-45L

Ultra-bright 6P RGB laser cinema projector for premium large screens

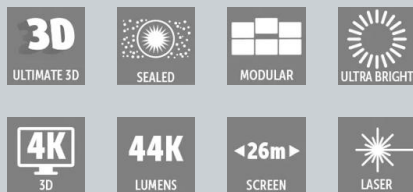

- Exceptional image quality
- Stunning brightness
- Simplified operations
- Reduced operating expenses

Barco's state-of-the-art DP4K-45L laser cinema projector brings brilliant brightness levels and cutting-edge image quality to your large screen. In this way you can provide audiences with a stunning experience that's only available in theaters. The projector combines its exceptional image quality with simplified operations and reduced operating expenses.

Unprecedented image quality

The Barco DP4K-45L offers superior image quality with a remarkable brightness level, increased contrast ratio and vivid colors for a radically improved (3D) movie experience. The 2D and 3D images it displays are laser-sharp with superbly saturated and uniform colors. Geared with the unique Barco Alchemy Integrated Cinema Media Processor (ICMP), it's capable of showing 4K content at 60 frames per second and 3D movies in 4K.

Simplicity: less is more

Fully integrated, the DP4K-45L greatly reduces complexity. It not only frees you from all lamp-related costs and maintenance, thanks to the single projector setup you can also seamlessly integrate it into your current system. In this way installing and operating the projector also becomes easier and downtime is reduced.

Total Cost of Ownership champion

One major saving of the projector is that there are no lamp-related material, maintenance, and administrative costs. Thanks to its superior optical efficiency level, operational costs were driven down as well. The DP4K-45L consumes 40% less power than xenon projectors with the same brightness. And its reliable laser light source offers a lifetime of 30,000 hours or more.

Product specificaties

DP4K-45L

General specifications

Helderheid	Up to 44,000 lumens
Native contrastverhouding	2,800:1 (typical) / 500:1 ANSI contrast (typical)
Primelenzen	1.13-1.65; 1.35-1.86; 1.46-2.10; 1.65-2.60; 2.00-3.35
Resolutie	4,096 x 2,160
Langdurige stabiliteit van helderheid	Less than 20% decrease during a runtime of 30,000 hrs
Afmetingen (B x L x H)	Projector: 744 x 1,445 x 706 mm / 29.3 x 56.9 x 27.8 inches (with feet, no lens) Two chillers, each with the following dimensions: 701 x 701 x 800 mm / 27.6 x 27.6 x 31.5 inches
Gewicht	Projector: 235kg (~520lb) Chillers: ~115kg (~250lb) per chiller (two chillers needed)
Lengte koelvloeistofslang	2.5-5-10m (8.2-16.4-32.8ft)
Voedingsvereisten	Projector: 200-240/346-415V 50-60Hz 16A 3W+N+PE (Y connection) / Power cord size range: 4 sq mm to 6 sq mm, 10AWG to 8AWG / Circuit breaker range: 25A to 40A 200-240V 3W+PE 28A 50-60Hz (Δ-connection) / Power cord size: 6 sq mm, 8AWG / Circuit breaker: 40A Chillers: 230/400V 3W+N+PE 16A, 2.5 sq mm (Y connection) or 208V / 3W+PE (Δ-connection) / Max. 16A per phase
Omgevingstemperatuur	30°C (86°F) Max. (projector and chillers)
Omgevingsvochtigheid	75% Max. (projector and chillers)
Energieverbruik	Projector @ full laser power: 5.2 kW (2D or Polarization 3D) / 2.8 kW (Barco Laser3D -6P) Chillers @ full laser power: 2.5 kW (2D or Polarization 3D) / 2.0 kW (Barco Laser3D -6P) Projector @ half laser power: 2.8 kW (2D or Polarization 3D) / 1.6 kW (Barco Laser3D -6P) Chillers @ half laser power: 2.0 kW (2D or Polarization 3D) / 1.5 kW (Barco Laser3D -6P)
Mediaserver	Barco Alchemy ICMP included in the projector: <ul style="list-style-type: none">■ JPEG2000 2K & 4K DCI play-out■ High Frame Rates 3D up to 120fps (60fps per eye)■ 2x Displayport■ 2x 3G-SDI inputs■ 1x HDMI 1.4a input 2D and PCM audio / 4K 24fps■ 16x AES/EBU audio channels (2x RJ45)
3D-systemen	Color3D (Barco Laser3D): Native 6-primary color-3D system. Only requires color filter glasses (Dolby3D glasses cannot be reused) Active glasses systems Polarization recuperation systems
DCI	Projector + Barco Alchemy ICMP DCI CTP 1.2 certified
Veiligheidsklasse	Class 1, RG 3
Certificeringen	CE; ETL/UL/FCC

Laatst bijgewerkt: 09 Jul 2024

© 2024 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer www.barco.com voor de nieuwste specificaties.