
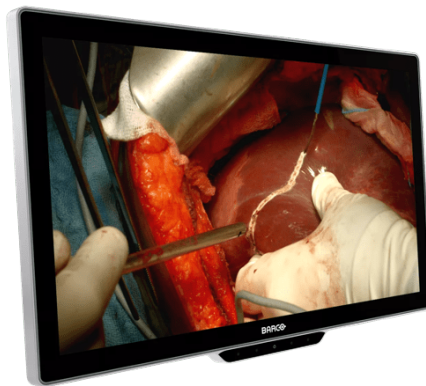


MDSC-8527 SSTF / NXF

4K UHD surgical display

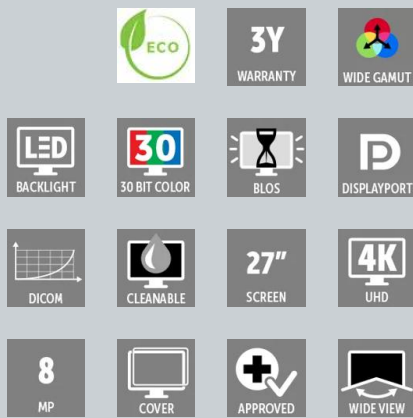

- **Optimized for endoscopy and surgical imaging**
- **Bright and crisp color video images**
- **Billions of true-to-life colors**
- **Accurate color-calibration**
- **Fast power on and automatic failover**
- **'A' ecolabel for a sustainable choice**

See more with surgical 4K precision, with our 27", A-ecolabel endoscopic and surgical display. This 4K UHD display offers exceptional brightness, crisp contrast, and vivid color video images, important where morphology is inconspicuous or recessed.

Uncompromising image quality

See more subtle differences with the MDSC-8527's 4K resolution. The wide color gamut and Barco's industry-leading calibration provide a full range of true-to-life colors. And ultra-low latency ensures real-time feedback for perfect hand-eye coordination.

Fast and efficient

The MDSC-8527 is low in weight and slim in design. Its dual user interface – there is one at the front and one at the back – accommodates individual user preferences. The display is fast to power-up, low in energy consumption, and features an automatic failover.

Easily set up and change the display's layout configurations to fit your procedure. And increase efficiency with customizable shortcut buttons.

User centric design

The slim lightweight modern design features an optimized full-front glass design with bezel protection on all sides safeguards against damage by surgical lights and IV poles. It also protects the display from surgical fluids and contaminants.

The fanless design (SSTF version) and intelligent cable cover support infection control, disinfection, and cleaning.

It is fast to power-up and features an automatic failover. A dual interface design (front and back) accommodates individual user preference while customizable



shortcuts enable faster user interactions.

The MDSC-8527 is approved for use in the vicinity of patients and includes an automated failover method.

The MDSC-8527 comes with a 3-year warranty and the possibility to extend this to 5, with our EssentialCare package.

'A' ecolabel for MDSC-8527

The MDSC-8527 has been subjected to Barco's ecoscoring protocol and has received the A label. To the score contributed the display's energy efficiency and its optimized packaging design, which includes a high degree of recycled content, uses no non-recyclable materials and is in itself recyclable.

Models

- MDSC-8527 SSTF: 27" 4K display with SSTP DisplayPort connectivity and fanless design, white version
- MDSC-8527 NXF: 27" 4K display with SSTP DisplayPort connectivity, fanless design and integrated Barco Nexxis Decoder (*), white version(*) Nexxis version 1.18.04 or higher

Product specificaties**MDSC-8527 SSTF / NXF**

General specifications	
Schermttechnologie	TFT AM LCD / LED backlight
Actief schermformaat (diagonaal)	27" (684 mm)
Formaat actief scherm (H x V)	596 x 335 mm
Beeldverhouding	16:9
Helderheid	Native: 800 cd/m ² (typical) Default setting: 550 cd/ m ² stabilized @6500K & Native color space
Resolutie	3840 x 2160 pixels
Pixelpitch	0,155 mm
Kleuondersteuning	1 billion (10 bit color depth)
Kleurenspectrum	Native: 88% NTSC
Kleurkalibratie	ITU-709, DCI-P3, BT.2020 (BT.2020 reproducible colors are within the limit of the LCD panel)
Kijkhoek	178° Hor / 178° Ver
Contrastverhouding	1000:1 (Typical)
Reactietijd	T _{on} + T _{off} = 16 msec (typical)
Wit punt	Calibrated: 5600K, 6500K, 7600K, 9300K
Gammacurve	Native, 1.8, 2.0, 2.2, 2.4, Video1, Video2, DICOM (review level)
Schermbescherming aan voorzijde	2-side anti-reflective alkali-aluminosilicate glass with anti-fingerprint coating
Keyboard	Front: 5-key capacitive touch -user programmable Rear: 5-key membrane
Video-ingangen	MDSC-8527 SSTF 4K-UHD input: <ul style="list-style-type: none">■ 1x DP 1.2 SST / MST up to 3840 x 2160 @ 50/60 Hz (user configurable)■ 2x HDMI™ 2.0 up to 3840 x 2160 @ 50/60 Hz FHD input (upscaled to UHD): <ul style="list-style-type: none">■ 1x DVI■ 1x 3G-SDI;■ Note: DP, HDMI and DVI all support HDCP 1.4 MDSC-8527 NXF 4K-UHD input: <ul style="list-style-type: none">■ 1x DP 1.2 SST / MST up to 3840 x 2160 @ 50/60 Hz (user configurable)■ 1x HDMI 2.0 up to 3840 x 2160 @ 50/60 Hz FHD input (upscaled to UHD): <ul style="list-style-type: none">■ 1x DVI■ 1x 3G-SDI;■ 2x FO SFP+ for 4K-UHD Nexxis link■ Note: DP, HDMI and DVI all support HDCP 1.4
Video-uitgangen	MDSC-8527 SSTF and NXF <ul style="list-style-type: none">■ 1x DP 1.2 SST (main input copy)■ 1x 3G-SDI (loop-through)
Andere connectiviteit	USB-A (Field FW update with USB stick) USB-B (remote control serial protocol) 2x 3.5 mm minijack audio/trigger (NXF version only) 2x USB-A keyboard/mouse (NXF version only)
Kenmerken	User-programmable function keys, Picture-in-Picture, Picture-by-Picture, Image Mirror and Rotation, Zoom, Pan, Failover mode, User profiles, High quality upscaling from SD / FHD input to UHD, FW upload from memory stick

Product specificaties**MDSC-8527 SSTF / NXF**

Energieverbruik	MDSC-8527 SSTF Max. 90W / 25V ± 10% Low power mode: MDSC-8527 NXF Max. 100W / 25V ± 10% Low power mode:
Externe voeding	AC input: 100 – 240 VAC / 47-63 Hz auto-switch DC output: +25 VDC / 8 A Dimensions: 204 x 81 x 43 mm (8.0 x 3.2 x 1.7") Weight: 1.15 kg (2.54 lbs)
Uitvoer (gelijkstroom)	DP connector: +3.3 V / 500 mA USB connector: +5 V / 1 A
Afmetingen (B x H x D)	657 x 418 x 75 mm (25.9 x 16.5 x 3.0")
Afmetingen verpakt (B x H x D)	750 x 660 x 170mm (29,5 x 26,0 x 6,7")
Net weight display	SSTF: 9.1 kg (20.0 lbs) NXF: 9.3 kg (20.5 lbs)
Nettogewicht verpakt	SSTF: 14.1 kg (31.1 lbs) NXF: 14.4 kg (31.7 lbs)
Montagestandaard	VESA 100 x 100 mm
Bedrijfstemperatuur	0°C to 35 °C for performance 0 °C to 40 °C for safety
Opslagtemperatuur	-20 °C to 60 °C
Vochtigheid in bedrijf	20% to 85% (non-condensing)
Vochtigheid bij opslag	10% to 85% (non-condensing)
Bedrijfshoogte	3000 m max. / 70 kPa
Opslaghoogte	5500 m max. / 50 kPa
NMS Compatibility (for NXF version only)	Compatible from NMS version 1.18.04 onwards. Please always check Nexxis OR System Compatibility Matrix
Certificeringen	Approvals/Marking: <ul style="list-style-type: none">■ CE (Medical Device Class I), c-UL-us, DEMKO, CCC, BIS, INMETRO■ Green compliance: ROHS-3, REACH, WEEE■ ANSI/AAMI ES 60601-1:2005/(R)2012■ CAN/CSA-C22.2 No. 60601-1: 14■ IEC 60601-1: 2012 Edition 3.1■ EN 60601-1: 2006 + A1:2013 + A12:2014■ IEC 60601-1-2: 2014 + A1:2020■ EN 60601-1-2: 2015 + A1:2021■ FCC CFR 47 Part 15 Subpart B (Class B)■ ICES-003 (Class B)■ GB17625.1-2012; GB4943.1-2011; GB/T9254-2008■ IS 13252(Part 1):2010/ IEC 60950-1 : 2005■ UL 60950-1, 2nd Edition (to make the equivalence with NOM-019)■ ABNT NBR IEC 60601-1:2010 + Emenda 1:2016■ ABNT NBR IEC 60601-1-2:2017■ ABNT NBR IEC 60601-1-6:2011 + Emenda 1:2020■ ABNT NBR IEC 60601-1-9:2010 + Emenda 1:2014
Beschermingsniveau	IP21 (IP45 front side only)
Garantie	3 years

Laatst bijgewerkt: 07 May 2024

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.