


OverView MVL-621

Industry-standard 60" full HD 16:9 LED video wall

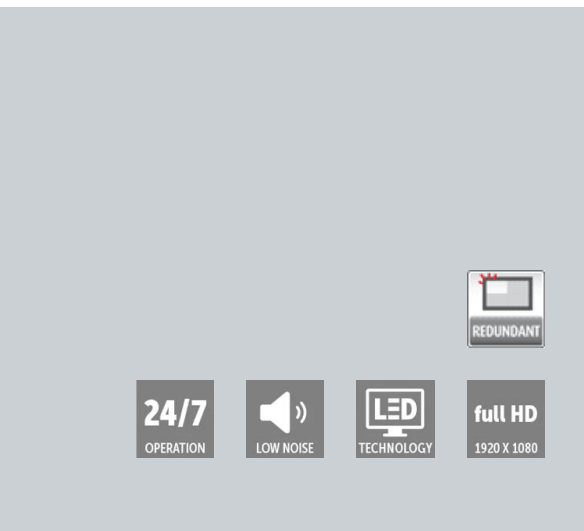

- High brightness
- Redundancy of critical components
- Low power consumption
- Remote management
- High reliability
- Sustainable product

The OverView MVL-621 is an easy to operate 16:9 LED-lit projection module that has been designed to offer the typical detail, brightness, and features in full HD resolution for control rooms where space is not a constraint.

This rear-projection video wall offers a well-balanced set of essential features, perfectly fitting the standard requirements. All this comes without any compromise in quality, and with a special focus on sustainability – in terms of limited power consumption, long lifetime and ability to upcycle.

Unmatched LED lifetime and brightness

The next-generation LED light source drastically improves the brightness of the MVL-621. With a 55% increase in maximum engine light output compared with the industry standard, the MVL-621 can be deployed in virtually all indoor lighting conditions. This impressive increase in brightness is realized with the exact same power needs.

MVL-621 also brings an important step-up in reliability, featuring redundant inputs to ensure a continuous data flow, an optional external power supply with automatic failover, and a light source lifetime of over 100,000 hours.

Easy installation and remote management

Barco's Video wall Manager software makes it a lot easier to install, configure and control the video wall. The cloud-based Video wall Management Suite, on its part, allows remote monitoring, diagnostics and control for Barco video walls. Allowing this kind of remote management from a central location, lowers operational costs and ensures faster and more effective troubleshooting.

Product specifications

OVERVIEW MVL-621

General specifications		
Resolution	Full HD (1920x1080)	
Brightness	Under native color gamut	
	Mode / Screen type	WV-FEL
	High brightness	730 cd/m ²
	Normal	490 cd/m ²
	Eco	245 cd/m ²
On-screen contrast	1,200,000:1 (dynamic)	
Display technology	Rear-projection DLP (rear access only)	
Color gamut	REC709	
White point	Customized white points	
Brightness uniformity	>95%	
Screen	Mid Gain Type, 180° viewing angle	
Screen gap	Adjustable up to 0.2 mm depending upon video wall configuration and operating temperature	
Color stability	Sense X: automatic real-time color and brightness calibration	
Dimensions	<ul style="list-style-type: none">■ Diagonal: 60"■ Width: 1328 mm 52.0"■ Height: 747 mm 29"■ Depth: 1056 mm 42"■ Weight: 104 kg 228 lbs	
Light source	6x redundancy for each of 3 LEDs	
Noise Level	Less than 20 dB (measured from 5m in front)	
Light source lifetime	> 100,000h in Eco/Normal mode	
Conditions for operation	10°C – 40°C 50°F – 104°F Up to 80% humidity (non-condensing)	
Input voltage	90 – 240 VAC, 50-60Hz	
Power	70W (eco)	
	100W (typ.)	
	150W (max)	
Heat dissipation	240 BTU/h (eco)	
	340 BTU/h (typ.)	
	510 BTU/h (max)	
Signal input/output	2x DP1.2 inputs & 1x output (4K@60Hz)	
	2x HDMI 2.0 inputs (4K@60Hz)	
	2x USB ports (only for power)	
	2x Ethernet ports	
HDCP	v2.2	
External power supply	Optional: Remote and redundant hot swappable power supply	
Signal processing	Loop through	
	Cropping, scaling with wall configuration	
Direct ethernet access	Built-in web server	
Graphical user interface	All settings and operational parameters	
Third party interface	WEB service API	
Warranty	2 years	

Last updated: 16 Oct 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.

