


Wodan

Designed for larger screens, Wodan delivers unbelievably bright and detailed images with spectacular color fidelity.

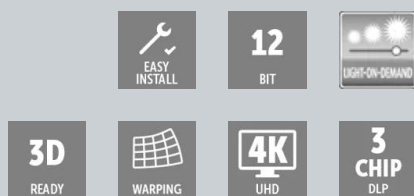

- Theater & Media Room Series
- 4K UHD Resolution (3,840 x 2,160)
- 3-Chip DLP
- Up to 15,000 ANSI Lumens

Wodan builds on the successful platform the Apollo 20. Designed for large screens, bright ambient light environments, outdoor entertainment spaces and contemporary glass home designs, each can benefit from an unbelievably bright and detailed image with spectacular color fidelity. What's new? Wodan has completely new processing electronics, connectivity and even more powerful built-in warp. Wodan features motorized lenses and lumen output is variable from 8,000 to 15,000 lumens.

Single Step Processing SSP™

Pulse is a hardware and software based platform that simplifies the signal allowing it to transmit from source to screen much faster, more efficiently and with less artifacts than ever before. We use an advanced image processing technique to display the image on the screen without any artefacts and with the lowest possible processing lag, this is made possible by our Single Step Processing (SSP™).

State of the art electronics

All new Pulse electronics have been designed to process 4K with HDMI 2.0a and HDCP 2.2 and the optical engine is utilising the very latest 0.9" DMD DLP chipset, delivering 3,840 x 2,160 pixels on screen. Wodan also features HDR, motorised lenses and auto aspect detection between 16:9 and cinemascope formats. Featuring Barco's unique RealColor processing, Wodan enables simple and accurate calibration to any desired white point or greyscale.

Building Blocks

Wodan offers 4K UHD resolution for superb image quality. Currently the most compact projector that offers 15,000 lumens light output, one of its most striking features is light-on-demand, offering flexible light output for different installation requirements.

Specifiche tecniche

WODAN

Specifiche generali

Tipo di proiettore	Three chip DLP
Tecnologia	3 x 0.90" DMD™
Risoluzione	3,840 x 2,160 (4K UHD)
Proporzioni	1.78:1 (16:9)
Sorgente luminosa	2.5 kW Xenon Lamp
Durata sorgente luminosa	1,000 hours typical
Emissione luminosa	Up to 15,000 ANSI lumens
CLO (Constant Light Output)	Yes
Rapporto di contrasto	2,200:1 Sequential 450:1 ANSI
Uniformità della luminosità	90%
Intervallo obiettivo	TLD+ (0.43:1) TLD+ (0.73 - 0.94:1) TLD+ (0.92 - 1.33:1) TLD+ (1.24 - 1.56:1) TLD+ (1.48 - 2.00:1) TLD+ (1.99 - 2.76:1) TLD+ (2.73 - 4.43:1) TLD+ (4.50 - 7.50:1) TLD+ (7.40 - 11.00:1)
Spostamento obiettivo ottico	Up to 65% vertical lens shift & up to 20% horizontal lens shift (depending on lens selection) Motorized zoom, focus, shutter and lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information
Schermo paralucente ottico	Yes
Correzione del colore	P7 RealColor™
Gamma di colori	Up to DCI (P3)
Elaborazione delle immagini	Embedded warp, bow correction & blend engine
WARP	Four corner warp
Orientazione	Table / Ceiling / Portrait (Lamp door down facing -see installation manual notes) / Vertical
Connessione in rete	10/100 Ethernet via RJ45 connection
Server web integrato	Yes
HDR	HDR10
3D	Active Eyewear (optional) Passive Infitec (optional) Passive Circular (optional) Double flash up to 96Hz Additional hardware required please contact an authorized Barco representative for details
Ingressi	1 x HDMI 2.0a (HDCP 2.0), 2 x HDBaseT (HDCP 1.4), 1 x Display Port 1.2 Quad 3G/12G SDI/BarcoLink
Risoluzioni in ingresso	VGA up to 4K (4,096 x 2,160) @ 120Hz
Controllo	IR, RS232, TCP/IP, WiFi (Optional), XLR Wired Remote, GSM (Optional), DMX 512 Driver modules available for: Crestron, Control4 and Savant
Requisiti di alimentazione	110-130V / 200-240V / 50-60 Hz
Consumo energetico	3,000 W / STBY
Livello di rumore (tipico a 25°C/77°F)	53 dBA
Intervallo temperature in funzionamento	0 to 40°C (sea level)
Umidità in funzionamento	0 to 80% (relative humidity)
BTU per ora	Max. 5,800 BTU/h @ (110-130V) Max. 10,236 BTU/h @ (200-240V)
Requisiti per flusso d'aria	Air Inlet (from Rear w/Feet Down): Front Exhaust (from Rear w/Feet Down): Rear
Ventilazione di scarico	TBD
Dimensioni (PXLXA)	475 x 725 x 382 mm (excluding lens) 18.70 x 28.54 x 14.96 in. (excluding lens)
Peso	50kg / 110lbs (excluding lens)
Dimensioni imballaggio (P x L x A)	650 x 900 x 560 mm (excluding lens - packaged separately) 25.59 x 35.43 x 22.04 in. (excluding lens - packaged separately)
Peso con imballo	TBD (excluding lens - packaged separately)
Temperatura a magazzino	TBD
Umidità a magazzino	10 to 90% (relative humidity)
Accessori standard	Power cord(s), wireless / XLR wired remote control
Certificazioni	Compliant with UL60950-1 and EN60950-1, complies with FCC rules & regulations, part 15 Class A and CE EN55022 Class A, RoHS
Garanzia	Limited 3 years parts and labor Extendable up to 5 years
*	Firmware upgradable Please contact an authorized Barco representative for details

Generato il: 09 Jul 2024

© 2024 Barco nv. Tutti i diritti riservati. La riproduzione totale o parziale è proibita in assenza di autorizzazione scritta. Tutti i nomi di marchi e di prodotti sono marchi, marchi registrati o nomi commerciali dei rispettivi proprietari. A causa delle continue innovazioni, le informazioni e le specifiche tecniche sono soggette a modifiche senza preavviso. Controlla www.barco.com per le specifiche più recenti.