



# T8

8.33mm pixel pitch, modular outdoor LED display

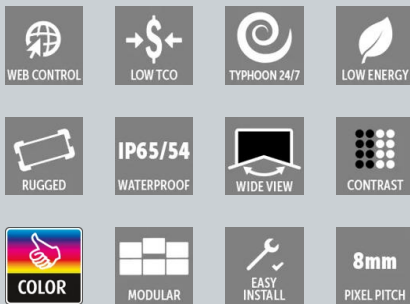

- Features a slim and lightweight cabinet
- Designed for fixed outdoor installations
- 24/7 performance

The T8 comes in a slim and lightweight cabinet with a shared power supply and controller and only four alignment points. In this way, it offers more flexibility and significantly shortens installation and alignment time, and dramatically reduces weight. Thank to its typhoon test, IP rating, and outdoor SMD technology, the T8 is designed for fixed installation in 24/7 outdoor branding and advertising.

### Unique cost-reducing design

The T8's unique design eliminates the need for a custom-calibrated secondary steel structure which is required for conventional tile-based LED screens. Built on self-supporting and scalable cabinets, it is directly fastened onto the main attachment points, which significantly cuts the cost of installation and the steel structure.

### Easy install

A limited set of components allows you to build modular cabinets of any size – consisting of up to eight by five LED modules, with each module measuring 40 by 40 centimeter. Measuring less than 140mm in depth and fully made of aluminum, the slim and lightweight T8 can be hung to any wall and internal components and cables can easily be accessed from the front as well as the back, without tools.

### Revolutionary processing

Next to offering outstanding image quality, the T8 also comes with the revolutionary Infinipix™ image processing platform. Infinipix™ excels in pixel bandwidth performance, and combines this with fully cloud-based monitoring, control and automated diagnostics.

**Key benefits**

- Excellent image quality, wide viewing angles
- Lowest weight in its class
- Minimum installation costs
- No precision supporting steel required
- Ultimate reliability
- Easy front AND back access
- Advanced web-based setup, monitoring and control

**Product specificaties****T8****General specifications**

Pixelpitch	8.33 mm
Led-configuratie	SMD
Pixel per module	48 x 48 (H x V) (real mode)
Pixeldichtheid	14,400/sqm
Helderheid	6,000 nits (max.)
Contrastverhouding	3,000:1
Verwerking	16 bit/color
Hor. kijkhoek	120° (@ 50% brightness)
Vert. kijkhoek	-50°/+25° (@ 50% brightness)
Energieverbruik	600W/m <sup>2</sup> (max.)
Netspanning bij gebruik	200-240V 50/60Hz
Led-levensduur	100,000 hrs
Warmte-dissipatie	2,046 BTU/hr/m <sup>2</sup> (maximum)
Bedrijfstemperatuur	-20/+50°C
Operationele vochtigheid	10-95%
IP-classificatie	Complete cabinet is rated IP54. Front side complies with IP65
Afmetingen	Cabinet dimensions: e.g. cabinet with a width of 8 modules and a height of 5 modules: 3,200 x 2,000 x 150 mm (W x H x D)
Gewicht	Weight / module: 40 kg (88 lbs) per square meter LED display. One module has an average weight of 6.4 kg (14.11 lbs)
Onderhoudsgemak	Front and back
Certificeringen	CE, ETL, FCC Class A, CEBEC, RoHS, WEEE

Laatst bijgewerkt: 08 Jul 2024

© 2024 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer [www.barco.com](http://www.barco.com) voor de nieuwste specificaties.