


S3 Standalone

Compact Event Master processor

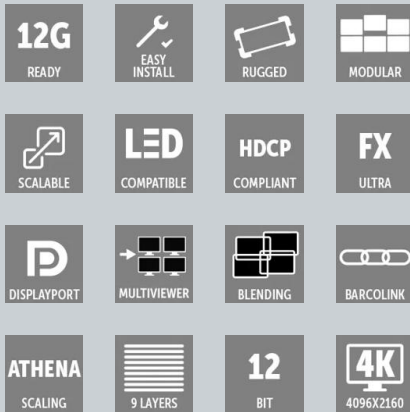

Update August 2021: With the release of the S3-4K empty chassis this S3-4K Standalone configuration will no longer be available once existing stock is consumed (first come, first served) and we will move fully into Build-to-order (BTO). We will continue to build the S3-4K Jr. and the S3-4K Tri-combo configurations.

With up to 12 HD inputs and 12 outputs, the S3 Standalone brings the power of the S3-4K processor to your applications that require less capacity. The S3 Standalone removes the linking capability of the S3-4K, but keeps all of the inputs, outputs, and layers. In the field it offers you the same processing performance, image quality and rugged durability. In short: all the tools you need to create a stunning live experience for clearly-defined projects and fixed installs. Being modular and upgradeable, if you need to link, simply install the linking card and the S3 standalone becomes a full S3-4K.

Powerful, easy, compact

- Modular card-based design
- Easy set-up with the cross-platform Event Master Toolset, providing a step-by-step approach to system configuration
- Dual, redundant power supplies for maximum peace of mind
- Widescreen blending support
- Interlinking available as an option

Product specifications**S3 STANDALONE**

General specifications	
Model	NGS-3U
Live effects canvas	Up to 20 megapixels in PVW/PGM or 40 megapixels in PGM only mode
Video inputs	<p>12 HD inputs via 3 input cards (Event Master series cards)</p> <ul style="list-style-type: none"> ■ Up to 3x 4K inputs - each input card supports up to 4K@60p ■ 4x SD/HD/3G SDI ■ 4x HDMI 1.4a (297 MHz max) ■ 4x DisplayPort 1.1 (300 MHz max)
Video outputs	<p>12 HD outputs via 3 output cards (Event Master Series Cards)</p> <ul style="list-style-type: none"> ■ Up to 3x 4K outputs - each output card supports up to 4K@60 p ■ 4x SD/HD/3G SDI ■ 4x HDMI 1.4a (297 MHz max) ■ 2x HDMI 1.4a for Multiviewer (297 MHz max) or 4x HDMI 1.4a when used as standard output card
Genlock	<p>Analog reference input/loop on BNC connectors; bi-level and blackburst at SD and tri-level at HD</p> <p>S3D Sync: 4x input Din connector, 2x output Din connector</p>
Program output	<p>Up to 8 program outputs configurable as single screens or tiled/blended widescreens (preview and Multi-Viewer not available in all configurations).</p> <p>Configurable for up to 8x 2048X1200@60 or up to 3x 4096x2400@60 outputs supporting Aux or Program destinations</p> <p>Independent edge blending/feathering control for all four sides.</p>
Scaled Aux outputs	<p>User-definable from 12x 2048x1200@60 to 3x 4K@60</p> <p>All outputs can be defined as Aux destinations for a total of 12 Aux outputs</p> <p>Output color correction</p>
Mixers	<ul style="list-style-type: none"> ■ Native resolution background mixer per output screen ■ Independent layer transitions or full Preview/Program transition ■ Flexible layer allocation – 4 mixable or 8 single scalable PIP/key layers assignable to any Program output screen
Still stores	Up to 100 HD or 25 UHD, depending on the import file size.
Layer effects	<ul style="list-style-type: none"> ■ Borders (hard, soft, halo) and drop shadows ■ Color effects ■ Strobe, H&V flip ■ Luma, chroma and Cut/Fill keys (not all modes support keying) ■ PIP moves via Keyframes
Multiviewer	<ul style="list-style-type: none"> ■ Flexible user-definable layouts ■ Monitor all Inputs and Outputs, including Preview and Aux ■ Two outputs ■ Dedicated hardware same as E2 Event Master Processor
Expandability	Linking is available as an upgrade option
HDCP	HDCP compliance determined by installed cards.

Product specifications**S3 STANDALONE**

Control	<ul style="list-style-type: none">■ Event Master screen management software for PC or Mac■ Event Master Controllers■ WebUI■ Ethernet RJ-45, 1000/100/10 Mbps autosense
Serviceability	Field-serviceable I/O and processing cards (not hot-swappable) Hot swappable dual-redundant power supplies (optional)
Noise Level	Max 51.3 dB avg. Fans at 100%. Fan speed is software-managed based on operating temperature. Reference ISO 7779
Dimensions	<ul style="list-style-type: none">■ Height: 13.26 cm / 5.22" - 3 RU rack mount■ Width: 43.2 cm / 17" without chassis handles, 48.3 cm / 19" with chassis handles attached■ Depth: 54 cm / 21.33" overall
Weight	21.3 kg / 47 lbs
Power	Input power: 100-240 VAC 50/60Hz 826 Watt Ships with single power supply. Optional Dual-redundant, hot-swappable power supplies available as upgrade.
Environmental temperature	0-40° C (32-104° F)
Environmental humidity	0-95% non-condensing (non-operating) 0-85% non-condensing (operational)
Warranty	3 years parts and labor

Last updated: 13 Jun 2023

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.