


OverView MVL-621

Industry-standard 60" full HD 16:9 LED video wall

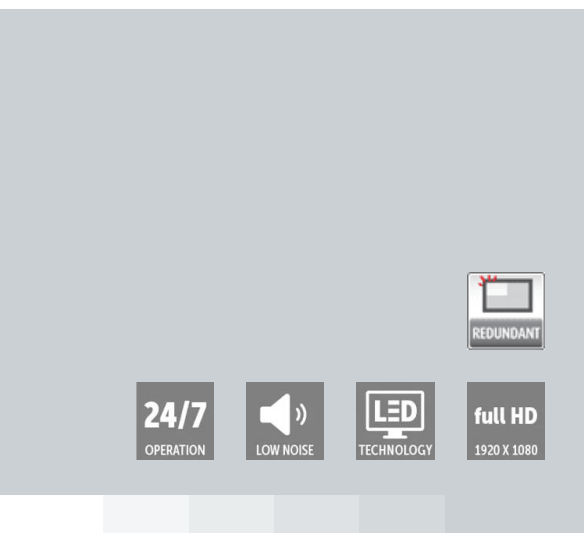

- High brightness
- Redundancy of critical components
- Low power consumption
- Remote management
- High reliability
- Sustainable product

The OverView MVL-621 is an easy to operate 16:9 LED-lit projection module that has been designed to offer the typical detail, brightness, and features in full HD resolution for control rooms where space is not a constraint.

This rear-projection video wall offers a well-balanced set of essential features, perfectly fitting the standard requirements. All this comes without any compromise in quality, and with a special focus on sustainability – in terms of limited power consumption, long lifetime and ability to upcycle.

Unmatched LED lifetime and brightness

The next-generation LED light source drastically improves the brightness of the MVL-621. With a 55% increase in maximum engine light output compared with the industry standard, the MVL-621 can be deployed in virtually all indoor lighting conditions. This impressive increase in brightness is realized with the exact same power needs.

MVL-621 also brings an important step-up in reliability, featuring redundant inputs to ensure a continuous data flow, an optional external power supply with automatic failover, and a light source lifetime of over 100,000 hours.

Easy installation and remote management

Barco's Video wall Manager software makes it a lot easier to install, configure and control the video wall. The cloud-based Video wall Management Suite, on its part, allows remote monitoring, diagnostics and control for Barco video walls. Allowing this kind of remote management from a central location, lowers operational costs and ensures faster and more effective troubleshooting.

Product specificaties**OVERVIEW MVL-621**

General specifications		
Resolutie	Full HD (1920x1080)	
Helderheid	Under native color gamut	
	Mode / Screen type	WV-FEL
	High brightness	730 cd/m ²
	Normal	490 cd/m ²
	Eco	245 cd/m ²
Contrast op scherm	1,200,000:1 (dynamic)	
Weergavetechnologie	Rear-projection DLP (rear access only)	
Kleurenspectrum	REC709	
Wit punt	Customized white points	
Helderheidsuniformiteit	>95%	
Scherm	Mid Gain Type, 180° viewing angle	
Ruimte tussen schermen	Adjustable up to 0.2 mm depending upon video wall configuration and operating temperature	
Kleurstabiliteit	Sense X: automatic real-time color and brightness calibration	
Afmetingen	<ul style="list-style-type: none">■ Diagonal: 60"■ Width: 1328 mm 52.0"■ Height: 747 mm 29"■ Depth: 1056 mm 42"■ Weight: 104 kg 228 lbs	
Lichtbron	6x redundancy for each of 3 LEDs	
Geluidsniveau	Less than 20 dB (measured from 5m in front)	
Levensduur lichtbron	> 100,000h in Eco/Normal mode	
Gebruiksomstandigheden	10°C – 40°C 50°F – 104°F Up to 80% humidity (non-condensing)	
Ingangsspanning	90 – 240 VAC, 50-60Hz	
Vermogen	70W (eco) 100W (typ.) 150W (max)	
Warmtedissipatie	240 BTU/h (eco) 340 BTU/h (typ.) 510 BTU/h (max)	
Signaalingang/-uitgang	2x DP1.2 inputs & 1x output (4K@60Hz) 2x HDMI 2.0 inputs (4K@60Hz) 2x USB ports (only for power) 2x Ethernet ports	
HDCP	v2.2	
Externe voeding	Optional: Remote and redundant hot swappable power supply	
Signaalverwerking	Loop through Cropping, scaling with wall configuration	
Directe Ethernet-toegang	Built-in web server	
Grafische gebruikersinterface	All settings and operational parameters	
Interface van derden	WEB service API	
Garantie	2 years	

Laatst bijgewerkt: 12 Apr 2024

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.