
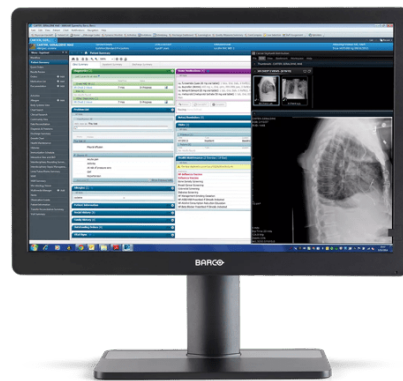


# Eonis 24" (MDRC-2324)

24" clinical display for hospital-wide viewing of clinical data and images

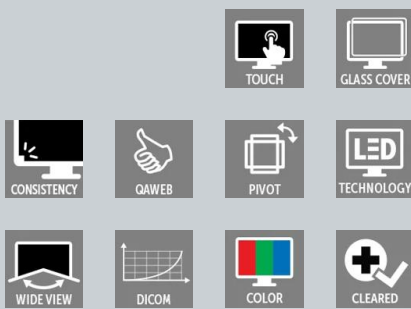

- 24" display for reviewing clinical images
- With front sensor for consistent images
- With remote QA management tools
- Different versions available

This 24" Eonis display has been built with healthcare specialists in mind. It combines consistent, high image quality and an attractive, versatile design with networked quality assurance. It's available in black and white.

### High image quality

The high-quality Eonis display presents sharp, bright images with high contrast and a wide viewing angle. Eonis uses the latest in advancements in LED backlight technology, ensuring a higher brightness that can be maintained over a longer period of time.

The display's unique front consistency sensor ensures fast power-up and continuous luminance stability. The image consistency makes collaboration between specialists easier. They can discuss images with colleagues at multiple locations, knowing that everyone is seeing identical images.

### Centralized quality assurance

Eonis comes complete with Barco's cloud-based QAWeb Enterprise software, an online service for automated calibration, Quality Assurance and asset management. Praised in hospitals around the world, QAWeb Enterprise allows healthcare IT and PACS administrators to centrally and remotely manage image quality across the healthcare organization, at the click of a button.

### Smart design, fit for purpose

Barco's Eonis display is safe to use in a clinical environment. The multiple mounting options and connections add to the smart design. The display is as high in brightness as it is low in power consumption. The lightweight form factor and packaging help reduce the environmental footprint of this product.

### Models

- MDRC-2324 (Option SNIB): standard brightness, no touchscreen or cover, internal power supply, black
- MDRC-2324 (Option STIB): standard brightness, touchscreen, internal power supply, black
- MDRC-2324 (Option HNIB): high brightness, no touchscreen or cover, internal power supply, black
- MDRC-2324 (Option HTEW): high brightness, touchscreen, external power supply, white
- MDRC-2324 (Option HPEW): high brightness, protective & anti-reflective glass, external power supply, white
- MDRC-2324 (Option HTIB): high brightness, touchscreen, internal power supply, black
- MDRC-2324 (Option HNEW): high brightness, no touchscreen or cover, external power supply, white

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

**Product specificaties****EONIS 24" (MDRC-2324)**

General specifications	
Schermt technologie	LCD
Actief schermformaat (diagonaal)	609.6 mm (24")
Formaat actief scherm (H x V)	518.4 mm x 324.0 mm (20.4 x 12.8")
Beeldverhouding (H:V)	16:10
Resolutie	2MP (1920 x 1200 pixels)
Pixelpitch	0.270 mm
Beeldkleur	Yes
Grijsbeeldvorming	Yes
Bit depth	30 bit
Kijkhoek (H, V)	178°
Voorgeprogrammeerde instellingen voor omgevingslicht	Yes, reading room selection
Voorsensor	Yes, Front Consistency Sensor
Maximale luminantie (paneel standaard)	Standard brightness versions (MDRC-2324 (option Sxxx)): 430 cd/m <sup>2</sup> High brightness versions (MDRC-2324 (option Hxxx)): 600 cd/m <sup>2</sup>
DICOM-gekalibreerde luminescentie	Standard brightness versions (MDRC-2324 (option Sxxx)): 250 cd/m <sup>2</sup> High brightness versions (MDRC-2324 (option Hxxx)): 350 cd/m <sup>2</sup>
Contrastverhouding (paneel standaard)	1000:1
Reactietijd ((stijgtijd + valtijd)/2) (standaard)	7 ms
Kleur behuizing	Black versions (MDRC-2324 (option xxxB)): RAL 9004 White versions (MDRC-2324 (option xxxW)): RAL 9003
Video-ingangssignalen	1 x DP, 1 x DVI-I
USB-poorten	1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream
Power rating	Black versions (MDRC-2324 (option xxxB)): 100-240 VAC, 50/60 Hz, 0.7-0.4A White versions (MDRC-2324 (option xxxW)): 12 VDC, 2.3A
Voedingsvereisten	White versions (MDRC-2324 (option xxxW)): This device shall only be powered by the following medical approved power supply: Adapter Tech., type ATM065T-P120 Ratings marked on the medical power supply: <ul style="list-style-type: none"> <li>■ Input rating: 100-240 VAC, 1.6-0.7 A, 50/60 Hz</li> <li>■ Output rating: 12 VDC, 5.0 A</li> </ul>
Energieverbruik	Standard brightness versions (MDRC-2324 option Sxxx): 20 W High brightness versions (MDRC-2324 option Hxxx): 25 W < 0.5 W (hibernate) < 0.5 W (standby)
Afmetingen met standaard (B x H x D)	Portrait: 383.0 x 577.1~629.1 x 201.3 mm Landscape: 568.0 x 420.6~530.6 x 201.3 mm
Afmetingen zonder standaard (B x H x D)	Portrait: 383.0 x 568.0 x 67.3 mm Landscape: 568.0 x 383.0 x 67.3 mm
Afmetingen verpakt (B x H x D)	760 x 513 x 235 mm
Nettogewicht met standaard	MDRC-2324 (option SNIB and HNIB): 6.8 kg MDRC-2324 (option STIB and HTIB): 7.8 kg MDRC-2324 (option HNEW): 6.6 kg MDRC-2324 (option HTEW): 7.7 kg MDRC-2324 (option HPEW): 7.6 kg

**Product specificaties****EONIS 24" (MDRC-2324)**

<b>Nettogewicht zonder standaard</b>	MDRC-2324 (option SNIB and HNIB): 4.6 kg MDRC-2324 (option STIB and HTIB): 5.6 kg MDRC-2324 (option HNEW): 4.4 kg MDRC-2324 (option HTEW): 5.5 kg MDRC-2324 (option HPEW): 5.4 kg
<b>Nettogewicht verpakt</b>	MDRC-2324 (option SNIB and HNIB): 8.8 kg (including optional accessories) MDRC-2324 (option STIB and HTIB): 9.8 kg (including optional accessories) MDRC-2324 (option HNEW): 8.9 kg (including optional accessories) MDRC-2324 (option HTEW): 10.0 kg (including optional accessories) MDRC-2324 (option HPEW): 9.9 kg (including optional accessories)
<b>Kanteling</b>	-5° to +22°
<b>Roteren</b>	0° to 90°
<b>Hoogteregebereik</b>	110 mm
<b>Montagestandaard</b>	VESA (100 mm)
<b>Bescherming van het scherm</b>	MDRC-2324 (option HPEW): Protective, anti-reflective glass MDRC-2324 (option STIB, HTIB and HTEW): PCAP touchscreen MDRC-2324 (option SNIB, HNIB and HNEW): None
<b>Aanbevolen procedures</b>	All digital images, except digital mammography.
<b>Certificeringen</b>	FDA Class I, 510(k) exempt CE (Medical Device Class I) CCC (China), KC (Korea), BIS (India), EAC (Russia)  Safety specific: IEC 60950-1:2005 + A1:2009 + A2:2013 EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 IEC 60601-1:2005 + CORR. 1:2006 + CORR. 2:2007 + AM1:2012 EN 60601-1:2006 + A1:2013 + A12:2014 ANSI/AAMI ES 60601-1:2005 + R1:2012 CAN/CSA C22.2 No. 60601-1:2014 EMI specific: IEC 60601-1-2: 2014 (ed4) EN 60601-1-2:2015 (ed4) FCC part 15 Class B ICES-003 Level B VCCI (Japan) Environmental: China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive
<b>Meegeleverde accessoires</b>	1x DisplayPort video cable 1x USB cable 1x printed User Guide (in English, other languages can be found on the documentation disc) 1x documentation disc 1x system sheet 1x external power supply for MDRC-2324 versions (xxEx) only Mains cables
<b>Optionele accessoires</b>	None
<b>Software voor kwaliteitsgarantie</b>	QAWeb
<b>Garantie</b>	3 years
<b>Bedrijfstemperatuur</b>	0 °C to 40 °C (15 °C to 35 °C within specs)
<b>Opslagtemperatuur</b>	-20 °C to 60 °C
<b>Vochtigheid in bedrijf</b>	8% to 80% (non-condensing)
<b>Vochtigheid bij opslag</b>	5% to 90% (non-condensing)
<b>Bedrijfsdruk</b>	70 kPa minimum
<b>Opslagdruk</b>	50 to 106 kPa

**Laatst bijgewerkt: 07 May 2024**

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg [www.barco.com](http://www.barco.com) voor de meest recente specificaties.