


HDF-W22

22,000 lumens, WUXGA, 3-chip DLP projector

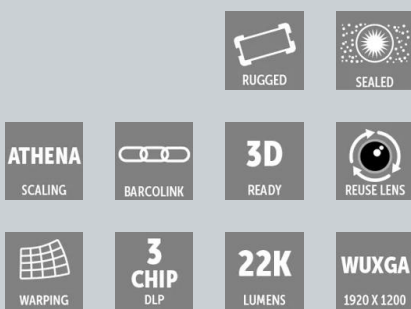

- **Advanced AthenaTM scaling technology**
- **Designed for life on the road**
- **Active 3D, quick preview, and wireless control**

The ultra-bright and reliable HDF-W22 projector is a perfect fit for any large venue or event that requires extra brightness to show clear, crisp images in a brightly lit environment.

Reliable and powerful projection

With a light output of 22,000 lumens, the HDF-W22 displays superior images even in venues with lots of ambient light. Thanks to its 3-chip DLP technology, Xenon illumination and high-contrast optical engine, the HDF guarantees crisp images with rich colors on every occasion. What's more, it is fully ready to support 3D projection. It has also been equipped with Barco's high-end ImagePRO technology with Athena scaler for flexible scaling.

Wireless control and preview mode

In addition, the versatile HDF-W22 offers extended wireless control features via smart phone or tablet computer. The HDF-W22's built-in color LCD screen provides all the information you need on your projector's status and allows you to preview your connected sources.

Designed for rental and staging

Building on Barco's experience in the rental and staging market with the proven FLM family, the HDF has been designed with the road in mind. Its compact and modular design make it simple to install and service. Equipped with a top or bottom frame, the rugged projector can easily be rigged as well.

Fast signal distribution

Our proprietary BarcoLink technology guarantees swift signal distribution between Barco's projectors and image processors. With BarcoLink, signals are distributed over a BNC coax cable, which is not only more durable but also enables you to lower your costs.

Ultra-bright, stunning images

- High-contrast 3-chip DLP™ engine
- WUXGA resolution (1920 x 1200)
- 22,000 center lumens
- Contrast ratio of 1900:1
- Xenon illumination
- ImagePRO technology inside (Athena scaler)
- Dual-core warp engine

Built for the rental & staging industry

- Fully sealed optics
- Extended wireless control options
- 3D ready
- Preview mode on LCD display
- Removable lamp house, power supply & electronics
- Low video delay (broadcast live events)
- Universal lamp house for all HDF projectors
- Easy to set up, install, service and transport thanks to modular design
- 58 dB noise level

Low total cost of ownership

- Sealed engine with constant image quality over time
- Projector designed for high resistance against external contamination
- Extended lamp warranty (500 hours)
- Customer can replace bulb
- Power-saving mode
- TLD+ lens range that is fully compatible with Barco's FLM and HDX projector series
- The HDF-W22 is upgradable to the HDF-W26, so you can spread your investment over time

Product specificaties**HDF-W22****General specifications**

Type projector	WUXGA 3-chip DLP digital projector
Technologie	0.96" DMD™ x3
Resolutie	1,920 x 1,200
Helderheid	22,000 center lumens / 20,000 ANSI lumens*
Contrastverhouding	1,900:1 (standard) / 2,200:1 (high contrast mode)
Helderheidsuniformiteit	90%
Beeldverhouding	16:10
ScenergiX	Horizontal and vertical edge blending
Type lens	TLD+
Lenzen	0.73:1 ; 1.2:1 ; 0.8-1.16 ; 1.16-1.5:1 ; 1.5-2.0:1 ; 2.0-2.8:1 ; 2.8-4.5:1 ; 4.5-7.5:1 ; 7.5-11.5:1
Optische lensverschuiving	Vertical: -30% to +120% / Horizontal: -40% to +40% on zoom lenses (memorized)
Kleurcorrectie	P7
Lampen	3.8 kW xenon
Levensduur lamp	1,000 Hrs
Transport met lamp	Yes
Lampbehuizing, snelle vervanging	Yes
Lampvervanging door klant	Yes
Lampgarantie (vervanging op locatie/in de fabriek)	90 days, 500 hours / pro rata 500 hours
Verzegelde DLP™-kern	Standard
Optische dowser	Standard
Picture-in-Picture	Two sources simultaneously
Oriëntatie	table -ceiling -side (portrait)* -vertical * lamp door down/bottom
Andere	can be controlled by DMX 512 console, warping
DMX 512	standard
WARP	Direct adjust OSD + toolset
Beeldverwerking	Embedded warp & blend engine
Trapeziumcorrectie	Yes
Geïntegreerde webserver	yes
CLU (constante lichtuitvoer)	Standard
3D	Active eyewear (optional), passive Infitec (optional), passive circular (optional), triple flash up to 200 HS
Ingangen	DVI-I (HDCP including analog RGB YUV), SDI/HDSDI/Dual HDSDI/3G/BarcoLink
Optionele ingangen	5-BNC RGBHV (RGBS/RGsB, YUV CS/SOY, Composite video, S-Video); DVI-I (HDCP including analog RGB YUV) + BarcoLink/SDI/HDSDI/Dual HDSDI/3G; 3D active input (HDMI/DisplayPort) feat. SENSIO 3D
Invoerresoluties	From NTSC up to QXGA (2,048 x 1,536)
Max. pixelklok	200 MHz
Softwaretools	Projector Toolset + Android app
Controle	XLR wired + IR, RS232, Wifi, GSM (opt)
Netwerkverbinding	10/100 base-T, RJ-45 connection, Wifi (optional)
Voedingsvereisten	200-240V / 50-60Hz
Max. energieverbruik	4,000W / STBY < 10W
Geluidsniveau (standaard bij 25°C/77°F)	58dB(A)
Operationele omgevingstemperatuur	0-40°C / 32°-104°F
Operationele vochtigheid	0-80% (non condens)
Dissipatie BTU	Max. 13660 BTU/h
Afmetingen (B x L x H)	707 x 1,025 x 548mm / 27.83 x 40.35 x 21.57 inches
Gewicht	99kg (218.25lbs)
Verzendingsafmetingen	(LxWxH) 1,200 x 980 x 760 mm / 47.24 x 38.58 x 29.92 inches
Verzendgewicht af fabriek	151kg (333lbs)
Standaardaccessoires	Power cord; wireless/XLR wired rugged remote control, bottom rigging kit/clamps
Certificeringen	Compliant with UL60950-1 and EN60950-1 complies with FCC rules & regulations, part 15 Class A and CE EN55022 Class A, RoHS
Garantie	3 years standard, extendable up to 5 years
*	+/-10%

Laatst bijgewerkt: 09 Jul 2024

© 2024 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Als gevolg van voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Controleer www.barco.com voor de nieuwste specificaties.