
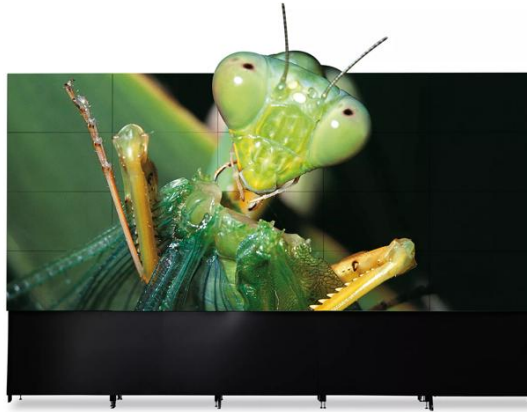


OverView OLS-521

Fully redundant 50" full HD 16:9 LED video wall with 3D

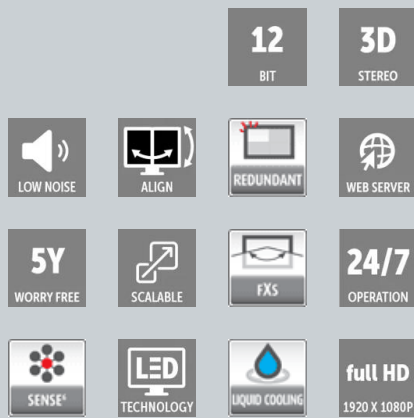

Barco's OverView OLS series LED-lit video walls bring 3D to video walls. They are the first choice for 16:9 mission-critical control rooms that require a guaranteed uptime and the need to show stereoscopic images (using active shutter glasses). The modules' high level of redundancy, not only of the individual LEDs, but also of the LEDs' power supplies and even inputs, ensures nothing can go wrong, giving users the peace of mind they need. Featuring a structure that can be tailored to the requirements of the customer, the OverView OLS series knows virtually no limits in size.

Ultimate peace of mind

Barco's unique liquid cooling system ensures lower LED temperature, resulting in longer LED lifetime (>80,000 hours in eco mode). Displaying the sharpest and most saturated colors in full HD resolution (1920x1080), the OverView OLS-521 offers an ergonomically excellent viewing experience.

Always the most optimal picture

OverView OLS series video walls come with Sense⁶, Barco's unique sensor technology that provides brightness and color stability over time and across the entire display. Sense⁶ continuously measures brightness and color by means of a high-quality spectrometer, and adjusts the color space to provide an image that is most convenient for the human eye. The resulting vivid colors result in an even more spectacular stereoscopic experience, and will contribute to the increasing deployment of 3D content on video walls.

Smarter design, without the gaps

The optional NoGap technology eliminates the gap traditionally found between the video wall cube screens. These gaps are necessary to compensate for changes in temperature and humidity. The special NoGap screens, however, are not subject to

The optional NoGap technology eliminates the gap traditionally found between the video wall cube screens. These gaps are necessary to compensate for changes in temperature and humidity. The special NoGap screens, however, are not subject to environmental conditions, so they can be placed immediately against one another. Additionally, the screens are incredibly robust, making them not only easy cleanable, but also earthquake-proof.

Highest level of redundancy

- 6x redundancy of LEDs (per color) & LED power supplies
- 2x redundancy of dual-link inputs

Unique Barco innovations

- Sense⁶ automatic full spectrum calibration
- Active liquid cooling

Excellent viewing ergonomics

- Vivid 3D using active shutter glasses
- Wide LED color gamut
- Full HD resolution
- No color break up
- Excellent off-axis viewing with next-generation screen types

Maintenance-free

- 80,000 hours LED lifetime in eco mode
- 5 years service-free runtime
- No color wheel needed

Green focus

- No wearing parts, no waste
- No mercury lamps needed

Product specifications**OVERVIEW OLS-521****General specifications**

Resolution	Full HD (1920 x 1080px)
Brightness	on-screen: 440/355 Cd/m ² in 2D/3D
On-screen contrast	560,000:1
Color	Up to 165% EBU (at maximum color mode)
Display technology	Rear projection DLP
White point	3,200/6,500/9,600/arbitrary
Screen	FXS, with H/V 34°/33° (+/-3°) half gain angle
Screen gap	Hor: 0.8 mm 0.03", Vert. 0.5 mm 0.02" (@ 25°C) Hor: < 0.4 mm 0.015", Vert. < 0.3 mm 0.012" (@ 30°C)
Screen gap with optional NoGap screen technology	Hor: 0.1 mm 0.004" Vert. 0.1 mm 0.004" All temperature/humidity conditions
Color stability	Self calibration with spectrometer based Sense ⁶
Dimensions	<ul style="list-style-type: none">• Diagonal: 50"• Width: 1,088 mm 42.8"• Height: 612 mm 24.1"• Depth: 454 mm 17.9"• Weight: Projection Module: < 44 kg 97 lbs• Weight: Pedestal: < 28 kg 62 lbs
Light source	6x redundancy for each of 3 LED's
Light source lifetime	> 60,000h (at 6500k) > 80,000h (eco mode) MTBF LED > 500,000 h
Power	350W (max) 230W (typ.) 170 (eco)
Signal	2x Dual link DVI in / 2x Dual link DVI out
Signal processing	Loop through Free cropping, free scaling (optional)
Direct ethernet access	Built in web server
Graphical user interface	All settings and operational parameters
Accessibility & servicing	Back
Integration to third party equipment	WEB service API
Stereoscopic 3D	yes
Conditions for operation	10°C --40°C, 50°F --104°F, 80% humidity (non-condensing)
Heat dissipation	580 BTU/h (eco) 785 BTU/h (typ.) 1,194 BTU/h (max)
Warranty	2 years

Last updated: 08 Jul 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.