


UDX-4K28

30,000 lumens, 4K UHD, 3-chip DLP laser phosphor large venue projector

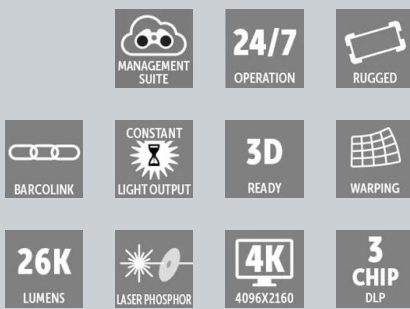

- **Stunning experiences thanks to high-brightness images**
- **Savings on installation and shipping time**
- **Laser phosphor light source for reduced costs**
- **24/7 operation**

The UDX range delivers stunning experiences and savings on installation and shipping time, reducing costs significantly. The most compact, high-brightness laser projectors with integrated cooling on the market bring reliable and razor-sharp 4K images to every type of event and venue.

The UDX-4K28 features 4K UHD and 30,000 lumens light output to ensure flawless shows with accurate colors. The Constant Light Output (CLO) also provides constant brightness and color over time. Users enjoy the widest color spectrum in the industry that matches the renowned Xenon quality and outperforms the Rec. 709 color space - without compromising on brightness.

Cut costs with laser projection

The laser phosphor light source reduces lamp-related costs, maintenance as well as image flicker. The result is a long lifetime and high reliability for minimal downtime, while compact and rugged design reduces shipping and labor costs. The modular components limit servicing time. You can also reuse your TLD+ lenses.

Faster processing for sharper images

The Barco Pulse 4K electronics offer an intuitive interface and flexible, user-friendly, embedded control software. Its Single Step Processing (SSP) allows for sharper images and less latency.

Product specifications**UDX-4K28****General Specifications**

Projector type	4K UHD 3-chip DLP digital projector
Technology	0.9" DMD™ x3
Resolution	2560 x 1600 (WQXGA native) 3840 x 2400 (4K UHD) 5120 x 3200 (processing)
Brightness	27,500 center lumens / 26,500 ansi lumens / 30,000 ISO
Contrast ratio	Full field 2200:1
Contrast ratio Barco DynaBlack®	20,000:1
Optical lens shift	Vertical between -100% to +130%, depending on lens Horizontal up to +/-40%, depending on lens Motorized zoom and focus (with lens memory on TLD lenses) Motorized lens shift (with position memory on all lenses)
Light source	Blue+Red laser phosphor with inorganic phosphor wheel
Brightness uniformity	95%
Light source lifetime @ 100% power, DynaBlack® off, towards 50% brightness	30,000 hrs
Color correction	P7
Optical dowser	Digital
Aspect ratio	16:10
Color space	REC 709+
Lenses	TLD+: 0.37-0.65-0.85 0.73:1; 1.2:1; 0.8-1.16; 1.25-1.6:1; 1.5-2.0:1; 2.0-2.8:1; 2.8-4.5:1; 4.5-7.5:1; 7.5-11.5:8
Orientation	360°
Color reproduction	P3 DCI (98%) with P7 color correction
Sealed DLP™ core	standard
Inputs	Single HDBaseT; HDMI™ 2.0 (HDCP2.2, HDR10); DP 1.2 (HDCP 1.3); Quad 3G-12G SDI / BarcoLink ULTRA / RJ45 Ethernet / RS232 / USB(5v) / 12V out/ BNC 3D sync in-out
Input resolutions	Including and up to: 3840 x 2400 @ 120HZ 4096 x 2160 @ 120H 2560 x 1600 @ 240Hz
Processing	Barco Pulse electronics
Web browser	Yes
Picture-by-picture	Two sources simultaneously
CLO (constant light output)	Yes
DMX 512	Yes
WARP	Direct adjust OSD + Ptoolset
ScenergiX	Horizontal and vertical edge blending
Image processing	Embedded warp & blend
Keystone correction	Yes
Integrated web server	Yes
Software tools	Projector Toolset + Android app + iOS app + Insights Management Suite (IMS)
Control	DMX, XLR wired + IR, RJ45, RS232, Wifi (optional), GSM (optional)
3D	Active eye wear (optional), passive circular (optional); 2 flash up to 200Hz*
24/7 operation	Yes
BTU per hour	Max. 8342 BTU/h
Optional Inputs	Quad DP1.2 / Fiber SFP
Storage temperature	-10°C to 60°C
operation humidity no condens	0-80% (non condense)
Max. pixel clock	600 Mhz
Storage humidity	5 -90% RH (no condense)
Network connection	10/100 base-T, RJ-45 connection, Wifi (optional)
Dimensions (WxLxH)	660 x 830 x 350 mm (25.98 x 32.67 x 13.77")
Weight	92kg (202 lbs) / shipping weight from factory: 110kg (242 lbs)
Power requirements	120-160V (reduced power)20A / 200-240V (+/-10%) 32A 50-60Hz
Operational humidity	0-80% (non condense)
Max. power consumption	120v: 2,450W nom/2,650W max. / 120v: 1800W nom/ 1900w max / STBY less than 10W
Noise level (typical at 25°C/77°F)	52dB(A)
Operational ambient temperature	0°-40°C/ 32°-104°F (45°C reduced power)
Dissipation BTU	Max. 8,342 BTU/h
Shipping Dimensions	(WxLxH) 800 x 1,200 x 685 mm (31.49 x 47.24 x 26.96" incl. palet)
Standard accessories	Power cord, wireless/XLR wired rugged remote control
Certifications	Compliant with UL60950-1 and EN60950-1 complies with FCC rules & regulations part 15 Class A and CE EN55022 Class A Rhos
Warranty	3 years
*Note	* Brightness levels +/-10% ** Wifi and GSM options are not available in all countries. Check with your Barco representative for more info. ***at higher altitude light output might be dimmed
*	Software upgradeable, please contact your local authorized Barco sales representative

Last updated: 02 Jun 2026

© 2026 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.