


# QDX-N4K35

35,000 lumens, native 4K, 3-chip DLP laser phosphor large venue projector

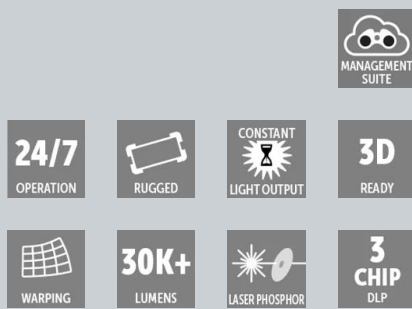

- **Stunning experiences thanks to high-brightness native 4K images**
- **Next-gen Pulse electronics with more processing power**
- **Durable design for maximized ROI**
- **Access to Barco's cloud-based Insights Management Suite**

Designed to deliver brighter, sharper, and lighter projections with unmatched speed, the QDX ensures immersive visuals that captivate audiences while offering an impressive return on investment.

### Unprecedented image quality

The QDX-N4K35 projector boasts ultra-high brightness capabilities of 35,000 lumens, providing clear and vibrant images in any setting. Utilizing the advanced Barco 0.98 DMD chip, it produces stunning native 4K picture quality with rich, lavish colors. Enhanced by our patented Pulse electronics, enjoy ultra-fast processing and high bandwidth support for smoother images and sharper pixels.

### Maximized ROI

The QDX is the world's most compact and lightest projector in its category, with everything at hand to maximize your ROI. It integrates seamlessly with your existing Barco equipment, including rental frames, flight cases, and TLD+ lenses. Fully compatible with Barco's smart peripherals and software tools, it ensures maximum return on your investment.

### High reliability

Built for longevity, the QDX projector maintains its stunning brightness and image quality over time. Its modular design allows for easy maintenance, advanced coatings safeguard critical electronics from humidity and harmful substances, and its air filter system ensures superior reliability and long-lasting performance even in the harshest environments.

**Product specifications****QDX-N4K35****General Specifications**

Notes	The specifications in this document are preliminary
Projector type	Native 4K 3-chip DLP digital projector
Technology	0.98" DMD™ x3
Resolution	4096 x 2176 (DC 4K Native)
Brightness	35000 ISO lumens 33000 center lumens* 31000 ANSI lumens
Contrast ratio	Full field 2,200:1
Contrast ratio Barco DynaBlack®	20,000:1
Optical lens shift	Vertical: up to 160%, down to 150% (motorized), depending on lens Horizontal: up to +/-50% (motorized), depending on lens with lens memory on TLD+ lenses
Light source	Blue+Red laser phosphor with inorganic phosphor wheel
Brightness uniformity	95%
Light source lifetime @ 100% power, DynaBlack® off, towards 50% brightness	25000 hrs
Color correction	Yes
Optical dowser	Yes
Aspect ratio	4096:2176
Lens type	TLD+
Lens range	TLD+: 0.37:1 ; 0.65-0.85:1 ; 0.8-1.16:1 ; 1.25 -1.6:1 ; 1.5-2.0:1 ; 2.0-2.8:1 ; 2.8-4.5:1 ; 4.5-7.5:1 ; 7.5-11.5:1
Color space	REC 709+, DCI-P3**
Orientation	360°
Sealed DLPTM core	Yes + DuraOptix™
Inputs	HDMI™ 2.1 (HDCP2.2 -HDR***)/ DP1.4 (HDCP 1.3)/ RJ45 Ethernet/ USB(5v)/ 12V out/ BNC 3D sync in-out
Input resolutions	Including and up to: 4096 x 2160 @ 120Hz 3840 x 2400 @ 120Hz 7680 x 4320 @ 30Hz
Output refresh rates	24-120Hz
Processing	Pulse electronics
Web browser	Yes
Picture-by-picture	Two sources simultaneously
CLO (constant light output)	Yes
DMX 512	Optional
Image processing	Embedded warp & blend
Keystone correction	Yes
Standby power	
Software tools	Pulse Toolset + Android app + iOS app + IMS ( <a href="http://www.barco.com/barco-pulse">www.barco.com/barco-pulse</a> )

**Product specifications****QDX-N4K35**

Control	DMX (optional), XLR wired (optional) + IR, RJ45, Wifi****, GSM****
3D	Active eye wear (optional), passive circular (optional); 2 flash up to 200Hz* 3D stereo formats: 1xHDMI™ 1xDP or Quad DP(optioN/A) top/ bottomsequential multi pipe.
BTU per hour	Max 8150 BTU/h
Operating temperature	0-40°C / 32°-104°F (reduce power > 40°C)
Optional Inputs	Quad DP1.2 Fiber SFP HDBaseT(Lite)/ HDMI™/ Quad-3G/ 12G/ DMX/ remote CTRL HDBaseT
Storage temperature	-10°C to 60°C
Operating humidity	0-80% (no condense)
Storage humidity	5 -90% RH
Network connection	10/100 base-T RJ-45 connection, wifi +GSM (connected models) IOT connected with IMS (in selected countries)
Dimensions (WxLxH)	660 x 830 x 350 mm / 25.98 x 32.67 x 13.77 inches
Weight	79 kg / 174 lbs
Shipping weight	92,5 kg / 202 lbs box + pallet 179 kg / 392 lbs flightcase + pallet
Power requirements	120-160V (reduced power)20A / 200-240V (+/-10%) 32A 50-60Hz
Power consumption	At 230v: 2400W typical/ 2700W max At 120v: 2200W typical/ 2300W max
Noise level (typical at 25°C/77°F)	49dB(A) / reduces when dimming
Circuit board protection	Advanced coatings safeguard critical electronics from humidity and harmful substances
Shipping dimensions (WxLxH)	800 x 1200 x 660 mm / 31.49 x 47.24 x 25.9 " incl. palet 800 x 970 x 510 mm / 31.5 x 38.1 x 20 " box only 1660 x 990 x 920 / 65.3 x 39 x 36.2 " incl. flightcase
Safety class	Laser Safety Class: RG3 Class 2
Standard accessories	Power cord wireless / XLR wired rugged remote control
Certifications	Compliant with UL60950-1 and EN60950-1 complies with FCC rules & regulations part 15 Class A and CE EN55032 Class A Rohs
Warranty	3 years
*Note	* Brightness levels +/-10%  ** With the option: DCI-P3 (R9803310)  *** Supporting HDR 10 ( HLG, EOTF, PQ EOTF SMPTE 2084), Tonemapping (EETF ITU-R BT2408-4 Annex 5)  **** Wifi and GSM options are not available in all countries. Check with your Barco representative for more info.

Last updated: 02 Jun 2026

© 2026 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.