


Njord Cinemascope

Njord Cinemascope has a pleasing calm uniform image and is designed for large screens or high ambient light environments.

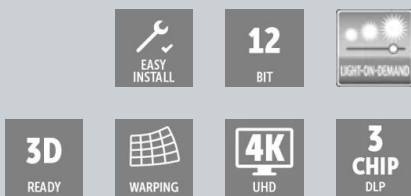

- Theater & Media Room Series
- 5K UHD Resolution (5,120 x 2,160)
- 3-Chip DLP
- Up to 9,000 ANSI Lumens

Njord Cinemascope inherits everything from Njord except the aspect ratio, Njord Cinemascope's high-capacity 2.37:1 aspect DLP engine.

Its exceptional design allows a cinemascope film to be shown without requiring an anamorphic lens.

The light source and optical engine are completely redesigned, made smaller, more efficient, and most importantly optimized for perfect cinematic colors compared to the older model Wodan.

Our Njord Cinemascope features a pleasing and uniform image with the power light up large cinemascope screens, whilst delivering an unbelievably detailed image with spectacular color fidelity for an unmatched experience that will delight even the most discerning clients.

Single Step Processing SSP™

Pulse is a hardware and software based platform that simplifies the signal allowing it to transmit from source to screen much faster and more efficiently.

We use an advanced image processing technique to display the image on the screen without any artefacts and with the lowest possible processing lag (<20ms with all image processing), this is made possible by our Single Step Processing (SSP™).

State of the art electronics

All new Pulse electronics have been designed to process 4K with HDMI 2.0a and HDCP 2.2 and the optical engine utilises the very latest 0.9" DMD DLP chipset, delivering 5,120 x 2,160 pixels to screen.



Njord CS also features HDR, motorised lenses and Barco's unique RealColor processing, enabling simple and accurate calibration to any desired color standard or white point.

Building Blocks

Njord Cinemascope offers 5K UHD resolution (5,120 x 2,160) for superb image quality.

Thanks to its modular design of only five building blocks, Njord CS is easy to service.

Njord CS is the most compact and rugged cinemascope projector offering 9,000 lumens light output currently available.

Laser Light Source

Outstanding image quality also requires an exceptional light source which is why we designed Njord CS with a brand new laser engine, significantly improving image uniformity (95%) over its predecessor.

Njord CS uses custom selected lasers to secure that we can deliver DCI/P3 color gamut.

Lasers last longer than traditional projector lamps, are not as fragile and offer nearly instant on/off.

技術仕様

NJORD CINEMASCOPE

一般仕様	
プロジェクタータイプ	Three chip DLP
使用技術	3 x 0.90" DMD™ with sealed core
解像度	5120 x 2,160 (5K UHD)
アスペクト比	2.37:1 (CinemaScope)
光源	Laser phosphor
光源寿命	Up to 20,000
光出力	Up to 9,000 ANSI Lumens Dimable to 4,000 lumens NOTE: Up to 6,940 ANSI Lumens @ 110v
CLO (コンスタント照明出力)	Yes
コントラスト比	20,000:1 (with DynaBlack enabled) 2,000:1 Sequential 600:1 ANSI
輝度均一性	>90%
レンズ群	(R9801661) -TLD+ (0.41:1) -90 Degree Lens (R9862001) -TLD+ (0.73 - 0.94:1) -90 Degree Lens (R9801414) -TLD+ (0.92 - 1.33:1) (R9862005) -TLD+ (1.24 - 1.56:1) (R9862010) -TLD+ (1.49 - 2.02:1) * (R9862020) -TLD+ (2.01 - 2.76:1) * (R9862030) -TLD+ (2.69 - 4.41:1) * (R9862040) -TLD+ (4.37 - 7.35:1) * (R9829997) -TLD+ (6.95 - 10.83:1) * Standard Lens Option(s)
光学レンズシフト	Up to 97% shift up, 76% down, & up to 28% horizontal lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information Download Lens & Airflow Data Here
光学ダウザー	Yes
色補正	P7 RealColor™
色階調	Up to DCI (P3)
画像処理	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
方向	360° Rotation
ネットワーク接続	10/100 Ethernet via RJ45 connection
統合ウェブ・サーバー	Yes
診断機能	via Prospector web interface
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details

技術仕様**NJORD CINEMASCOPE**

入力	1 x HDMI™ 2.0 (HDCP 2.2) 2 x HDBaseT (HDCP 1.4 -9Gbps only) 1 x Display Port 1.2 Quad 3G / 12G SDI / BarcoLink 1 x RJ45 Ethernet 1 x RS232 1 x USB 2 x DMX (1 x Input / 1 x Output) 1 x XLR for Wired Remote 2 x 3D Sync (1 x Input / 1 x Output) Optional Upgrade: Quad DP1.2
入力解像度	HDMI™: Up to 4,096 x 2,160 @ 24/25/30/50/60Hz DisplayPort (Single Input): Up to 4,096 x 2,160 @ 24/30/50/60Hz via Optional Quad DP1.2 Input Card DisplayPort (Layout Mode: 2 x 2) *: Up to 1,920 x 1,080 @ 120Hz Up to 2,048 x 1,080 @ 120Hz DisplayPort (Layout Mode: 4 x 1) *: Up to 960 x 2,160 @ 120Hz * Specialist GFX cards may be required
遅延	TBD
制御	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant WiFi (Optional), XLR Wired Remote, GSM (Optional)
電源要件	110 -130V / 200 -240V / 50 -60Hz
消費電力	110V: 1,347W Max, measured in 20-25°C / 68-77°F 230V: 1720W Max 20-25°C / 68-77°F Power consumption will increase if ambient temperatures increases above 25°C / 77°F
ノイズ・レベル (25°C/77°F での標準時)	46 dB(A)
動作温度	0 to 40 °C at Sea Level Optimal Set Point: 20 °C
動作湿度	0 to 80% (relative humidity)
BTU / 時間	Max. 5,875 BTU/h @ 200 -240V Max. 4,599 BTU/h @ 110 -130V

技術仕様

NJORD CINEMASCOPE

エアフロー要件	Air Inlet (from Rear w/Feet Down): Front / Top / Right Exhaust (from Rear w/Feet Down): Rear Clearance Requirements: Front: 40cm Left: 1cm Right: 40cm Rear: 40cm Top: 40cm
排気の流れ	152 ft ³ /min @ 25 °C 258 m ³ /hour @ 25 °C Download Lens & Airflow Data Here
寸法 幅×長さ×高さ	Excluding Lens 540 x 725 x 355 mm 21.26 x 28.54 x 14 in.
重量	Excluding Lens 48kg / 105bs
発送寸法 (WxLxH)	Including Pallet -Excluding Lens (Packaged Separately) 850 x 665 x 613 mm 33.46 x 26.18 x 24.13 in.
発送重量	TBD
標準アクセサリ	Power Cord / Remote Control
証明書	CE, FCC Class A and cCSAus
安全要件	This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 2.3 is installed. Refer to the installation manual for further information.
保証	Limited 3 years parts and labor Extendable up to 5 years
*	Firmware upgradable Please contact an authorized Barco representative for details

生成日:27 Mar 2024

技術仕様は予告なく変更する場合があります。最新情報については、www.barco.com をご覧ください。