


Galaxy 4K-12 HFR

3D stereo, 12,000 lumens, 4K three-chip DLP projector

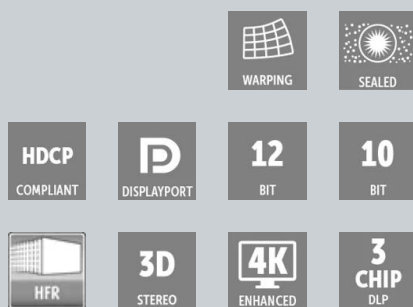

With its 4K (4096x2160) resolution and 12,000 lumens light output, Barco's Galaxy 4K-12 projector brings high-fidelity 3D imagery to virtual reality installations worldwide.

The Galaxy 4K-12 features patented color convergence technology. In addition to the excellent color saturation of three-chip DLP technology, the projector also ensures solid color and brightness uniformity. For high fidelity 3D applications with full 4K resolution, the Galaxy 4K projector is what you seek.

3D stereo flexibility

Thanks to the projector's 4K resolution, important details are more visible than ever, whether in design models or in layers of geophysical data. With active 3D stereo and optional active Infitec Excellence 3D in its native 4K resolution, you can choose the type of 3D stereo that fits you best. The Galaxy 4K-12 HFR does 120hz stereo based upon frame doubling 2x60hz.

Its new active Infitec Excellence filters offers 40% more stereo lumens and excellent stereo separation between left and right eye content.

In for the long haul

With a sealed optical engine and enhanced display chip cooling, Barco's Galaxy 4K series makes sure its core components don't falter over time. In addition, the Galaxy 4K's modular design ensures quick servicing and increases uptime, and its user-friendly interface makes diagnostic and setup operations a breeze. This includes a choice between direct lamp replacement and full lamp house swaps, depending on your needs.

Product specifications**GALAXY 4K-12 HFR**

General specifications	
Digital MicroMirror Device™	3 x 1.38" DC4K dark metal devices
Native resolution	4,096 x 2,160 pixels
Housing	Hermetically sealed DMDs and optical assembly
Lamp	2kW (Xenon lamp)
Light output	12,000 lumens (2kW lamp)
Screen size	Up to 23m / 75 ft wide
Contrast ratio	2,000:1
Digital Video Inputs	2 x DisplayPort 1.1a, 2 x 3G-SDI SMPTE 292/424, HDMI 1.4a on projector 4 x DisplayPorts 1.1a and 4 x 3-pin Mini Din stereo inputs on MCM-400
Control I/O	Ethernet, 8x GPIO, Serial RS232
Prime lenses	Fixed focal 0.72, 0.9:1 lenses for on-axis usage 1.13 -1.66 zoom lens
Projector diagnostics	via PC touch panel via Communicator control software via SNMP agent
Power requirements	200-240V 17A 50-60Hz 12,000 BTU/hr (with 2kW lamp)
Dimensions	604(H) x 754(W) x 1129(D) mm 23.78(H) x 29.69(W) x 44.45(D) inch NB.: min. 5 cm of air inlet spacing required at the bottom of projector
Weight	134 kg (295 lbs)
Ambient temperature	35°C / 95°F Max.
Exhaust airflow	350 -390 CFM (10 -11 m ³ /min)
Standard Features	Full 4K mono and 120 Hz 4K 3D on-screen active stereo capabilities Frame doubled/Dual Flash 3D: 60hz -> 120Hz 4K 3D Active stereo support CLO (Constant Light Output) Powerful SNMP agent Motorized/memorized lens (focus & shift) HDCP support Advanced patented DMD cooling
Image processing device	MCM-400 HFR is standard offered as package with the projector to further expand input flexibilities and allow multi channel usage.

Last updated: 15 Mar 2023

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.