

# Coronis Fusion 6MP (MDCC-6530)

6MP diagnostic color display system



- **Color fusion display for flexible multimodality imaging**
- **With toolset to spark productivity**
- **Automated QA and calibration**

## **A brighter diagnosis**

Coronis Fusion, Barco's renowned multi-modality display for radiologists, now comes in a new, energy-efficient and lightweight design. Bright on so many levels, Coronis Fusion has been designed to help radiologists provide care with confidence.

See more details quickly thanks to the high brightness, high contrast ratio and best-in-class image quality. What's more, the wide color gamut in combination with SteadyColor™ calibration technology helps you see even more colors and more details on the 30-inch screen.

## **Smart workflow**


Designed for your comfort and to boost productivity, Coronis Fusion comes with smart image-enhancing features and workflow tools. The display's wide viewing angle combined with the SoftGlow™ task and wall light help reduce eye strain. Thanks to SpotView, radiologists can further improve detection accuracy as well as reading productivity.

## **Effortless quality & compliance**

Like all of Barco's medical display systems, Coronis Fusion comes with QAWeb Enterprise, a cloud-based technology for automated calibration, Quality Assurance and compliance to ensure maximum uptime of the display with no need for human intervention.

## **A one-stop-shop solution**

Barco medical display systems include exclusive display controllers that are validated with the latest workstations and with all major PACS applications. All components are under the full 5-year warranty (including the display backlight) for complete peace of mind.

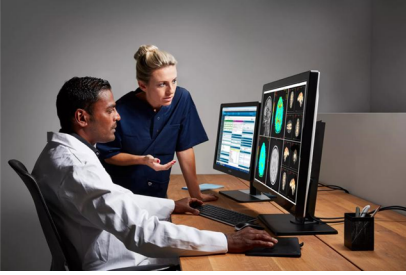

### Ensuring diagnostic confidence with MDR Class IIa

Our radiology displays are MDR-certified as Class IIa. Their product information has been reviewed and cleared by independent medical and technical experts, and is audited yearly. In other words, we ensure diagnostic confidence and peace of mind for our users.

### Models

- MDCC-6530: includes protective, anti-reflective glass cover
- MDCC-6530 NC: without cover

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

**Product specificaties****CORONIS FUSION 6MP (MDCC-6530)**

General specifications	
Scherntechnologie	IPS
Actief schermformaat (diagonaal)	772 mm (30.4")
Formaat actief scherm (H x V)	654 x 409 mm (25.8 x 16.1")
Beeldverhouding (H:V)	16:10
Resolutie	Native 6MP (3280 x 2048 pixels) Configurable to 2 x 3MP+ (1640 x 2048 pixels) Configurable to 2 x 3MP (1536 x 2048 pixels)
Pixelpitch	0.1995 mm
Beeldkleur	Yes
Grijsbeeldvorming	Yes
Bit depth	30 bit
Kijkhoek (H, V)	178°
Uniform Luminance Technology (ULT)	Color PPU
Steady Color	Yes, when used as system with MXRT-x600 display controller or later, using Barco MXRT driver 10.171.1.0 or later and with QAWeb Enterprise 2.2 or later.
Voorgeprogrammeerde instellingen voor omgevingslicht	Yes, reading room selection
Ambient light sensor	Yes
Voorsensor	Yes, I-Guard
Maximale luminantie (paneel standaard)	1050 cd/m <sup>2</sup>
DICOM-gekalibreerde luminescentie	600 cd/m <sup>2</sup>
Contrastverhouding (paneel standaard)	2000:1
Reactietijd ((stijgtijd + valtijd)/2) (standaard)	18 ms
Kleur behuizing	Black / White
Video-ingangssignalen	2x DisplayPort 1.2
Video-uitgangssignalen	1x DisplayPort (MST)
USB-poorten	1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream 1x USB 2.0 downstream with high-power charging functionality
Power rating	100-240 Vac, 50/60 Hz, 3.6-1.6 A
Energieverbruik	80 W (nominal) @ calibrated luminance of 600 cd/m <sup>2</sup> < 0.5 W (hibernate) < 0.5 W (standby)
Afmetingen met standaard (B x H x D)	714 x 524~624 x 240 mm
Afmetingen zonder standaard (B x H x D)	714 x 478 x 74 mm
Afmetingen verpakt (B x H x D)	800 x 650 x 295 mm
Nettogewicht met standaard	MDCC-6530: 17.7 kg MDCC-6530 NC: 16.3 kg
Nettogewicht zonder standaard	MDCC-6530: 13.1 kg MDCC-6530 NC: 11.7 kg
Nettogewicht verpakt	MDCC-6530: 22.3 kg (without optional accessories) MDCC-6530 NC: 20.9 kg (without optional accessories)
Kanteling	-5° to +25°
Zwenking	-30° to +30°

**Product specificaties****CORONIS FUSION 6MP (MDCC-6530)**

Roteren	N/A
Hoogteregelsbereik	100 mm
Montagestandaard	VESA (100 mm)
Bescherming van het scherm	MDCC-6530: Protective, anti-reflective glass cover MDCC-6530 NC: No cover
Aanbevolen procedures	All digital images, except digital mammography
Certificeringen	CE0123 (Medical Device) FDA 510(k) K191845 CCC (China) KC (Korea) BIS (India) EAC (Russia, Kazakhstan, Belarus, Armenia and Kyrgyzstan) INMETRO (Brazil -Product numbers K9301636B, K9301637B, K9301638B, K9301638B1X, K9301638B1X) Safety specific: IEC 60950-1:2005 + A1:2009 EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 IEC 60601-1:2005 + A1:2012 EN 60601-1:2006 + A1:2013 + A12:2014 IEC 62368-1:2018 EN 62368-1:2020 + A11:2020 ANSI/AAMI ES 60601-1:2005 + R1:2012 CAN/CSA C22.2 No. 60601-1:2014  EMI specific: IEC 60601-1-2:2014 (ed.4) EN 60601-1-2:2015 (ed.4) FCC part 15 Class B ICES-001 Level B VCCI (Japan)  Environmental: China Energy Label EU RoHS China RoHS REACH Canada Health WEEE Packaging Directive
Meegeleverde accessoires	User guide Documentation disc System sheet Video cables Mains cables USB cable
Optionele accessoires	Graphics board Touch pad
Software voor kwaliteitsgarantie	QAWeb
Garantie	5 years, including 40000 hrs backlight warranty
Bedrijfstemperatuur	0 °C to 35 °C (10 °C to 30 °C within specs)
Opslagtemperatuur	-20 °C to 60 °C
Vochtigheid in bedrijf	20% to 85% (non-condensing)
Vochtigheid bij opslag	20% to 85% (non-condensing)
Bedrijfsdruk	70 kPa minimum
Opslagdruk	50 to 106 kPa

**Laatst bijgewerkt: 12 Feb 2024**

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg [www.barco.com](http://www.barco.com) voor de meest recente specificaties.