


OverView KVL-621

Industry-standard 60" full HD 16:9 LED video wall

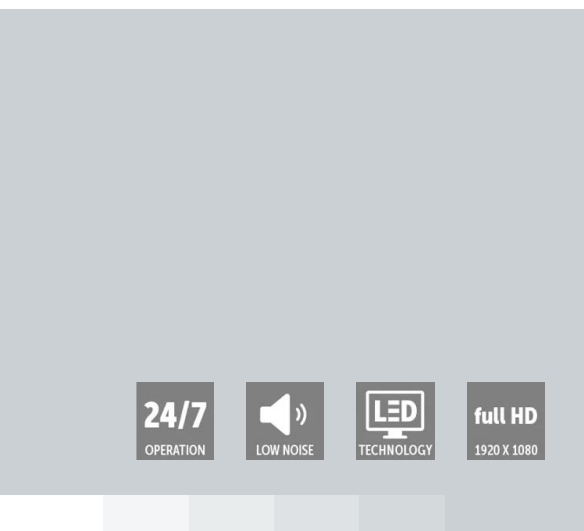

With the OverView KVL series, Barco has launched a display range that has a well balanced set of essential features, perfectly fitting the standard requirements. All this comes without any compromise in quality, and with a special focus on limiting both the initial purchase as the runtime cost.

The OverView KVL-621 is an easy to operate 16:9 LED-lit projection module that has been designed to offer the typical detail, brightness, and features in full HD resolution for demanding small to medium-sized control rooms.

Unmatched LED lifetime

Barco's unique cooling system significantly reduces the temperature of the LEDs. This not only prolongs the lifetime of the LEDs (>80,000 hrs), but also allows for durably higher brightness levels. The long LED lifetime guarantees a great uptime and very low overhead costs. The latest LED technology ensures that the power consumption is 30% lower than comparable products.

Comfortable viewing experience

To ensure good wall uniformity in terms of color and brightness levels, the OverView KVL-621 comes with Barco's Sense5 automatic calibration system. This system works with an advanced color sensor that continuously measures the primary color levels of the entire wall, and adjusts white point and color when needed. This results in a significantly more accurate cube to cube uniformity, over the complete runtime. Furthermore, the module's robust structure makes the OverView KVL-621 suitable for use in industrial environments.

Key characteristics

- 6x redundancy of LEDs (per color)
- Sense5 automatic white point and primary colors calibration, for brightness and color stability
- Unique cooling system ensures longer LED lifetime
- Low power design
- Wide color gamut
- Less disposables, less waste
- 16:9 aspect ratio

Product specificaties**OVERVIEW KVL-621**

General specifications	
Signaalingang/-uitgang	Dual link DVI in / Dual link DVI out
Pixelklok	320 MHz
Ingangsfrequentie	24 – 62 Hz
Genlock	49 – 61 Hz
Grafische gebruikersinterface	All settings and operational parameters
Garantie	2 years
Helderheid	on-screen: 320 Cd/m ²
Weergavetechnologie	DLP rear projection
Kleurenspectrum	EBU
Signaalverwerking	Loop through up to 10 cubes Cropping / upscaling
Directe Ethernet-toegang	Built-in web server
Wit punt	6500K, 3200K fix
Interface van derden	WEB service API (optional)
Lichtbron	Light source 6x redundancy for each of 3 LEDs
Kleurstabiliteit	Self calibration with Sense ⁵ based on advanced color sensor
Ingangsspanning	90 – 240 V, 50-60Hz
Helderheidsuniformiteit	>95%
Resolutie	1920x1080
Gebruiksomstandigheden	10°C-40°C, 80% humidity (nc)
Levensduur lichtbron	> 60,000h (typ.) > 80,000h (eco) MTBF LED: > 500,000h
Scherm	WV-FEL
Vermogen	90W (eco) 150W (typ.) 180W (max)
Afmetingen	<ul style="list-style-type: none">Diagonal: 60"Width: 1328 mm 52"Height: 747 mm 29"Depth: 1056 mm 42"Weight: 106.5 kg 234.8 lbs
Ruimte tussen schermen	< 1 mm 0.04" (@25°C) < 0.2 mm 0.0079" (at higher temperatures)
Warmtedissipatie	310 BTU/h (eco) 510 BTU/h (typ.) 610 BTU/h (max)
Contrast op scherm	1,200,000:1 (dynamic) 1,600:1 (typ)

Laatst bijgewerkt: 21 Jun 2023

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.