


QDX-N4K25

23,000 lumens, native 4K, 3-chip DLP laser phosphor large venue projector

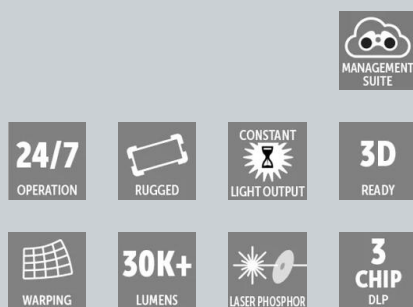

- **Stunning experiences thanks to high-brightness native 4K images**
- **Next-gen Pulse electronics with more processing power**
- **Durable design for maximized ROI**
- **Access to Barco's cloud-based Insights Management Suite**

Designed to deliver brighter, sharper, and lighter projections with unmatched speed, the QDX ensures immersive visuals that captivate audiences while offering an impressive return on investment.

Unprecedented image quality

The QDX-N4K25 projector boasts ultra-high brightness capabilities of 23,000 lumens, providing clear and vibrant images in any setting. Utilizing the advanced Barco 0.98 DMD chip, it produces stunning native 4K picture quality with rich, lavish colors. Enhanced by our patented Pulse electronics, enjoy ultra-fast processing and high bandwidth support up to 8K@60Hz or 4K@240Hz for smoother images and sharper pixels.

Maximized ROI

The QDX is the world's most compact and lightest projector in its category, with everything at hand to maximize your ROI. It integrates seamlessly with your existing Barco equipment, including rental frames, flight cases, and TLD+ lenses. Fully compatible with Barco's smart peripherals and software tools, it ensures maximum return on your investment.

High reliability

Built for longevity, the QDX projector maintains its stunning brightness and image quality over time. Its modular design allows for easy maintenance, and its advanced air filter system ensures reliable performance even in the harshest environments.

Product specifications

QDX-N4K25

General specifications

Notes	The specifications in this document are preliminary
Projector type	Native 4K 3-chip DLP digital projector
Technology	0.98" DMD™ x3
Resolution	4096 x 2176 (DC 4K Native)
Brightness	23000 center lumens*
	25000 ISO lumens
Contrast ratio	Full field 2.200:1
Contrast ratio Barco DynaBlack®	20.000:1
Optical lens shift	Vertical: up to -150% to +130% (motorized) Horizontal: up to +/-50% (motorized) with lens memory on TLD+ lenses
Light source	Blue+Red laser phosphor with inorganic phosphor wheel
Brightness uniformity	95%
Light source lifetime	30000 hrs (100% power, DynaBlack® off)
Color correction	Yes
Optical dowsner	Yes
Aspect ratio	4096:2176
Lens type	TLD+
Lens range	TLD+: 0.37:1 ; 0.65-0.85:1 ; 0.8-1.16:1 ; 1.25-1.6:1 ; 1.5-2.0:1 ; 2.0-2.8:1 ; 2.8-4.5:1 ; 4.5-7.5:1 ; 7.5-11.5:1
Color space	REC 709 +
Orientation	360°
Sealed DLP™ core	Standard
Inputs	HDMI™ 2.1 (HDCP2.2 -HDR****)/ DP1.4 (HDCP 1.3) / RJ45 Ethernet / USB(5v) / 12V out/ BNC 3D sync in-out
Input resolutions	Including and up to: 4096 x 2160 @ 240Hz 3840 x 2400 @ 240Hz 7680 x 4320 @ 60Hz
Processing	Pulse electronics
Web browser	Yes
Picture-by-picture	Two sources simultaneously
CLO (constant light output)	Yes
DMX 512	Optional
Image processing	Embedded warp & blend
Keystone correction	Yes
Standby power	TBD
Software tools	Pulse Toolset + Android app + iOS app + IMS
Control	DMX (optional), XLR wired (optional) + IR, RJ45, Wifi**, GSM**
3D	Active eye wear (optional), passive circular (optional); 2 flash up to 200Hz* 3D stereo formats: 1xHDMI™ 1xDP or Quad DP(option/All) top/ bottomsequential multi pipe.
24/7 operation	Yes
BTU per hour	TBD
Operating temperature	0-40°C / 32*-104°F* (reduce power > 40°C)
Optional Inputs	Quad DP1.2 Fiber SFP HDBaseT(Lite)/ HDMI™/ Quad-3G/ 12G/ DMX/ remote CTRL HDBaseT
Storage temperature	-10°C to 60°C
Operating humidity	0-80% (no condense)
Storage humidity	5 -90% RH
Network connection	10/100 base-T RJ-45 connection Wifi
Dimensions (WxLxH)	660 x 830 x 350 mm / 25.98 x 32.67 x 13.77 inches
Weight	79 kg / 174 lbs
Shipping weight	92.5 kg / 202 lbs box + pallet 179 kg / 392 lbs flightcase + pallet
Power requirements	120-160V (reduced power)20A / 200-240V (+/-10%) 32A 50-60Hz
Power consumption	TBD
Noise level (typical at 25°C/77°F)	
Shipping dimensions (WxLxH)	800 x 1200 x 660 mm / 31.49 x 47.24 x 25.9 " incl. pallet 800 x 970 x 510 mm / 31.5 x 38.1 x 20 " box only 1660 x 990 x 920 / 65.3 x 39 x 36.2 " incl. flightcase
Safety class	Laser Safety Class: RG3 Class 2
Standard accessories	Power cord wireless / XLR wired rugged remote control
Certifications	Compliant with UL60950-1 and EN60950-1 complies with FCC rules & regulations part 15 Class A and CE EN55032 Class A Rohs
Warranty	3 years
*Note	* Brightness levels +/-10%

** Wifi and GSM options are not available in all countries. Check with your Barco representative for more info.

Last updated: 18 Aug 2025

© 2025 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.