


Hodr

Hodr has a pleasing calm uniform image and is designed for large screens or high ambient light environments.

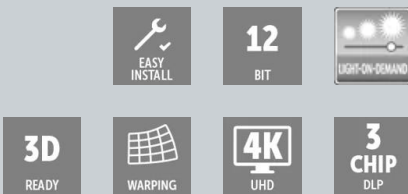

- Theatre & Media room Series
- 4K UHD Resolution (3840 x 2,160)
- 3-Chip DLP
- Up to 7,500 ANSI Lumens

Hodr delivers perfect cinematic colors, supporting DCI/P3 color gamut.

Our Hodr features a pleasing and uniform image with the power light up medium to large screens, whilst delivering an unbelievably detailed image with spectacular color fidelity for an unmatched experience that will delight even the most discerning clients.

Single Step Processing SSP™

Pulse is a hardware and software based platform that simplifies the signal allowing it to transmit from source to screen much faster and more efficiently. We use an advanced image processing technique to display the image on the screen without any artefacts and with the lowest possible processing lag (<20ms with all image processing), this is made possible by our Single Step Processing (SSP™).

State of the art electronics

All new Pulse electronics have been designed to process 4K with HDMITM 2.0a and HDCP 2.2 and the optical engine utilises the very latest 0.9" DMD DLP chipset, delivering 3,840 x 2,160 pixels to screen. Hodr also features HDR, motorised lenses and Barco's unique RealColor processing, enables simple and accurate calibration to any desired color standard or white point.

Building Blocks

Hodr offers 4K UHD resolution (3,840 x 2,160) for superb image quality. Thanks to its modular design of only five building blocks, Hodr is easy to service.

Laser Light Source

Outstanding image quality also requires an exceptional light source which is why we designed Hodr with a brand new laser engine, significantly improving image uniformity (95%) over its predecessor. Hodr uses custom selected lasers to secure that we can deliver DCI/P3 color gamut.

Lasers last longer than traditional projector lamps, are not as fragile and offer nearly instant on/off.

Product specificaties**HODR**

General specifications	
Type projector	Three chip DLP
Technologie	3 x 0.90" DMD™ with sealed core
Resolutie	3,840 x 2,160 (4K UHD)
Beeldverhouding	1.78:1 (16:9)
Lichtbron	Laser phosphor
Levensduur lichtbron	Up to 20,000
Lichtuitvoer	Up to 7,500 ANSI Lumens Dimable to 4,000 lumens
CLU (constante lichtuitvoer)	Yes
Contrastverhouding	20,000:1 (with DynaBlack enabled) 2,000:1 Sequential 600:1 ANSI
Helderheidsuniformiteit	>90%
Lensbereik	(R9801661) -TLD+ (0.41:1) -90 Degree Lens (R9862001) -TLD+ (0.73 - 0.94:1) -90 Degree Lens (R9801414) -TLD+ (0.92 - 1.33:1) (R9862005) -TLD+ (1.24 - 1.56:1) (R9862010) -TLD+ (1.49 - 2.02:1) * (R9862020) -TLD+ (2.01 - 2.76:1) * (R9862030) -TLD+ (2.69 - 4.41:1) * (R9862040) -TLD+ (4.37 - 7.35:1) * (R9829997) -TLD+ (6.95 - 10.83:1) * Standard Lens Option(s)
Optische lensverschuiving	Up to 73% vertical lens shift & up to 28% horizontal lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information Download Lens & Airflow Data Here
Optische dowser	Yes
Kleurcorrectie	P7 RealColor™
Kleurenspectrum	Up to DCI (P3)
Beeldverwerking	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
Oriëntatie	360° Rotation
Netwerkverbinding	10/100 Ethernet via RJ45 connection
Geïntegreerde webserver	Yes
Diagnose	via Prospector web interface
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details

Product specificaties

HODR

Ingangen	<p>1 x HDMI™ 2.0 (HDCP 2.2) 2 x HDBaseT (HDCP 1.4 -9Gbps only) 1 x Display Port 1.2 Quad 3G / 12G SDI / BarcoLink</p> <p>1 x RJ45 Ethernet 1 x RS232 1 x USB 2 x DMX (1 x Input / 1 x Output) 1 x XLR for Wired Remote 2 x 3D Sync (1 x Input / 1 x Output)</p> <p>Optional Upgrade: Quad DP1.2</p>
Invoerresoluties	<p>HDMI™: Up to 4,096 x 2,160 @ 24/25/30/50/60Hz</p> <p>DisplayPort (Single Input): Up to 4,096 x 2,160 @ 24/30/50/60Hz</p> <p>via Optional Quad DP1.2 Input Card</p> <p>DisplayPort (Layout Mode: 2 x 2) *: Up to 1,920 x 1,080 @ 120Hz Up to 2,048 x 1,080 @ 120Hz</p> <p>DisplayPort (Layout Mode: 4 x 1) *: Up to 960 x 2,160 @ 120Hz</p> <p>* Specialist GFX cards may be required</p>
Latentie	TBD
Controle	<p>IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant</p> <p>WiFi (Optional), XLR Wired Remote, GSM (Optional)</p>
Voedingsvereisten	110 -130V / 200 -240V / 50 -60Hz
Energieverbruik	<p>110V: 1,321W Max, measured in 20-25°C / 68-77°F</p> <p>230V: 1256W Max 20-25°C / 68-77°F</p> <p>Power consumption will increase if ambient temperatures increases above 25°C / 77°F</p>
Geluidsniveau (standaard bij 25°C/77°F)	43 dB(A)
Bedrijfstemperatuur	<p>0 to 40 °C at Sea Level Optimal Set Point: 20 °C</p>
Operationele vochtigheid	0 to 80% (relative humidity)
BTU/uur	<p>Max. 4,288 BTU/h @ 200 -240V Max. 4,516 BTU/h @ 110 -130V</p>
Luchtstroomvereisten	<p>Air Inlet (from Rear w/Feet Down): Front / Top / Right Exhaust (from Rear w/Feet Down): Rear</p> <p>Clearance Requirements: Front: 40cm Left: 1cm Right: 40cm Rear: 40cm Top: 40cm</p>

Product specificaties**HODR**

Luchtuitstroom	152 ft ³ /min @ 25 °C 258 m ³ /hour @ 25 °C Download Lens & Airflow Data Here
Afmetingen (B x L x H)	Excluding Lens 540 x 725 x 355 mm 21.26 x 28.54 x 14 in.
Gewicht	Excluding Lens 48kg / 105bs
Verzendingsafmetingen (L x B x H)	Including Pallet -Excluding Lens (Packaged Separately) 850 x 665 x 613 mm 33.46 x 26.18 x 24.13 in.
Verzendgewicht	TBD
Standaardaccessoires	Power Cord / Remote Control
Certificeringen	CE, FCC Class A and cCSAus
Veiligheidsvereisten	This projector may become Risk Group 3 (RG3) when an interchangeable lens with throw ratio greater than 2.3 is installed. Refer to the installation manual for further information.
Garantie	Limited 3 years parts and labor Extendable up to 5 years
*	Firmware upgradable Please contact an authorized Barco representative for details

Laatst bijgewerkt: 27 Mar 2024

© 2018 Barco nv. Alle rechten voorbehouden. Gehele of gedeeltelijke reproductie zonder schriftelijke toestemming is verboden. Alle merknamen en productnamen zijn handelsmerken, geregistreerde handelsmerken of handelsnamen van hun respectieve houders. Vanwege voortdurende innovatie kunnen informatie en technische specificaties zonder voorafgaande kennisgeving worden gewijzigd. Raadpleeg www.barco.com voor de meest recente specificaties.